



# Wisconsin Department of Transportation

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

February 24, 2020

### NOTICE TO ALL CONTRACTORS:

**Proposal #21: 1166-00-79, WISC 2020 078**  
**Stevens Point - Wausau**  
**N 2<sup>nd</sup> St to CTH X**  
**IH 39**  
**Portage County**

### Letting of March 10, 2020

This is Addendum No. 01, which provides for the following:

#### Special Provisions:

Revised Special Provisions	
Article No.	Description
36	Base Patching Special, Item SPV.0180.01. - Added rubblizing concrete base patching requirements.

#### Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
11	Construction Detail - Added note to rubblize concrete base patches and option for full depth base patching concrete.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

**ADDENDUM NO. 01**

**1166-00-79**

**February 24, 2020**

**Special Provisions**

**1. Base Patching Special, Item SPV.0180.01.**

**A Description**

This special provision describes patching areas of existing concrete and rubblized concrete pavement with concrete and asphaltic mixes for overlaying with new pavement.

**B Materials**

Furnish materials conforming to standard spec 390.2.

**C Construction**

Construct conforming to standard spec 390.3

*Replace standard spec 390.3.2 (2) with the following:*

- (1) Cure exposed patches as specified for concrete pavement in standard spec 415.3.12. Use wax-based curing compound conforming to standard spec 501.2.9. Protect as specified for concrete pavement in standard spec 415.3.14. Asphaltic patching can be installed over concrete base patching after curing for 24 hours.

Rubblize concrete base patching conforming to standard spec 335.3.2 and 335.3.3.

**D Measurement**

The department will measure Base Patching Special by the SY acceptably completed.

**E Payment**

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0180.01	Base Patching Special	SY

Payment is full compensation for rubblizing concrete base patching, removing old pavement, rubblized pavement and disposing of removed materials; for preparing the foundation; for providing, curing, and protecting concrete; and for providing and compacting asphaltic mixture, including the asphaltic material.

The department will pay separately for sawing concrete, drilled tie bars and drilled dowel bars.

**Plan Sheets**





The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 11.


END OF ADDENDUM

NOTE: COMPLETE BASE PATCHING SPECIAL AND BASE PATCHING ASPHALTIC PRIOR TO PAVING

- ① CONCRETE: 9" ASPHALT: 8½" AT CENTERLINE, 7" AT EDGELINE SB: STA 1510+50 - STA 1604+00 SB: STA 1620+00 - STA 1684+00
- ② CONCRETE: 9½" TO 9" MATCH EXISTING CONCRETE THICKNESS ASPHALT: 5" TO 7" SB: STA 1484+00 - STA 1488+50
- ③ SELECT CRUSHED MATERIAL 5½" TO 9" MATCH EXISTING CONCRETE OR RUBBLIZED CONCRETE THICKNESS ASPHALT: 5" TO 8½" MATCH EXISTING ASPHALT THICKNESS
- ④ IF SPACE BETWEEN CONSECUTIVE PATCHES IS 6' OR LESS, REMOVE CONCRETE OR RUBBLIZED CONCRETE BETWEEN PATCHES
- ⑤ 6' LONG BASE PATCHING SPECIAL UNLESS NOTED OTHERWISE
- ⑥ INCIDENTAL TO BASE PATCHING SPECIAL OR BASE PATCHING ASPHALTIC MAY USE BASE PATCHING CONCRETE IN LIEU OF ASPHALTIC SURFACE

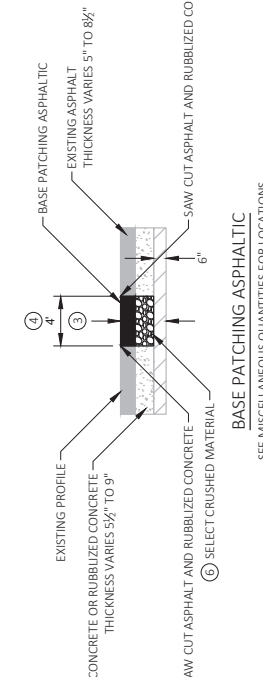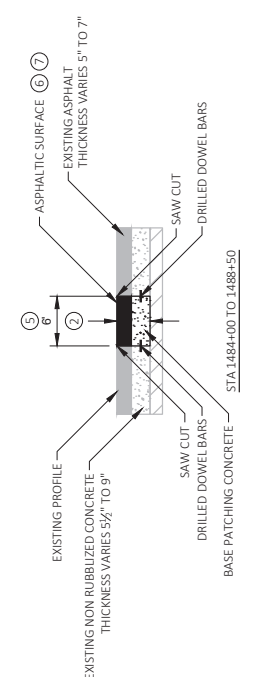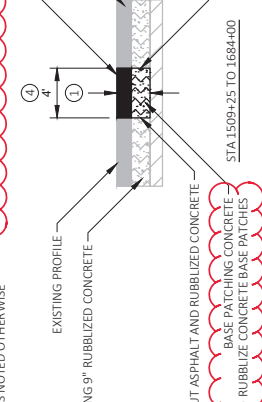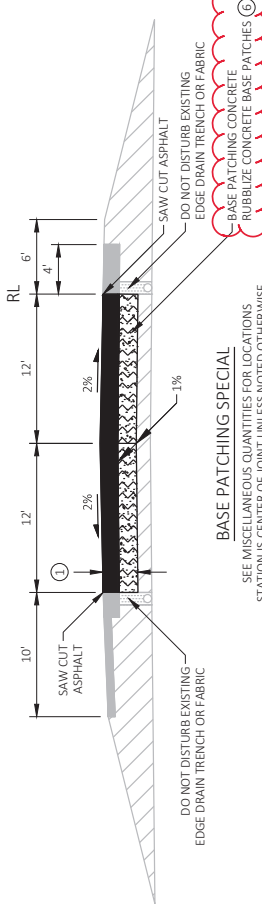

BASE PATCHING SPECIAL OR ASPHALTIC

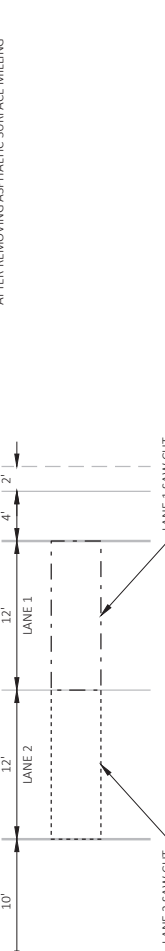

Addendum No. 01  
ID 1166-00-79  
Revised Sheet 11  
February 24, 2020

PROJECT NO: 1166-00-79	HWY: IH 39	COUNTY: PORTAGE	CONSTRUCTION DETAILS	SHEET 11	E
FILE NAME: N:\PDS\3D\11660009\SHETS\PAV02.001-CD.DWG	LAYOUT NAME: -01	FLYBY: GRILING, ZACHARY P	PLOT NAME: 1 IN:10 FT	PLOT SCALE: 1 IN:10 FT	WSS07/CADD/SHEET 42
DATE: 2/17/2020 8:31 AM					

