



# Wisconsin Department of Transportation

May 4, 2021

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #07: 5155-04-81**  
**Oregon - Evansville**  
**STH 138 to STH 92**  
**USH 14**  
**Dane County**

**5155-00-79, WISC 2021302**  
**Madison - Evansville**  
**STH 92 Intersection**  
**USH 14**  
**Dane County**

### Letting of May 11, 2021

This is Addendum No. 01, which provides for the following:

#### Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
15-16	Finished Typical Sections (asphalt layer thicknesses for USH 14 within the roundabout limits changed to two 1¾-inch upper layers and 2½-inch lower layer)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.


Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

END OF ADDENDUM



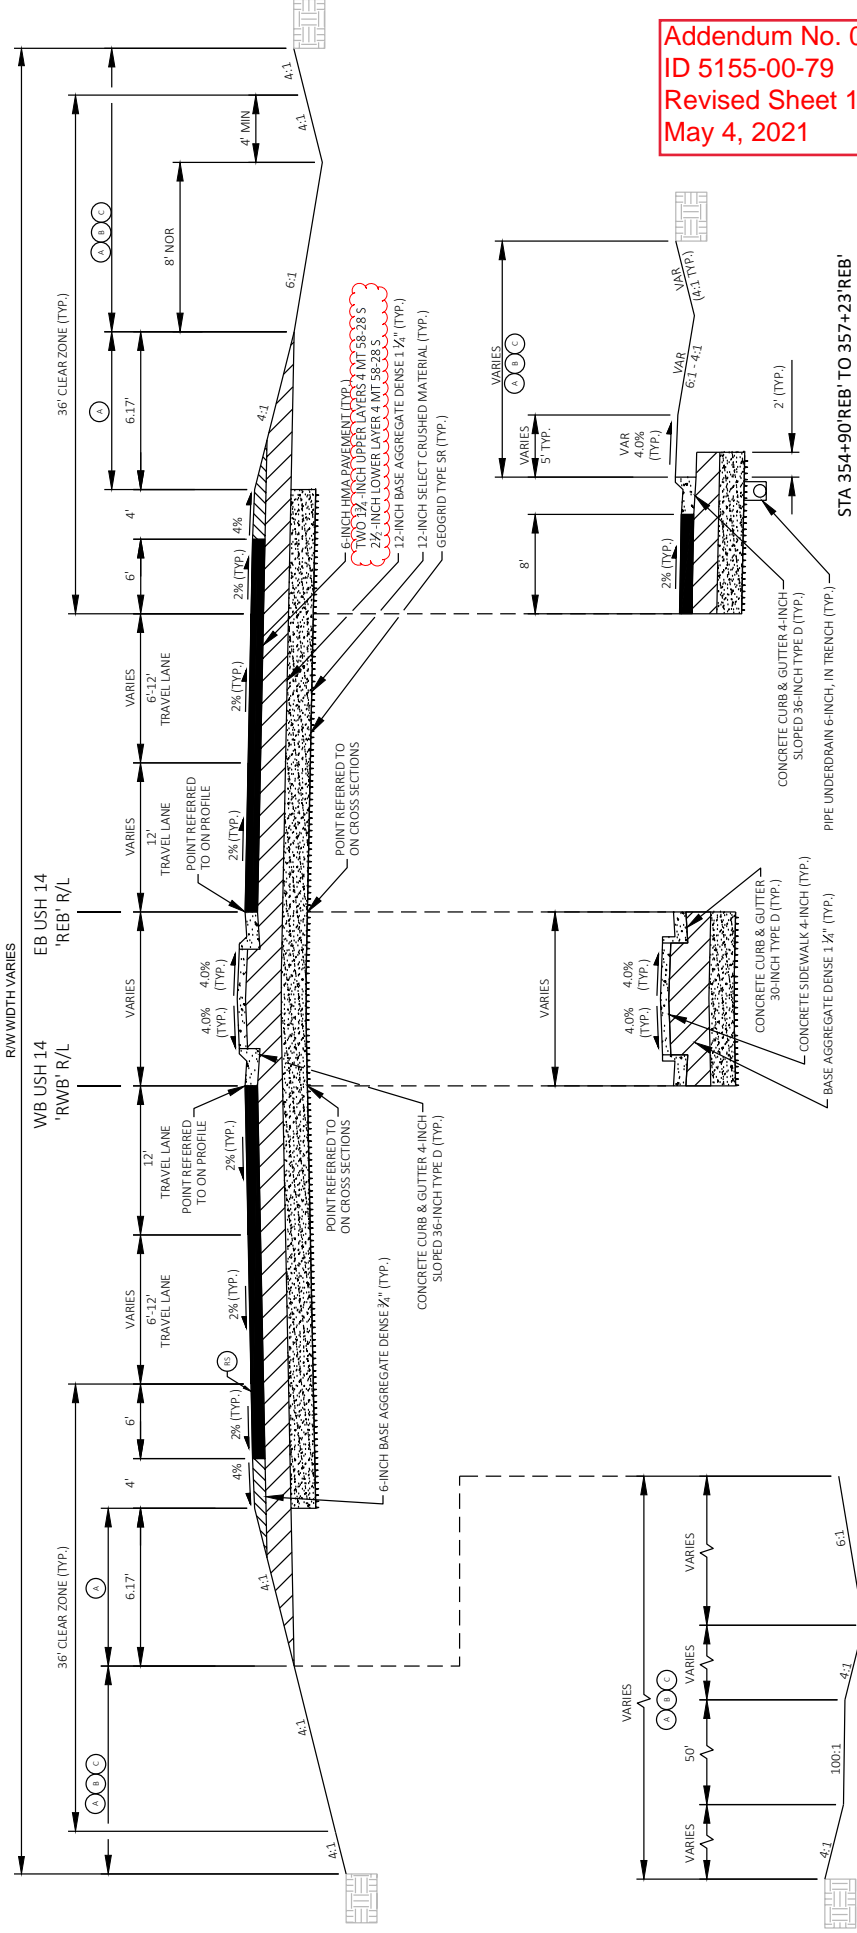

Addendum No. 01  
 ID 5155-00-79  
 Revised Sheet 16  
 May 4, 2021

STA 354+90' RB' TO 358+25' RB'

STA 357+28' RB' TO 358+25' RB'  
 STA 361+75' RB' TO 362+43' RB'

STA 354+90' RB' TO 357+23' RB'

**LEGEND**

- (A) SEED MIXTURE #20 WITH TEMPORARY SEEDING & FERTILIZER TYPE B
- (B) 4" SALVAGED TOPSOIL
- (C) MULCHING OR EROSION MAT (SEE EROSION CONTROL PLANS FOR EROSION MAT TYPE)

TYPICAL FINISHED SECTION USH 14  
 STA 354+90' RB' TO 357+23' RB'  
 STA 354+90' RB' TO 358+25' RB'  
 STA 361+75' RB' TO 364+79' RB'  
 STA 362+52' RB' TO 364+85' RB'

**NOTES**

- SEE STORM SEWER PLANS FOR PIPE UNDERDRAIN LOCATIONS
- FRENCH DRAINS REQUIRED ON RURAL SECTIONS. SEE CONSTRUCTION DETAIL
- ASPHALTIC SHOULDER RUMBLE STRIPS, SKIUSODIAL 2, LANE RURAL  
 STA 354+90' RB' - 358+09' RB', LT

PROJECT NO: 5155-00-79

HWY: USH 14

COUNTY: DANE

FINISHED TYPICAL SECTIONS

SHEET

16

