



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

October 29, 2021

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #18: 4085-33-71, WISC 2022014
Hilbert – Green Bay
South County Line – Duester Street
STH 32
Brown County

Letting of November 9, 2021

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress
4	Traffic

Added Special Provisions	
Article No.	Description
25	Joint Ties for Culvert Pipes, Item SPV.0060.01

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
204.0115	Removing Asphaltic Surface Butt Joints	SY	169	1200	1369
614.2300	MGS Guardrail 3	LF	1726	-150	1576
643.0900	Traffic Control Signs	DAY	1523	100	1623

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
614.2500	MGS Thrie Beam Transition	LF	0	157.6	157.6
SPV.0060.01	Joint Ties for Concrete Pipes	EACH	0	3	3

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
11	Construction Details – Removed butt joint detail for non-milled asphaltic pavements (profile change) and replaced with butt joint detail for milled asphaltic pavements (profile change) and updated the minimum mill depth shown in detail
38	Miscellaneous Quantities – Updated removing asphaltic surface butt joints MQ table
45	Miscellaneous Quantities – Updated beam guard summary table and added joint ties MQ table
49	Miscellaneous Quantities – Updated traffic control summary

Other

Revise the contract completion time is revised from 35 working days to 45 working days.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

4085-33-71

October 29, 2021

Special Provisions

3. Prosecution and Progress.

Replace paragraph four with the following:

The Notice to Proceed will be issued such that work shall start no later than July 15, 2022, unless otherwise approved by the engineer.

4. Traffic.

Replace paragraph seven with the following:

Beam guard repairs need to be completed within 7 calendar days of removing the initial guardrail and/or EAT's.

25. Joint Ties for Culvert Pipes, SPV.0060.01.

A Description

This special provision describes installing joint ties for concrete pipe on existing pipes.

B Materials

Furnish joint ties according to the pertinent requirements of standard spec 522.

C Construction

Excavate and expose the last two joints of the existing pipe to a depth where joint ties for concrete pipe can be installed per details in the plan. Avoid over excavating and undermining the existing pipe. Replace existing pipe to its original location if separation has occurred between pipe segments. Drill holes to insert joint ties if existing holes are not present. Install joint ties for concrete pipe as detailed in the plan. Backfill and compact around pipe according to standard spec 522. Supply granular backfill if engineer deems existing excavated material is unsuitable for backfill. Restore disturbed area using appropriate bid items.

D Measurement

The department will measure Joint Ties for Concrete Pipes as each individual unit, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.01	Joint Ties for Concrete Pipes	EACH

Payment is full compensation for providing; handling; excavating existing pipe; cleaning pipe necessary for joint tie installation; drilling holes if necessary; installing joint ties; providing and installing any necessary granular backfill; and backfilling and compacting around existing pipe.

Schedule of Items

Attached, dated October 29, 2021, are the revised Schedule of Items Pages 1 – 8.


Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 11, 38, 45 and 49


END OF ADDENDUM

Addendum No. 01
 ID 4085-33-71
 Revised Sheet 11
 October 29, 2021

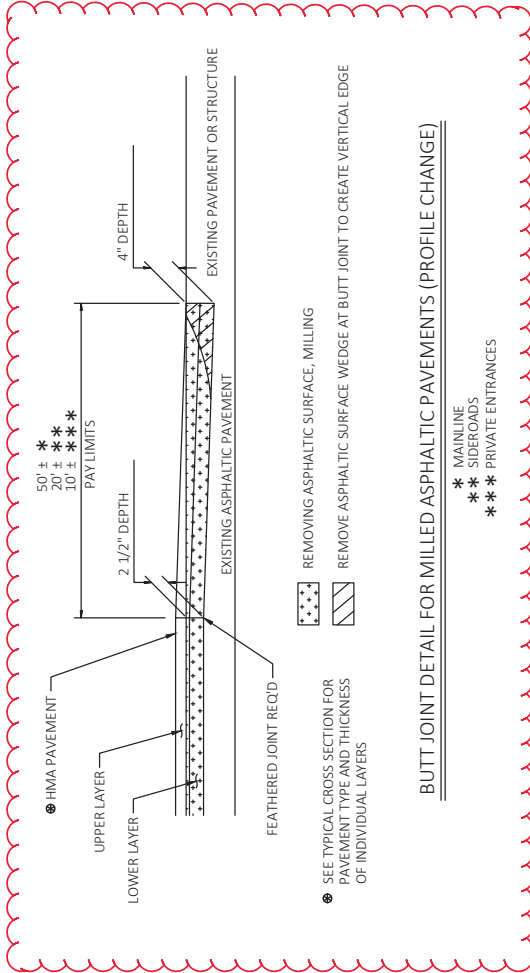


- SEE TYPICAL CROSS SECTION FOR PAVEMENT TYPE AND THICKNESS OF INDIVIDUAL LAYERS
- REMOVING ASPHALTIC SURFACE, MILLING
- REMOVE ASPHALTIC SURFACE WEDGE AT BUTT JOINT TO CREATE VERTICAL EDGE
- * MAINLINE SIDEROADS
- ** PRIVATE ENTRANCES

BUTT JOINT DETAIL FOR MILLED ASPHALTIC PAVEMENTS (PROFILE CHANGE)

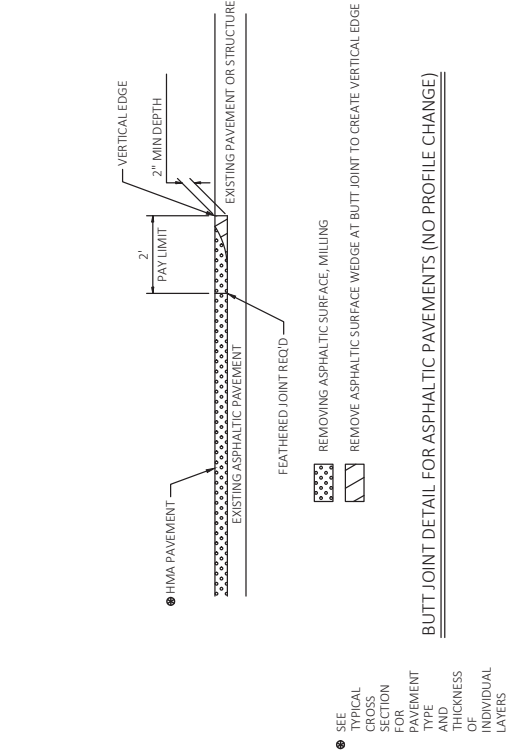


- SEE TYPICAL CROSS SECTION FOR PAVEMENT TYPE AND THICKNESS OF INDIVIDUAL LAYERS
- REMOVING ASPHALTIC SURFACE, MILLING
- REMOVE ASPHALTIC SURFACE WEDGE AT BUTT JOINT TO CREATE VERTICAL EDGE

BUTT JOINT DETAIL FOR ASPHALTIC PAVEMENTS (NO PROFILE CHANGE)

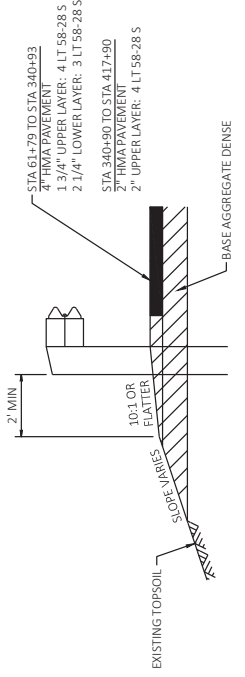

- STA 614+79 TO STA 340+93
 4" HMA PAVEMENT
 1 3/4" UPPER LAYER: 4 LT 58-28 S
 2 1/4" LOWER LAYER: 3 LT 58-28 S
- STA 340+60 TO STA 417+90
 2" HMA PAVEMENT
 2" UPPER LAYER: 4 LT 58-28 S

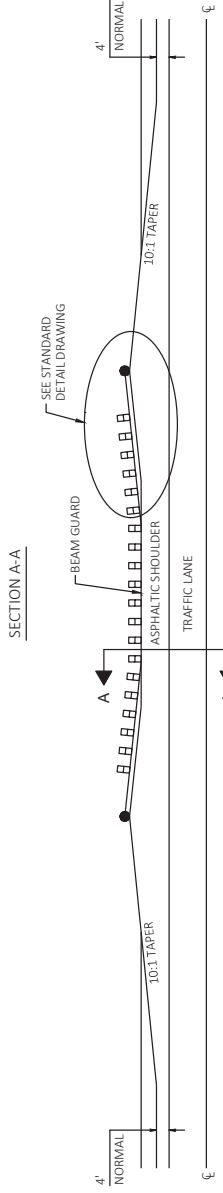

DETAIL FOR ASPHALTIC SHOULDER AT BEAM GUARD

CLEARING & GRUBBING

201.0105		201.0205		REMARKS	
CATEGORY	STATION TO	LOCATION	CLEARING STA	GRUBBING STA	
0010	65+00 -	67+40	STH 32	2.4	2.4
0010	12+15 -	13+70	MAN CAL ROAD	1.6	1.6
			TOTAL 0010	4.0	4.0

REMOVING SMALL CULVERT PIPES

203.0100		REMARKS	
CATEGORY	STATION	LOCATION	REMARKS
0010	14+41	MAN CAL ROAD	1 18-INCH CMP
0010	66+64	STH 32	1 48-INCH RCCP
0010	181+22	STH 32	1 LT, 18-INCH CMP
0010	418+70	STH 32	1 LT, 18-INCH CMP
		TOTAL 0010	4

REMOVING ASPHALTIC SURFACE BUTT JOINTS

204.0115		REMARKS	
CATEGORY	STATION	LOCATION	REMARKS
0010	61+79	STH 32	167
0010	1+00	MAN CAL ROAD	62
0010	17+03	MAN CAL ROAD	62
0010	10+20	LOVERS LANE	116
0010	19+35	WAYSIDE ROAD	98
0010	20+71	WAYSIDE ROAD	78
0010	119+29	CTH Z	78
0010	120+71	CTH Z	73
0010	19+30	LAMERS CLANCY ROAD	84
0010	20+68	LAMERS CLANCY ROAD	78
0010	10+62	ST PATS CHURCH ROAD	78
0010	20+35	CTH IL	107
0010	21+69	MILL ROAD	87
0010	46+68	STH 96	10
0010	51+67	STH 96	8
0010	10+39	FAIR ROAD	9
0010	20+68	FAIR ROAD	8
0010	18+36	OAKVIEW LANE	13
0010	14+72	DEUSTER STREET	7
0010	340+91	STH 32	133
0010	345+44	STH 32	7
0010	417+90	STH 32	8
		TOTAL 0010	1,369

REMOVING ASPHALTIC SURFACE MILLING

204.0120		REMARKS		
CATEGORY	STATION TO	LOCATION	REMARKS	
0010	61+79 -	117+35	STH 32	18520
0010	117+35 -	340+93	STH 32	74387
0010	340+93 -	345+44	STH 32	3822
0010	345+44 -	369+98	STH 32	10907
0010	369+98 -	417+90	STH 32	15973
0010		LOVERS LANE		59
0010		WAYSIDE ROAD		258
0010		WAYSIDE ROAD		256
0010		HILL ROAD		288
0010		CTH Z		264
0010		LAMERS CLANCY ROAD		265
0010		LAMERS CLANCY ROAD		291
0010		ST PATS CHURCH ROAD		241
0010		MILL ROAD		247
0010		CTH IL		335
0010		FAIR ROAD		254
0010		FAIR ROAD		257
0010		OAKVIEW LANE		372
0010		DEUSTER STREET		227
		TOTAL 0010		127,222

Addendum No. 01
 ID 4085-33-71
 Revised Sheet 38
 October 29, 2021

Addendum No. 01
 ID 4085-33-71
 Revised Sheet 45
 October 29, 2021

3

CULVERT PIPE SUMMARY

CATEGORY	STATION	LOCATION	CONCRETE COLLARS FOR PIPE EACH	APRON ENDWALLS FOR CULVERT PIPE STEEL 12-INCH EACH	APRON ENDWALLS FOR CULVERT PIPE STEEL 18-INCH EACH	CULVERT PIPE CORRUGATED STEEL 12-INCH* LF	CULVERT PIPE CORRUGATED STEEL 18-INCH* LF	CULVERT PIPE REINFORCED CONCRETE CLASS III 24-INCH LF	CULVERT PIPE REINFORCED CONCRETE CLASS III 36-INCH LF	CULVERT PIPE REINFORCED CONCRETE CLASS III 48-INCH LF	APRON ENDWALLS FOR CULVERT PIPE REINFORCED CONCRETE 36-INCH EACH	APRON ENDWALLS FOR CULVERT PIPE REINFORCED CONCRETE 48-INCH EACH	522.1048	522.1036	522.1024	522.0148	522.0136	522.1048	633.5200	REMARKS	
0010	13+67	MAN CAL ROAD	-	-	-	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LT-DRIVEWAY CULVERT
0010	14+46	MAN CAL ROAD	-	2	-	-	34	-	-	-	-	-	-	-	-	-	-	-	-	-	2
0010	66+38	STH 32	-	-	-	-	-	-	-	78	-	-	-	-	-	-	-	-	-	-	2
0010	176+39	STH 32	1	-	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	1
0010	176+64	STH 32	1	-	-	-	-	-	10	-	-	-	-	-	-	-	-	-	-	-	1
0010	181+22	STH 32	-	-	2	-	24	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0010	230+95	STH 32	1	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	-	1
0010	230+97	STH 32	1	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	-	1
0010	418+70	STH 32	-	-	2	-	34	-	-	-	-	-	-	-	-	-	-	-	-	-	1
TOTAL 0010			4	2	6	16	92	4	12	78	2	2	2	2	2	2	2	2	2	2	8

*Minimum wall thickness = 0.064"

JOINTIES

SPV.0060.01

SPECIAL (01 JOINTIES FOR CONCRETE PIPES)

CATEGORY	STATION	LOCATION	EACH	REMARKS
0010	364+91	STH32	1	RT
0010	364+91	STH32	2	LT
TOTAL 0010			3	

BEAM GUARD SUMMARY

CATEGORY	STATION	TO	STATION	LOCATION	MGS GUARDRAIL 3 LF	MGS GUARDRAIL 3 K LF	MGS GUARDRAIL 3 L LF	MGS THRIE BEAM TRANSITION LF	MGS GUARDRAIL TERMINAL EAT EACH	SPV.0090.01 SPECIAL (01 RAILING STEEL TYPE 'W' MODIFIED, B-05-262)	REMARKS
0010	78+60	-	86+04	STH 32	637.5	-	-	-	2	-	RT
0010	79+32	-	84+50	STH 32	412.5	-	-	-	2	-	LT
0010	115+51	-	119+20	STH 32	150.0	-	-	78.8	2	40	RT
0010	116+03	-	119+84	STH 32	162.5	-	-	78.8	2	40	LT
0010	329+04	-	334+37	STH 32	-	425	-	-	2	-	LT
0010	416+46	-	420+76	STH 32	213.0	-	112.5	-	2	-	RT
TOTAL 0010					1,576	425	112.5	157.6	12	80	

PROJECT NO: 4085-33-71

HWY: STH 32

COUNTY: BROWN

MISCELLANEOUS QUANTITIES

SHEET: 45

E

FILE NAME : N:\PDS\1\030200_mq.ppk

PLOT DATE : June 14, 1911

PLOT BY : A.R.H.

PLOT NAME :

PLOT SCALE : 1:1

3

ERECTOR & REMOVAL OF PERMANENT SIGNING, TYPE II

SIGN NO.	LOCATION	SIGN CODE	W X H	637.2230 SIGNS TYPE II REFLECTIVE TYPE F S.F.	634.0614 POSTS WOOD 4x6x14	634.0616 POSTS WOOD 4x6x16	638.2102 MOVING SIGNS TYPE II	638.3000 REMOVING SMALL SIGN SUPPORTS EACH
1	COUNTY LINE RD/MAN CAL ROAD	R1-2	---	---	---	1	1	1
2	"	R1-1	---	---	---	1	1	1
3	"	R1-1	---	---	---	1	1	1
4	"	R1-1	---	---	---	1	1	1
5	"	D11-1	---	---	---	1	1	1
6	"	R1-1	---	---	---	1	1	1
7	"	W1-6	48" X 24"	8.00	---	---	---	---
8	"	I2-2	---	---	---	2	---	2
9	"	I2-2	---	---	---	2	---	2
TOTALS				8.00	2.00	9	5	10

TRAFFIC CONTROL SUMMARY

CATEGORY	STATION	TO	STATION	LOCATION	APPROX. SERVICE PERIOD DAY	NO. IN SERVICE	DAY	NO. IN SERVICE	DAY	NO. IN SERVICE	DAY	NO. IN SERVICE	DAY	REMARKS
0010	61+79	-	42+22	STH 32	45	-	-	-	-	-	-	10	450	FLAGGING OPERATIONS
0010	61+79	-	72+35	STH 32	25	50	1250	-	-	10	250	20	500	MAN CAL ROAD REALIGNMENT
0010	174+90	-	185+51	STH 32	5	-	-	-	-	8	200	16	400	MAN CAL ROAD REALIGNMENT
0010	340+93	-	345+44	STH 32	1	50	250	-	-	6	30	12	60	TURN LAMES AT HILL ROAD INTERSECTION
0010	340+93	-	345+44	STH 32	1	-	-	-	-	8	8	16	16	ADVANCED SIGNING DURING DETOUR
0010	340+93	-	345+44	STH 32	5	13	65	4	20	-	-	4	20	STAGE 1 SIDEWALK CLOSURE AT STH 96 ROUNDABOUT
0010	340+93	-	345+44	STH 32	5	10	50	7	35	-	-	5	25	STAGE 2 SIDEWALK CLOSURE AT STH 96 ROUNDABOUT
0010	340+93	-	345+44	STH 32	5	13	65	4	20	-	-	4	20	STAGE 3 SIDEWALK CLOSURE AT STH 96 ROUNDABOUT
0010	340+93	-	345+44	STH 32	5	10	50	4	20	-	-	4	20	STAGE 4 SIDEWALK CLOSURE AT STH 96 ROUNDABOUT
0010	45+94	-	53+96	STH 96	1	-	-	-	-	8	8	16	16	ADVANCED SIGNING DURING DETOUR
0010	418+60	-	422+22	STH 32	19	-	-	-	-	-	-	2	38	LT SHOULDER CLOSURE FOR EXTENSION
UNDISTRIBUTED						433	2163	24	124	248	244	1,271		
TOTAL 0010								119	620	1,240		1,271		

*ADDITIONAL QUANTITIES SHOWN ELSEWHERE

*
643.0900
SIGNS

Addendum No. 01
ID 4085-33-71
Revised Sheet 49
October 29, 2021



Proposal Schedule of Items

Proposal ID: 20211109018 Project(s): 4085-33-71

Federal ID(s): WISC 2022014

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	4.000 STA	_____.	_____.
0004	201.0205 Grubbing	4.000 STA	_____.	_____.
0006	203.0100 Removing Small Pipe Culverts	4.000 EACH	_____.	_____.
0008	203.0220 Removing Structure (structure) 01. STA 419+25	1.000 EACH	_____.	_____.
0010	204.0100 Removing Concrete Pavement	7.000 SY	_____.	_____.
0012	204.0115 Removing Asphaltic Surface Butt Joints	1,369.000 SY	_____.	_____.
0014	204.0120 Removing Asphaltic Surface Milling	127,222.000 SY	_____.	_____.
0016	204.0150 Removing Curb & Gutter	263.000 LF	_____.	_____.
0018	204.0155 Removing Concrete Sidewalk	40.000 SY	_____.	_____.
0020	204.0165 Removing Guardrail	3,241.000 LF	_____.	_____.
0022	204.0185 Removing Masonry	3.000 CY	_____.	_____.
0024	205.0100 Excavation Common	2,345.000 CY	_____.	_____.
0026	206.2000 Excavation for Structures Culverts (structure) 01. C-05-1745	LS	LUMP SUM	_____.
0028	208.0100 Borrow	1,523.000 CY	_____.	_____.
0030	210.2500 Backfill Structure Type B	162.000 TON	_____.	_____.
0032	211.0100 Prepare Foundation for Asphaltic Paving (project) 01. 4085-33-71	LS	LUMP SUM	_____.



Proposal Schedule of Items

Proposal ID: 20211109018 Project(s): 4085-33-71

Federal ID(s): WISC 2022014

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	305.0110 Base Aggregate Dense 3/4-Inch	15,702.000 TON	_____.	_____.
0036	305.0120 Base Aggregate Dense 1 1/4-Inch	3,137.000 TON	_____.	_____.
0038	311.0115 Breaker Run	14.000 CY	_____.	_____.
0040	416.0160 Concrete Driveway 6-Inch	10.000 SY	_____.	_____.
0042	455.0605 Tack Coat	13,743.000 GAL	_____.	_____.
0044	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	2.000 EACH	_____.	_____.
0046	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	2.000 EACH	_____.	_____.
0048	460.2005 Incentive Density PWL HMA Pavement	19,760.000 DOL	1.00000	19,760.00
0050	460.2007 Incentive Density HMA Pavement Longitudinal Joints	25,196.000 DOL	1.00000	25,196.00
0052	460.2010 Incentive Air Voids HMA Pavement	25,610.000 DOL	1.00000	25,610.00
0054	460.5223 HMA Pavement 3 LT 58-28 S	12,853.000 TON	_____.	_____.
0056	460.5224 HMA Pavement 4 LT 58-28 S	12,990.000 TON	_____.	_____.
0058	460.5424 HMA Pavement 4 LT 58-28 H	466.000 TON	_____.	_____.
0060	465.0105 Asphaltic Surface	1,432.000 TON	_____.	_____.
0062	465.0110 Asphaltic Surface Patching	250.000 TON	_____.	_____.
0064	465.0120 Asphaltic Surface Driveways and Field Entrances	30.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20211109018 Project(s): 4085-33-71

Federal ID(s): WISC 2022014

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0066	465.0315 Asphaltic Flumes	54.000 SY	_____.	_____.
0068	465.0475 Asphalt Centerline Rumble Strips 2-Lane Rural	30,681.000 LF	_____.	_____.
0070	502.4205 Adhesive Anchors No. 5 Bar	28.000 EACH	_____.	_____.
0072	504.0100 Concrete Masonry Culverts	21.000 CY	_____.	_____.
0074	505.0400 Bar Steel Reinforcement HS Structures	1,510.000 LB	_____.	_____.
0076	505.0600 Bar Steel Reinforcement HS Coated Structures	1,480.000 LB	_____.	_____.
0078	516.0500 Rubberized Membrane Waterproofing	15.000 SY	_____.	_____.
0080	520.8000 Concrete Collars for Pipe	4.000 EACH	_____.	_____.
0082	521.1012 Apron Endwalls for Culvert Pipe Steel 12-Inch	2.000 EACH	_____.	_____.
0084	521.1018 Apron Endwalls for Culvert Pipe Steel 18-Inch	6.000 EACH	_____.	_____.
0086	521.3112 Culvert Pipe Corrugated Steel 12-Inch	16.000 LF	_____.	_____.
0088	521.3118 Culvert Pipe Corrugated Steel 18-Inch	92.000 LF	_____.	_____.
0090	522.0124 Culvert Pipe Reinforced Concrete Class III 24-Inch	4.000 LF	_____.	_____.
0092	522.0136 Culvert Pipe Reinforced Concrete Class III 36-Inch	12.000 LF	_____.	_____.
0094	522.0148 Culvert Pipe Reinforced Concrete Class III 48-Inch	78.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20211109018 Project(s): 4085-33-71

Federal ID(s): WISC 2022014

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0096	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	2.000 EACH	_____.	_____.
0098	522.1036 Apron Endwalls for Culvert Pipe Reinforced Concrete 36-Inch	2.000 EACH	_____.	_____.
0100	522.1048 Apron Endwalls for Culvert Pipe Reinforced Concrete 48-Inch	2.000 EACH	_____.	_____.
0102	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	313.000 LF	_____.	_____.
0104	602.0405 Concrete Sidewalk 4-Inch	196.000 SF	_____.	_____.
0106	602.0505 Curb Ramp Detectable Warning Field Yellow	80.000 SF	_____.	_____.
0108	603.8000 Concrete Barrier Temporary Precast Delivered	212.500 LF	_____.	_____.
0110	603.8125 Concrete Barrier Temporary Precast Installed	212.500 LF	_____.	_____.
0112	603.8500 Anchoring Concrete Barrier Temporary Precast	212.500 LF	_____.	_____.
0114	606.0300 Riprap Heavy	11.000 CY	_____.	_____.
0116	614.0905 Crash Cushions Temporary	1.000 EACH	_____.	_____.
0118	614.2300 MGS Guardrail 3	1,576.000 LF	_____.	_____.
0120	614.2330 MGS Guardrail 3 K	425.000 LF	_____.	_____.
0122	614.2340 MGS Guardrail 3 L	112.500 LF	_____.	_____.
0124	614.2610 MGS Guardrail Terminal EAT	12.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20211109018 Project(s): 4085-33-71

Federal ID(s): WISC 2022014

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0126	618.0100 Maintenance And Repair of Haul Roads (project) 01. 4085-33-71	1.000 EACH	_____.	_____.
0128	619.1000 Mobilization	1.000 EACH	_____.	_____.
0130	624.0100 Water	144.490 MGAL	_____.	_____.
0132	625.0100 Topsoil	10,763.000 SY	_____.	_____.
0134	628.1504 Silt Fence	4,906.000 LF	_____.	_____.
0136	628.1520 Silt Fence Maintenance	4,906.000 LF	_____.	_____.
0138	628.1905 Mobilizations Erosion Control	6.000 EACH	_____.	_____.
0140	628.1910 Mobilizations Emergency Erosion Control	4.000 EACH	_____.	_____.
0142	628.2004 Erosion Mat Class I Type B	9,129.000 SY	_____.	_____.
0144	628.2008 Erosion Mat Urban Class I Type B	1,634.000 SY	_____.	_____.
0146	628.7555 Culvert Pipe Checks	30.000 EACH	_____.	_____.
0148	629.0210 Fertilizer Type B	6.780 CWT	_____.	_____.
0150	630.0130 Seeding Mixture No. 30	164.300 LB	_____.	_____.
0152	630.0140 Seeding Mixture No. 40	29.400 LB	_____.	_____.
0154	630.0500 Seed Water	241.090 MGAL	_____.	_____.
0156	633.5200 Markers Culvert End	8.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20211109018 Project(s): 4085-33-71

Federal ID(s): WISC 2022014

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0158	634.0614 Posts Wood 4x6-Inch X 14-FT	2.000 EACH	_____.	_____.
0160	634.0616 Posts Wood 4x6-Inch X 16-FT	9.000 EACH	_____.	_____.
0162	637.2230 Signs Type II Reflective F	8.000 SF	_____.	_____.
0164	638.2102 Moving Signs Type II	5.000 EACH	_____.	_____.
0166	638.3000 Removing Small Sign Supports	10.000 EACH	_____.	_____.
0168	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0170	643.0300 Traffic Control Drums	2,163.000 DAY	_____.	_____.
0172	643.0410 Traffic Control Barricades Type II	119.000 DAY	_____.	_____.
0174	643.0420 Traffic Control Barricades Type III	624.000 DAY	_____.	_____.
0176	643.0705 Traffic Control Warning Lights Type A	1,248.000 DAY	_____.	_____.
0178	643.0900 Traffic Control Signs	1,623.000 DAY	_____.	_____.
0180	643.0920 Traffic Control Covering Signs Type II	4.000 EACH	_____.	_____.
0182	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0184	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0186	645.0105 Geotextile Type C	48.000 SY	_____.	_____.
0188	645.0120 Geotextile Type HR	27.000 SY	_____.	_____.
0190	646.1020 Marking Line Epoxy 4-Inch	26,699.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20211109018 Project(s): 4085-33-71
Federal ID(s): WISC 2022014

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Table with 5 columns: Proposal Line Number, Item ID Description, Approximate Quantity and Units, Unit Price, Bid Amount. Rows include items like Marking Line Grooved Wet Ref Epoxy 4-Inch, Marking Dotted Extension Epoxy 18-Inch, etc.



Proposal Schedule of Items

Proposal ID: 20211109018 Project(s): 4085-33-71

Federal ID(s): WISC 2022014

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0222	690.0150 Sawing Asphalt	2,638.000 LF	_____.	_____.
0224	690.0250 Sawing Concrete	208.000 LF	_____.	_____.
0226	715.0502 Incentive Strength Concrete Structures	500.000 DOL	1.00000	500.00
0228	740.0440 Incentive IRI Ride	53,892.000 DOL	1.00000	53,892.00
0230	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,000.000 HRS	5.00000	10,000.00
0232	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	1,320.000 HRS	5.00000	6,600.00
0234	SPV.0035 Special 01. Foundation Backfill	237.000 CY	_____.	_____.
0236	SPV.0090 Special 01. Railing Steel Type 'W' Modified, B-05-262	80.000 LF	_____.	_____.
0238	SPV.0195 Special 01. Traffic Bond Limestone 3/8-Inch	20.000 TON	_____.	_____.
0240	614.2500 MGS Thrie Beam Transition	157.600 LF	_____.	_____.
0242	SPV.0060 Special 01. Joint Ties for Culvert Pipes	3.000 EACH	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.