

WIS

APRIL 2022

ORDER OF SHEETS

Section No.	1	Title
Section No.	2	Typical Sections and Details
Section No.	3	Estimate of Quantities
Section No.	3	Miscellaneous Quantities
Section No.	4	Right of Way Plat
Section No.	5	Plan and Profile
Section No.	6	Standard Detail Drawings
Section No.	7	Sign Plates
Section No.	8	Structure Plans
Section No.	9	Computer Earthwork Data
Section No.	9	Cross Sections

TOTAL SHEETS = 108



PROJECT LOCATION

DESIGN DESIGNATION ID 7020-00-01

A.A.D.T.	2022	=	1700
A.A.D.T.	2042	=	2200
D.H.V.		=	255
D.D.		=	60/40
T _s		=	33.5%
DESIGN SPEED		=	55 MPH
ESALS		=	1,600,000

CONVENTIONAL SYMBOLS

PLAN	
CORPORATE LIMITS	
PROPERTY LINE	
LOT LINE	
LIMITED HIGHWAY EASEMENT	
EXISTING RIGHT OF WAY	
PROPOSED OR NEW R/W LINE	
SLOPE INTERCEPT	
REFERENCE LINE	
EXISTING CULVERT	
PROPOSED CULVERT (Box or Pipe)	
COMBUSTIBLE FLUIDS	
MARSH AREA	
WOODED OR SHRUB AREA	

PROFILE	
GRADE LINE	
ORIGINAL GROUND	
MARSH OR ROCK PROFILE (To be noted as such)	
SPECIAL DITCH	
GRADE ELEVATION	
CULVERT (Profile View)	
UTILITIES	
ELECTRIC	
FIBER OPTIC	
GAS	
SANITARY SEWER	
STORM SEWER	
TELEPHONE	
WATER	
UTILITY PEDESTAL	
POWER POLE	
TELEPHONE POLE	

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION

PLAN OF PROPOSED IMPROVEMENT


WYEVILLE - BABCOCK

JUNEAU COUNTY LINE - STH 80

STH 173

WOOD COUNTY

STATE PROJECT NUMBER
7020-00-71



END PROJECT
STA 1504+58.12
X= 650,576.50
Y= 416,896.18

BEGIN PROJECT
STA 1285+11.00
X= 636,281.76
Y= 400,242.80

LAYOUT
SCALE 0 1 MI

TOTAL NET LENGTH OF CENTERLINE = 4.157

HORIZONTAL POSITIONS SHOWN ON THIS PLAN ARE WISCONSIN COORDINATE REFERENCE SYSTEM (WISCRS), WOOD NAD83 (2011), IN U.S. SURVEY FEET. POSITIONS SHOWN ARE GRID COORDINATES, GRID BEARINGS, AND GRID DISTANCES. GRID DISTANCES ARE THE SAME AS GROUND DISTANCES. ELEVATIONS ARE REFERENCED TO NAVD 88 (2012). GPS DERIVED ELEVATIONS ARE BASED ON GEOID 12A.

STATE PROJECT	FEDERAL PROJECT	
	PROJECT	CONTRACT
7020-00-71	WISC 2022307	1

ORIGINAL PLANS PREPARED BY
CONSULTANT FIRM NAME
MSA
1230 South Boulevard, Baraboo, WI 53913
608-356-2771 1-800-362-4505

WISCONSIN
BOBBI L. MAXWELL
39012-006
BARABOO
WI
PROFESSIONAL ENGINEER
Bobbi Maxwell
11-8-21

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

PREPARED BY	
Surveyor	MSA PROFESSIONAL SERVICES
Designer	MSA PROFESSIONAL SERVICES
Project Manager	JEFF STEWART, PE
Regional Examiner	ZACH GRULING, PE
Regional Supervisor	MICHAEL KRETSCHMER, PE

APPROVED FOR THE DEPARTMENT
DATE: 11/9/21

E

PROJECT ID: 7020-00-71
WITH: N/A

27

COUNTY: WOOD

GENERAL NOTES

MISCELLANEOUS

THE LOCATIONS OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS ARE APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN.

ADJUST CULVERT PIPE ELEVATIONS, LENGTHS AND LOCATIONS TO FIT EXISTING FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

ALL EXISTING SIGNS SHALL REMAIN IN PLACE UNTIL CONSTRUCTION OPERATIONS REQUIRE THEM TO BE REMOVED/MOVED OR UNLESS THE ENGINEER APPROVES THEM TO BE REMOVED/MOVED.

WHEN THE QUANTITY OF BASE AGGREGATE OR ASPHALTIC SURFACE IS MEASURED FOR PAYMENT BY THE TON, THE DEPTH OF THICKNESS OF THE LAYER SHOWN ON THE PLANS IS APPROXIMATE AND THE ACTUAL THICKNESS WILL DEPEND ON THE DISTRIBUTION OF THE MATERIAL AS DIRECTED BY THE ENGINEER.

RIGHT OF WAY LOCATIONS ARE APPROXIMATE.

REMOVALS

NO TREES OR SHRUBS ARE TO BE REMOVED WITHOUT APPROVAL OF THE ENGINEER.

GRADING AND EROSION CONTROL

THE LOCATIONS OF EXISTING WETLAND LOCATIONS AS SHOWN ON THE PLANS ARE APPROXIMATE AND THERE MAY BE OTHER WETLANDS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN.

DO NOT STORE EQUIPMENT OR MATERIALS IN, NOR IMPACT ANY WETLANDS OR WATERWAYS OUTSIDE THE SLOPE INTERCEPTS SHOWN.

DISTURBED AREAS WITHIN THE RIGHT-OF-WAY ARE TO BE FERTILIZED, PERMANENT SEEDED, TEMPORARILY SEEDED AND MULCHED OR EMAT PLACED AS DIRECTED BY THE ENGINEER.

THE EROSION CONTROL ITEMS SHOWN ON THE PLANS ARE AT SUGGESTED LOCATIONS. THE ENGINEER WILL DETERMINE THE EXACT LOCATION OF EROSION CONTROL ITEMS. ALL EROSION CONTROL MEASURES SHALL BE MAINTAINED UNTIL SUCH TIME AS THE ENGINEER DETERMINES THE MEASURE IS NO LONGER NECESSARY. REMOVE ITEMS AT ENGINEER'S DIRECTION.

AS-BUILTS

7020-11-63 MONROE COUNTY LINE - STH 80; STH 173, WOOD AND JUNEAU COUNTIES, 1994
7023-1-71 MONROE COUNTY LINE - STH 80; STH 173, WOOD AND JUNEAU COUNTIES, 1980

UTILITIES

ELECTRIC:
DAIRYLAND POWER COOPERATIVE
ATTN: MIKE LYDON
3200 EAST AVE. S.
PO BOX 817
LA CROSSE, WI 54602-0817
PHONE: 608-787-1381
EMAIL: MICHAEL.LYDON@DAIRYLANDPOWER.COM

ELECTRIC:
OAKDALE ELECTRIC COOPERATIVE
ATTN: TRAVIS CHAMPLIN
PO BOX 40
OAKDALE, WI 54649-0040
PHONE: 608-372-8848
MOBILE: 608-343-3400
EMAIL: TRAVISC@OAKDALEREC.COM

FIBER:
TDS TELECOM
ATTN: JEFF SHAW
202 E OGDEN STREET
MEDFORD, WI 54451
OFFICE: 715-748-6970
MOBILE: 715-323-8464
EMAIL: JEFF.SHAW@TDSTELECOM.COM



Dial 811 or (800)242-8511

www.DiggersHotline.com

SECTION 2 ORDER OF SHEETS

1. GENERAL NOTES
2. PROJECT OVERVIEW
3. EXISTING TYPICAL SECTIONS
4. FINISHED TYPICAL SECTIONS
5. CONSTRUCTION DETAILS
6. EROSION CONTROL
7. TRAFFIC CONTROL

ROAD CORING LOG

CORE #	STATION	OFFSET	ASPHALT THICKNESS
C-01	1288+14	8.6' RT	5.625"
C-02	1298+22	5.0' LT	6"
C-03	1308+95	6.0' LT	5.75"
C-04	1318+15	5.7' LT	6.25"
C-05	1328+24	7.2' RT	5.625"
C-06	1337+88	6.2' LT	5.25"
C-07	1347+34	7.1' RT	5.875"
C-08	1357+64	2.0' LT	6"
C-09	1367+91	4.5' RT	5.5"
C-10	1377+27	4.0' LT	5"
C-11	1387+76	8.5' RT	6"
C-12	1397+49	3.6' LT	5.25"
C-13	1405+67	5.6' RT	7.5"
C-14	1415+53	1.4' LT	5.75"
C-15	1426+76	10.3' RT	6.75"
C-16	1436+32	1.8' LT	6.375"
C-17	1445+27	9.9' RT	6.25"
C-18	1456+00	1.9' LT	5.375"
C-19	1466+48	7.2' RT	5.25"
C-20	1475+60	2.9' LT	4.875"
C-21	1485+99	5.5' RT	4.875"
C-22	1495+52	5.6' LT	5"
C-23	1504+33	7.8' RT	3.125"
B1	1291+57	5.8' LT	18.25"
B2	1291+72	5.3' RT	5.75"
B3	1291+99	5.9' LT	9.25"


RUNOFF COEFFICIENT TABLE

	HYDROLOGIC SOIL GROUP											
	A			B			C			D		
	SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)		
LAND USE:	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER
ROW CROPS	.08	.16	.22	.12	.20	.27	.15	.24	.33	.19	.28	.38
	.22	.30	.38	.26	.34	.44	.30	.37	.50	.34	.41	.56
MEDIAN STRIP-TURF	.19	.20	.24	.19	.22	.26	.20	.23	.30	.20	.25	.30
	.24	.26	.30	.25	.28	.33	.26	.30	.37	.27	.32	.40
SIDE SLOPE-TURF			.25			.27			.28			.30
			.32			.34			.36			.38
PAVEMENT:												
ASPHALT	.70 - .95											
CONCRETE	.80 - .95											
BRICK	.70 - .80											
DRIVES, WALKS	.75 - .85											
ROOFS	.75 - .95											
GRAVEL ROADS, SHOULDERS	.40 - .60											


TOTAL PROJECT AREA = 50.97 ACRES
TOTAL AREA EXPECTED TO BE DISTURBED BY CONSTRUCTION ACTIVITIES = 0.14 ACRES


DNR LIAISON

WISCONSIN DEPARTMENT OF NATURAL RESOURCES
ATTN: BRAD BETTHAUSER
ENVIRONMENTAL ANALYSIS & REVIEW SPECIALIST
NORTH CENTRAL REGION
910 STATE HIGHWAY 54
BLACK RIVER FALLS, WI 54615
MOBILE: 715-213-9064
EMAIL: BRADLEY.BETTHAUSER@WISCONSIN.GOV

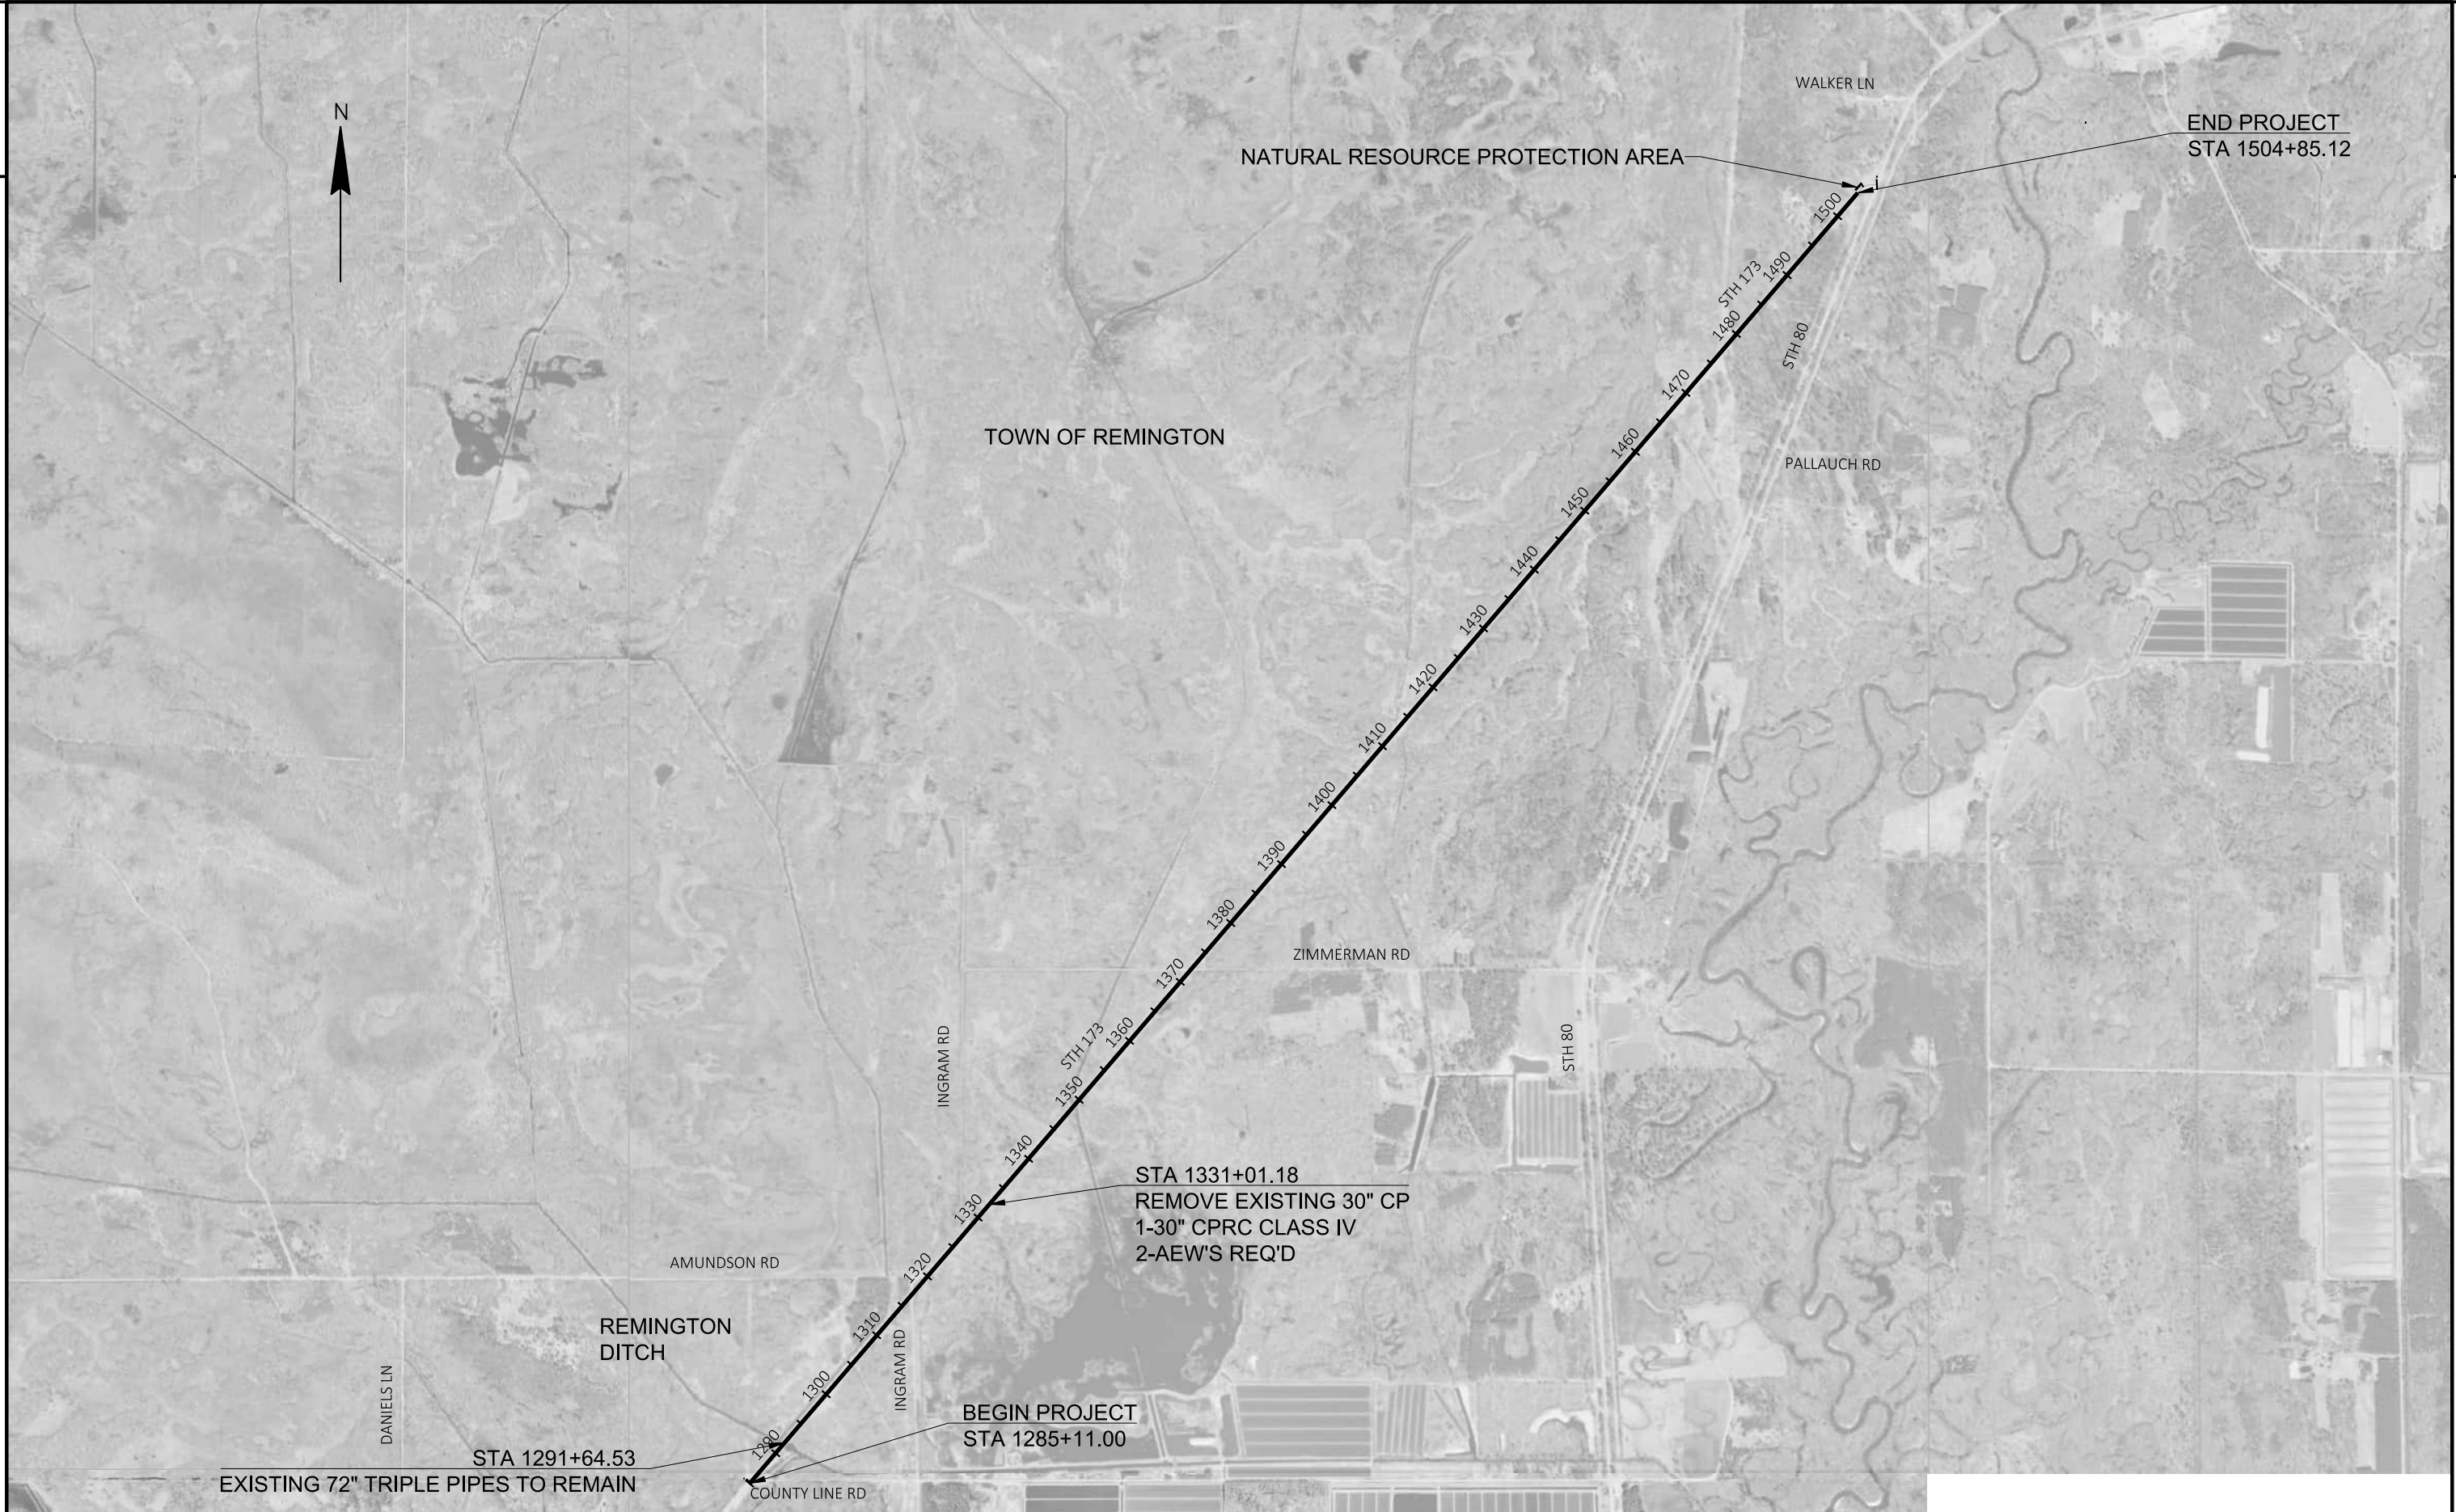

PROJECT NO: 7020-00-71	HWY: STH 173	COUNTY: WOOD	PROJECT OVERVIEW	SHEET	E
------------------------	--------------	--------------	------------------	-------	----------

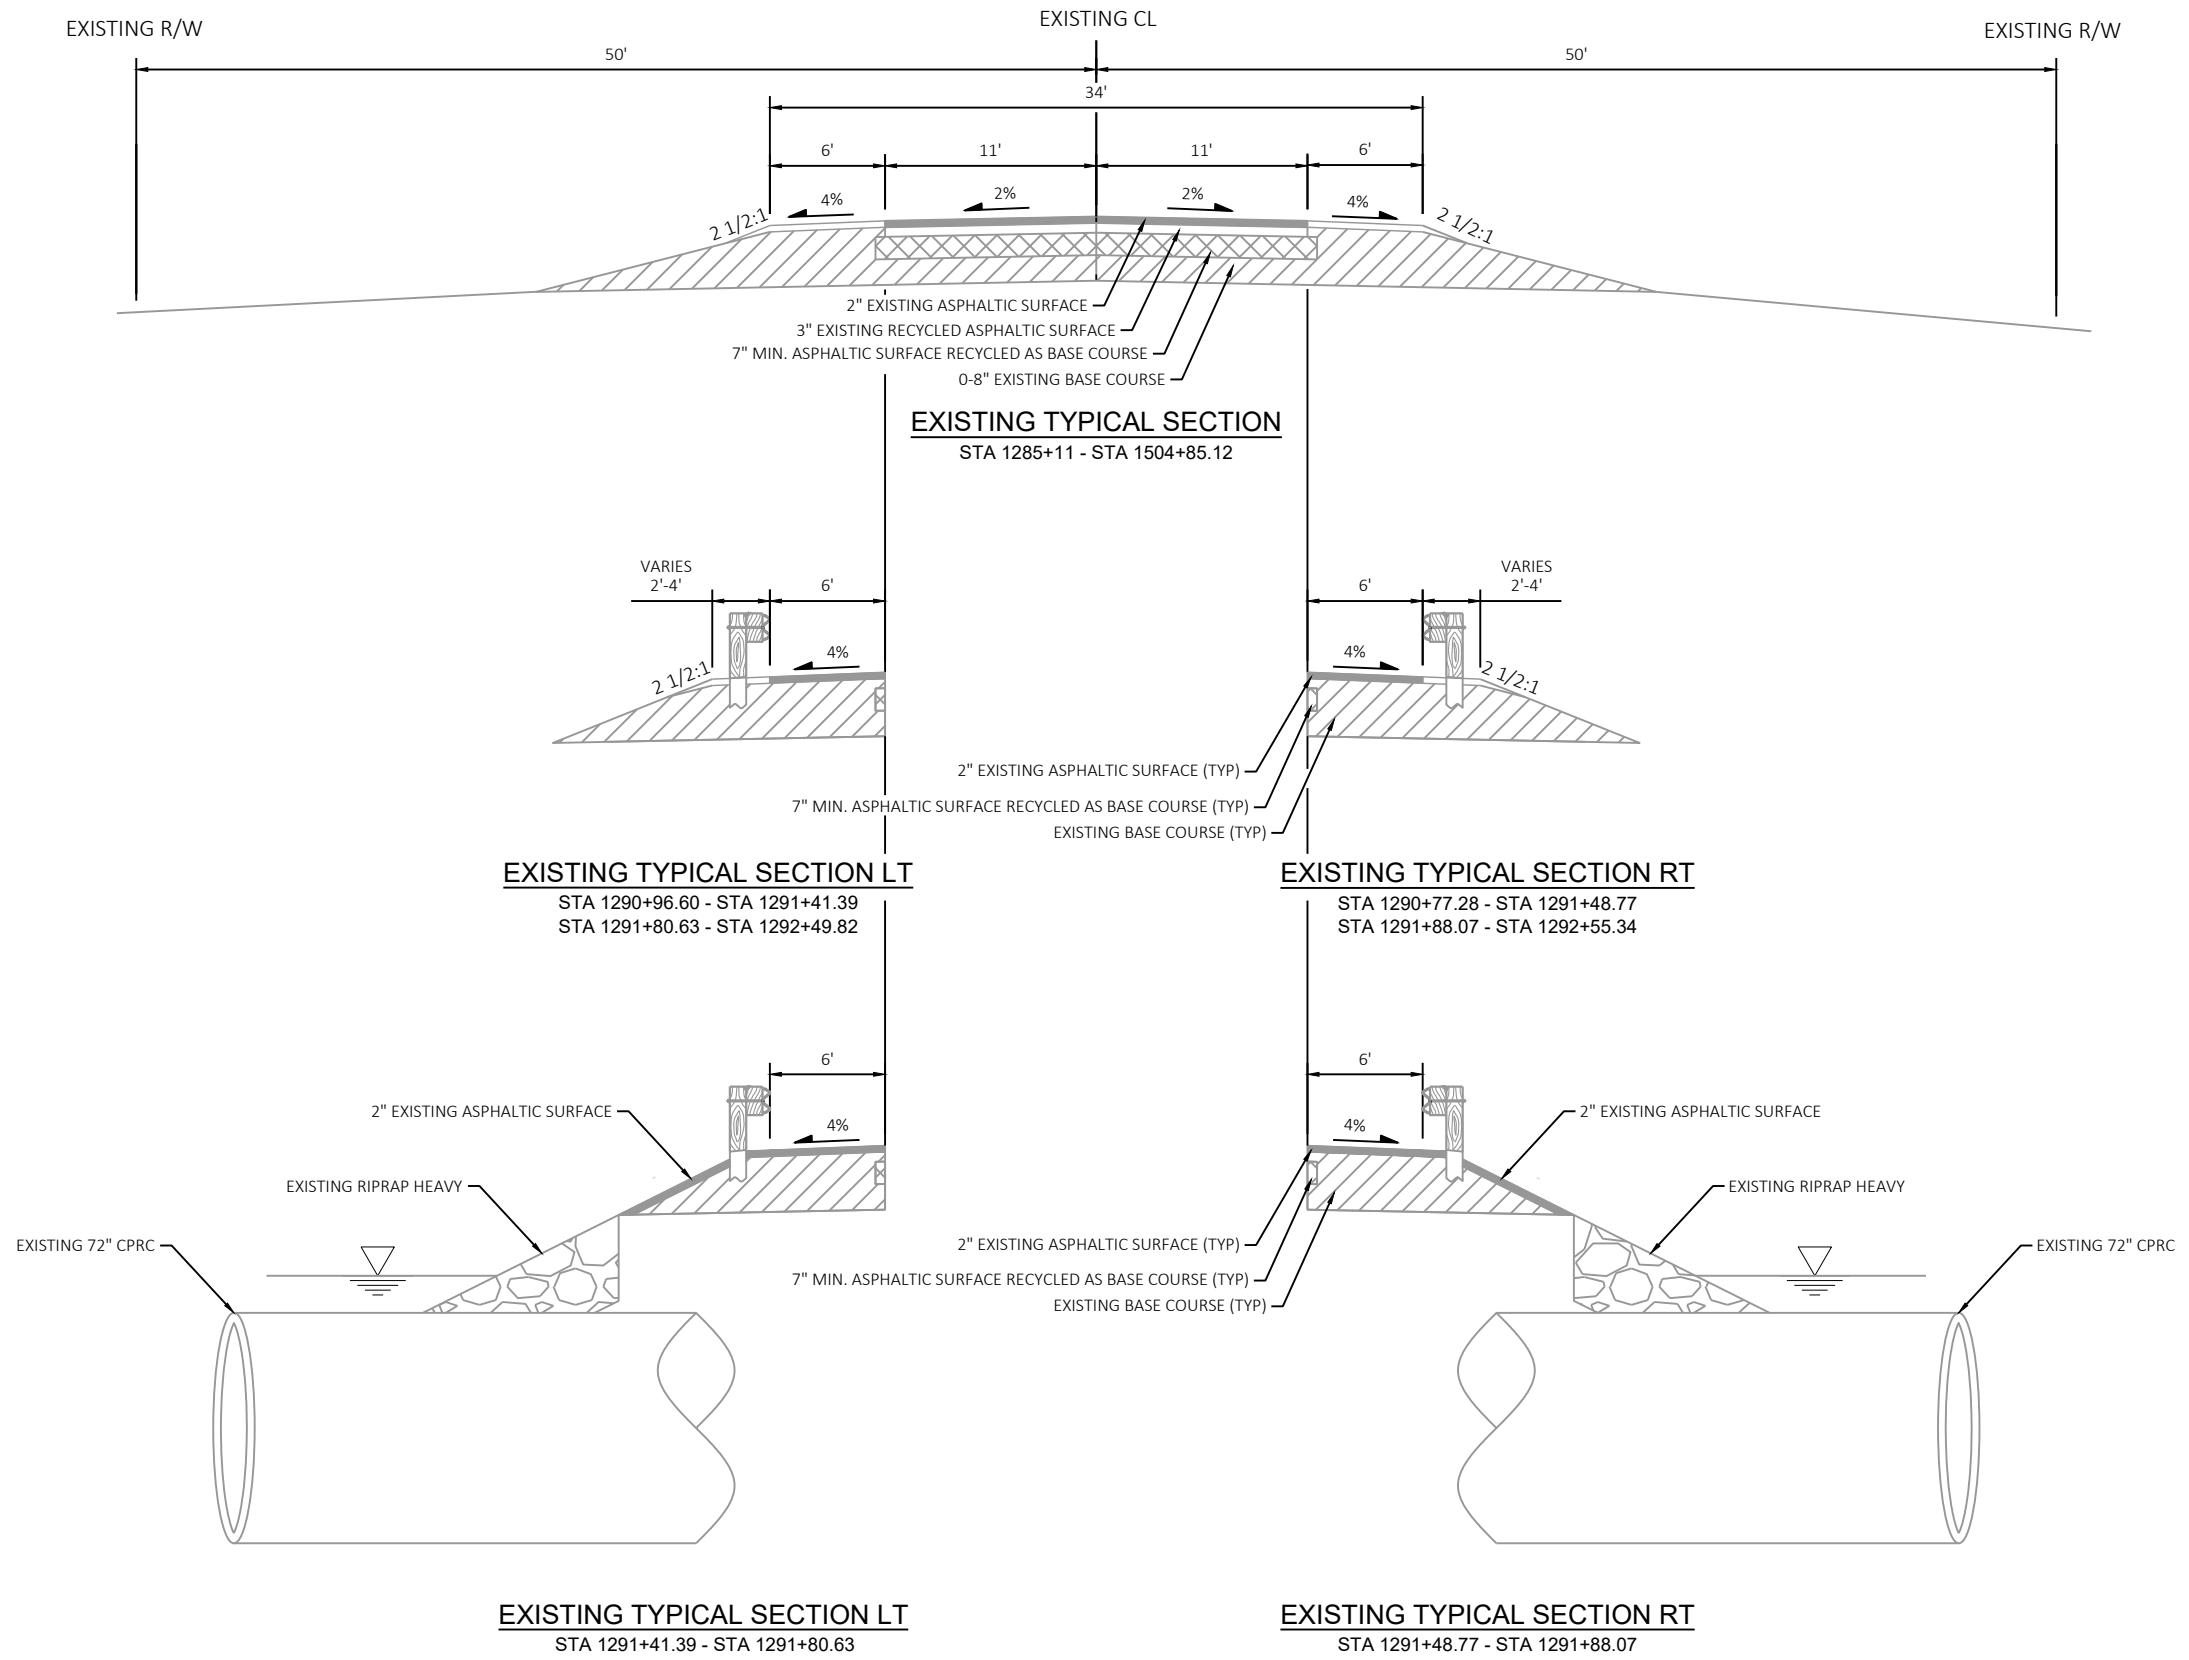




FINISHED TYPICAL SECTION WITH GUARDRAIL

STA 1290+98.00 - STA 1291+04.87 LT
STA 1292+24.19 - STA 1293+22.00 LT


FINISHED TYPICAL SECTION WITH GUARDRAIL

STA 1290+08.00 - STA 1291+04.87 RT
STA 1292+24.19 - STA 1293+01.75 RT



LEGEND

RS ASPHALTIC CENTERLINE RUMBLE STRIP 2-LANE RURAL




FINISHED TYPICAL SECTION OVER CULVERT PIPE

STA 1330+49.00 - STA 1331+54.00

LEGEND

RS ASPHALTIC CENTERLINE RUMBLE STRIP 2-LANE RURAL



TRANSITION CUT DEPTH (T) = THE LESSER OF DEPTH TO CENTER OF PIPE OR 5 FT.
DO NOT EXTEND TRANSITION CUT BELOW HORIZONTAL CENTER OF PIPE.

DEPTH D < 6 FT

STA 1331+01


KEY	
	FINISHED SURFACE
	FINISHED BASE
	TRENCH OR FOUNDATION BACKFILL
	FOUNDATION BACKFILL
	TRANSITION CUT

CULVERT PIPE TRANSITION

ROUTE	STA (CL)	DEPTH D (FT)	PIPE DIA (IN)	TRANSITION CUT DEPTH T (FT)	REMARKS
STH 173	1331+01	0	30	1.25'	C 711730020

NOTES


TRANSITION CUT IS PAID AS EXCAVATION COMMON.
TRANSITION CUT WIDTH IS FROM SUBGRADE SHOULDER POINT TO SUBGRADE SHOULDER POINT.
BACKFILL THE TRANSITION CUT AREAS WITH FOUNDATION AND TRENCH BACKFILL AS SPECIFIED IN STANDARD SPEC 520.
PERFORM CULVERT PIPE INSTALLATION BEFORE MILLING AND PAVING.
PLACE 465.0105 AFTER CULVERT PIPE INSTALLATION AND BEFORE THE MILLING AND PAVING.



BUTT JOINT DETAIL


STA 1285+11 - STA 1285+61
STA 1504+08.12 - STA 1504+58.12

SAWING IS INCIDENTAL TO "REMOVING ASPHALTIC SURFACE BUTT JOINTS"



RIPRAP BEHIND GUARDRAIL

STA 1291+33 - STA 1291+79 LT
 STA 1291+47 - STA 1291+96 RT




PLAN VIEW

GENERAL NOTES:

SILT FENCE POSTS FOR THE TURN-AROUND SHALL BE ON THE OUTSIDE OF THE TURN-AROUND AND TRENCHED IN ACCORDING TO SILT FENCE REQUIREMENTS.

TEMPORARY SMALL ANIMAL TURN-AROUND




TOP VIEW


SECTION A-A

ROCK BAGS USED FOR SILT FENCE RELIEF OVER CULVERTS


STA 1331+01 LT & RT



MUSKRAT BARRIER TRENCH DETAIL




PLAN VIEW




ELEVATION VIEW

ASPHALTIC DRIVEWAY DETAIL

* EXACT DIMENSIONS TO BE DETERMINED BY ENGINEER IN THE FIELD




PLAN VIEW



ELEVATION VIEW


BASE AGGREGATE DRIVEWAY & SIDE ROAD DETAIL



* EXACT DIMENSIONS TO BE DETERMINED BY ENGINEER IN THE FIELD



SIDE ROAD DETAIL

(PAID FOR AS "REMOVING ASPHALTIC SURFACE BUTT JOINTS")
SAWING IS INCIDENTAL TO "REMOVING ASPHALTIC SURFACE BUTT JOINTS"





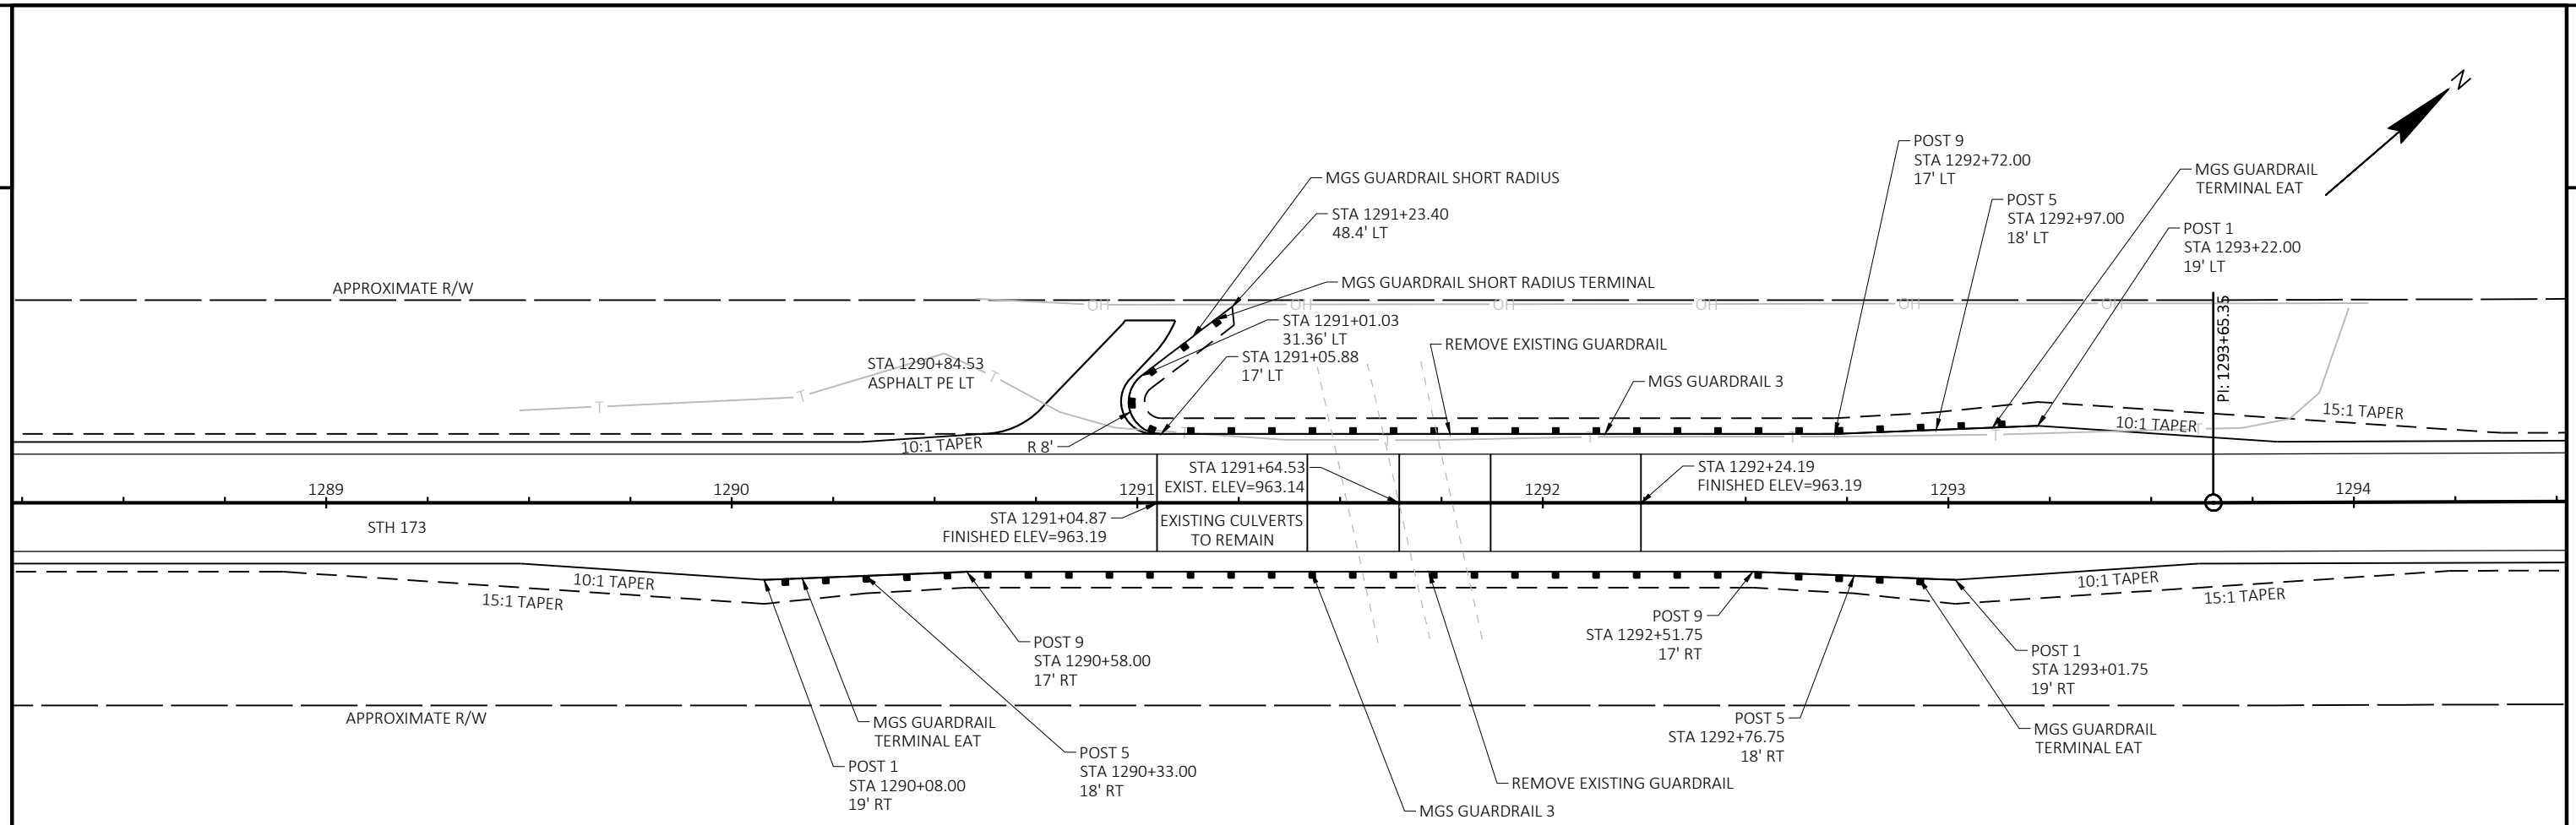

- INSTALL BACKFILL SLURRY AT THE TRIPLE PIPE LOCATION IF SIGNIFICANT VOIDS ARE FOUND THAT APPEAR TO FOLLOW DOWN THE PIPE JOINTS.
- WRAP FABRIC AROUND THE JOINTS AS MUCH AS POSSIBLE FOR ANY EXPOSED JOINTS. SEE SPV ITEM FOR SEALING TOP OF PIPE.
- WRAP FABRIC 3' WIDE CENTERED ON JOINT



NOTES:
 SEE SDD "MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL"
 SEE SDD "MIDWEST GUARDRAIL SYSTEM (MGS) TERMINAL"
 SEE SDD "SHORT RADIUS MGS"

NOTES:
 STAGE TURBIDITY BARRIER AT THE TRIPLE PIPE AREA TO ONLY WORK ON TWO PIPES AT A TIME. THEN SWITCH TO STAGE 2 TO FINISH THE THIRD PIPE.



LEGEND

- EROSION MAT CLASS I TYPE B URBAN
- SILT FENCE
- RIP RAP HEAVY
- SLOPE INTERCEPT
- TURBIDITY BARRIER
- CULVERT PIPE DITCH CHECK
- SURFACE WATER FLOW
- ROCK BAGS USED FOR SILT FENCE RELIEF




TRAFFIC CONTROL SIGNING GENERAL NOTES

1. DRAWINGS SHOW TRAFFIC CONTROL DETOUR FOR A TYPICAL SITUATION. ADDITIONAL TRAFFIC CONTROL DEVICES MAY BE REQUIRED AND/OR LAYOUT DETAILS MODIFIED DEPENDING ON SITE CONDITIONS AS DIRECTED BY THE ENGINEER. ALL CHANGES TO THE TRAFFIC CONTROL DETOUR PLAN SHALL BE REVIEWED WITH THE PROJECT ENGINEER.
2. SIGN FACE LAYOUTS SHALL BE IN ACCORDANCE WITH THE FEDERAL HIGHWAY ADMINISTRATION MANUAL OF STANDARD HIGHWAY SIGNS, UNLESS OTHERWISE NOTED.
3. TRAFFIC CONTROL PLANS ARE NOT TO SCALE.
4. "WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THAT THE BACKGROUND IS ORANGE.
5. ALL SIGNS ARE 48"X48" UNLESS OTHERWISE NOTED.
6. COVER, REMOVE, OR ALTER ANY EXISTING SIGNS THAT DISPLAY A CONFLICTING MESSAGE WITH THE PROPOSED DETOUR ROUTE.
7. MAINTAIN ACCESS TO DRIVEWAYS AND DEAD END SIDE ROADS AT ALL TIMES.

NOTE:

- * UTILIZE S.D.D. "BARRICADES & SIGNS FOR MAINLINE CLOSURES" AT PROJECT ENDS.
- ** UTILIZE S.D.D. "BARRICADES & SIGNS FOR SIDEROAD CLOSURES" AT SIDEROADS WITHIN THE PROJECT LIMITS.



TO BE PLACED 7 DAYS PRIOR TO CONSTRUCTION AND REMOVED WHEN CONSTRUCTION BEGINS

HWY 173 ROAD CLOSED BEGINS XXX-XX


G20-57C
72"X36"
38

DETOUR ROUTE

DETOUR ROUTE
 STH 80 - STH 21 = 36 MILES
 (BABCOCK - WYEVILLE)


LEGEND

■ SIGN ON PERMANENT SUPPORT

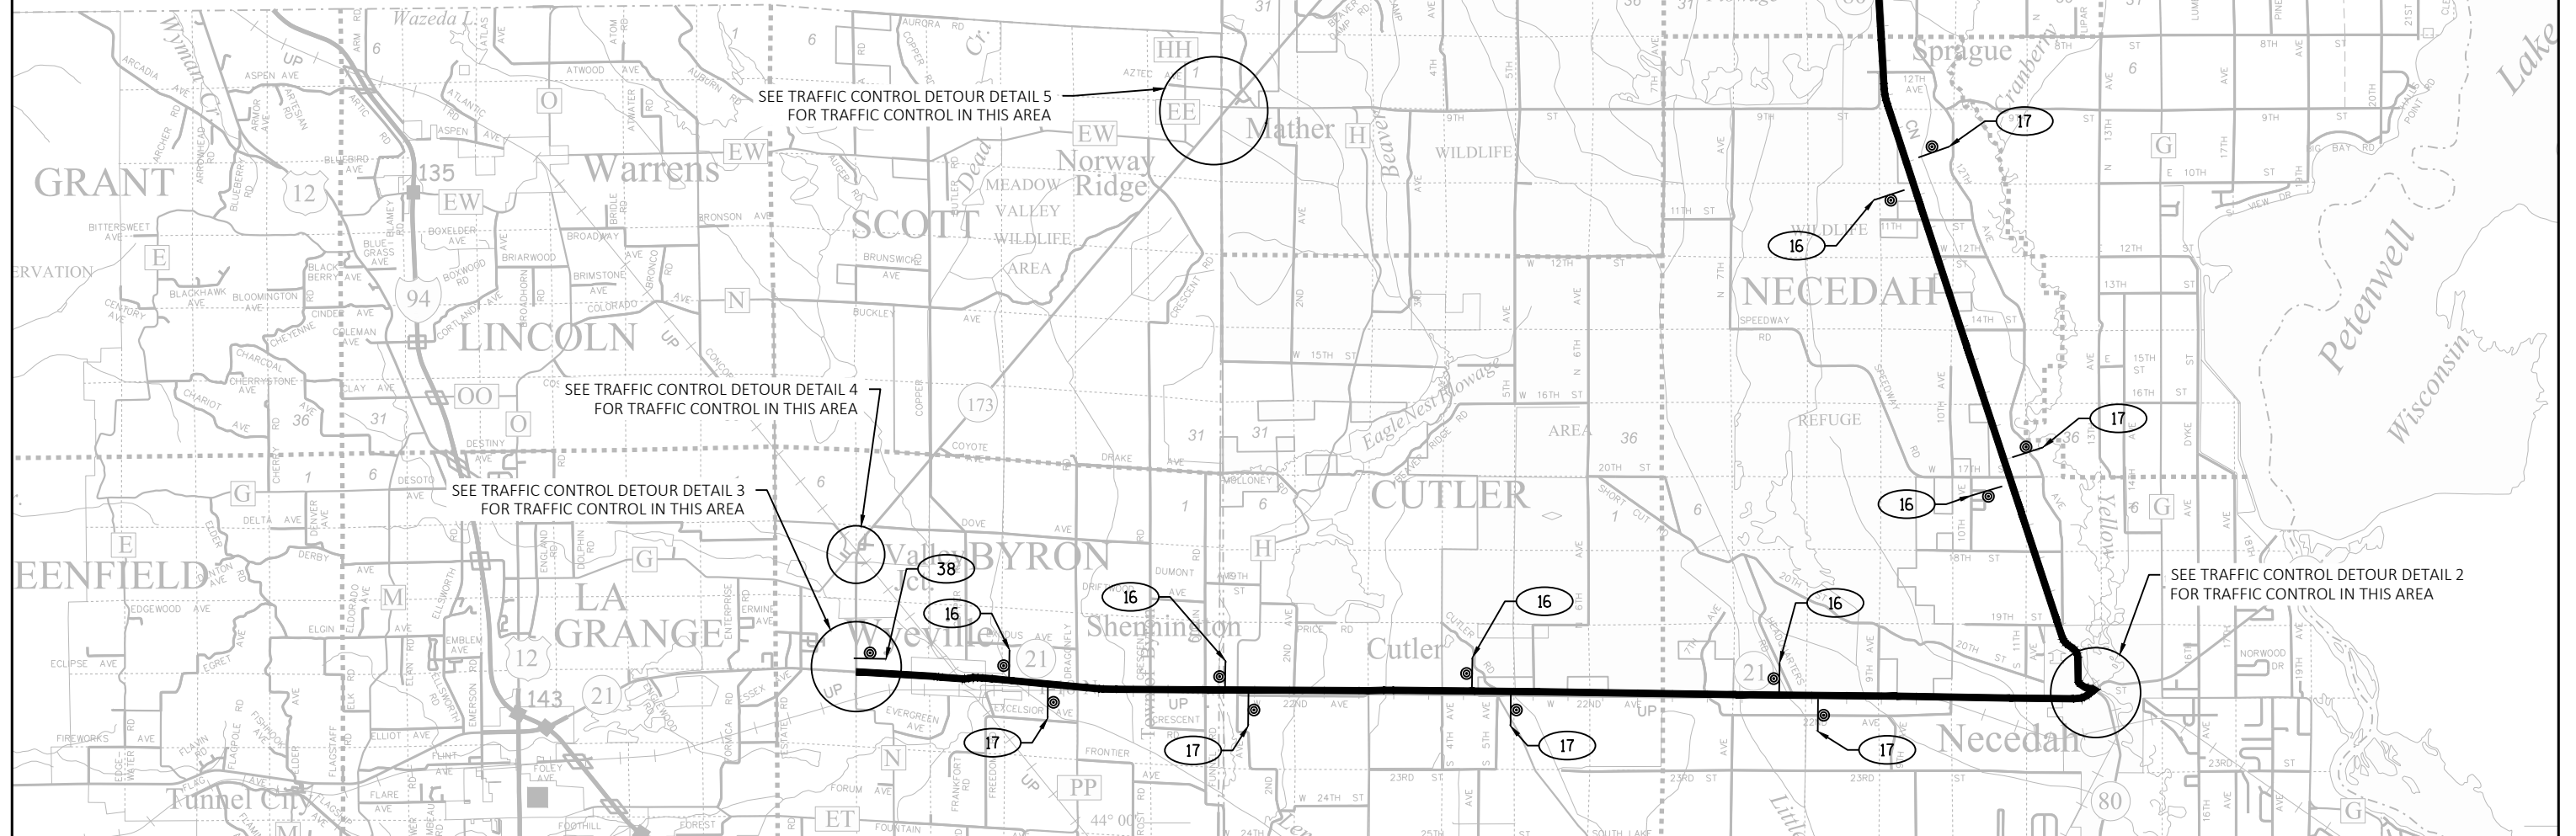


TRAFFIC CONTROL DETOUR DETAIL 1

Babcock

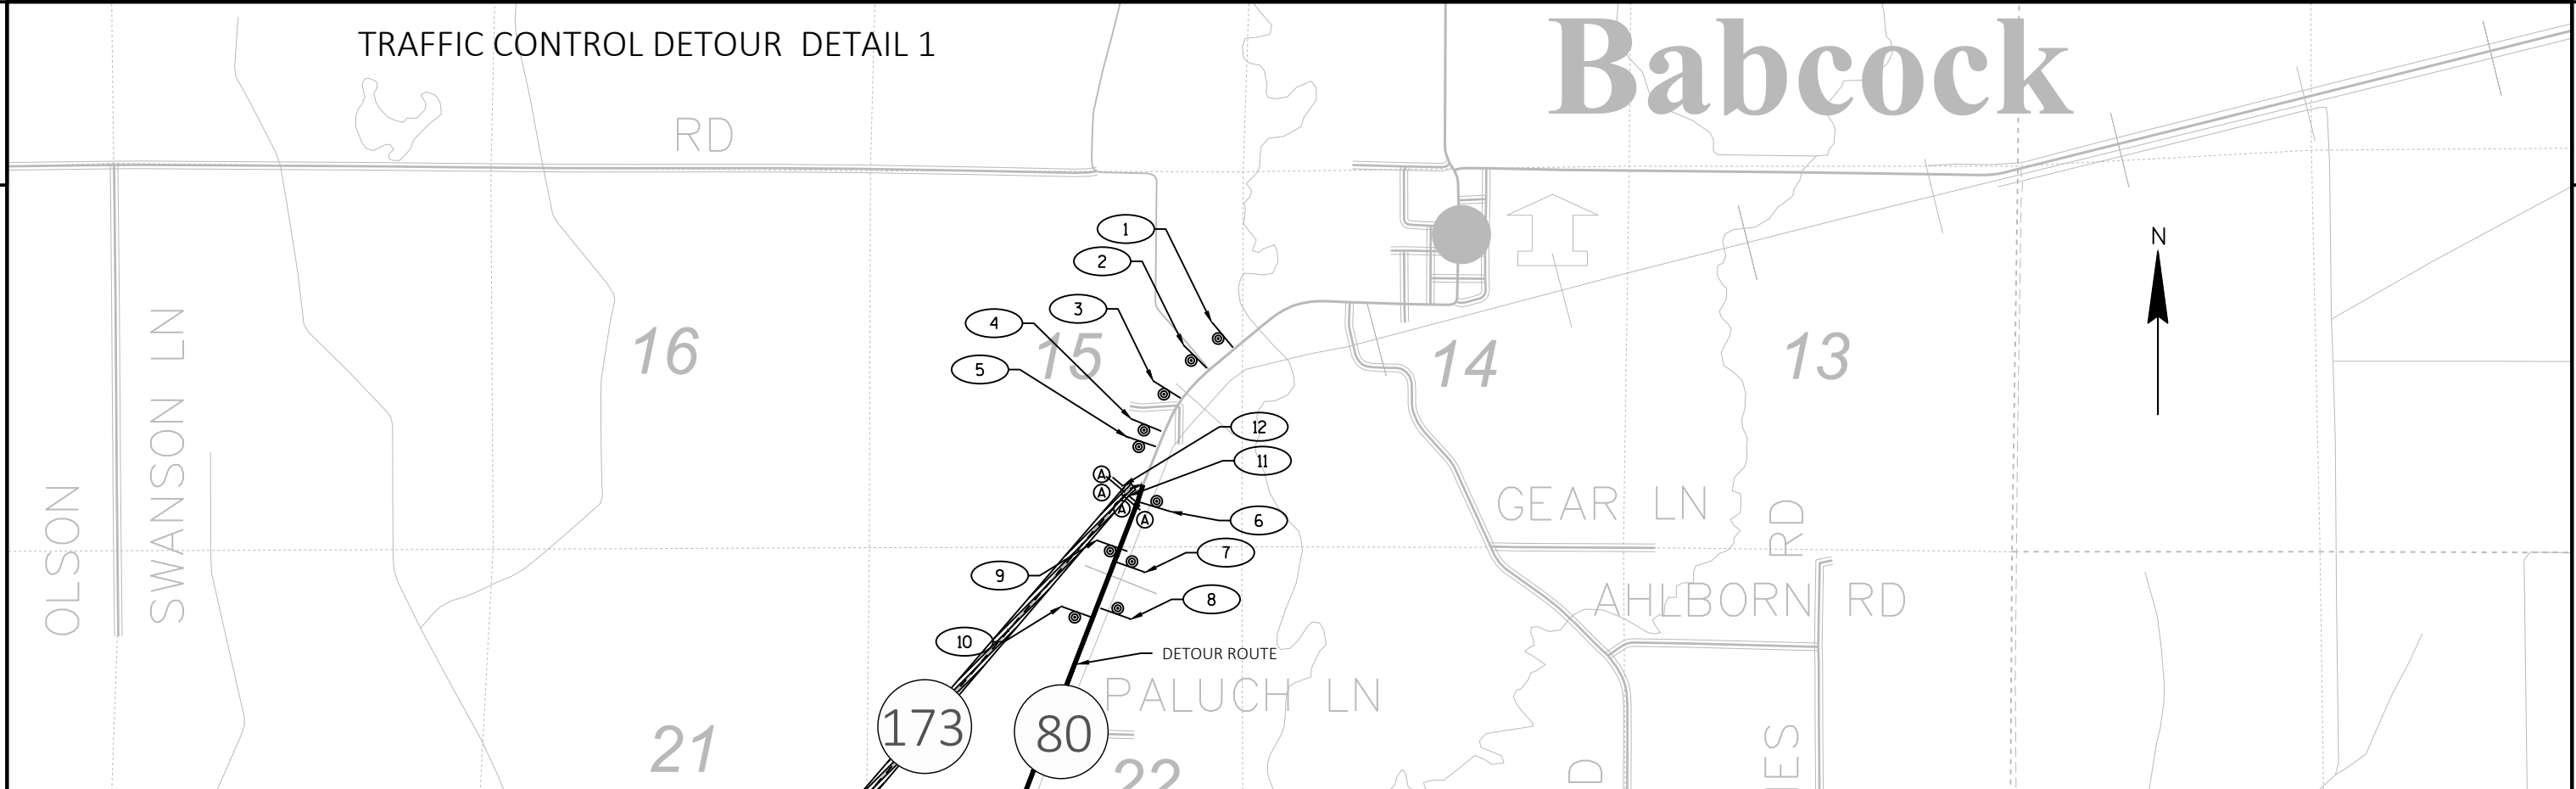

LEGEND


- TYPE III BARRICADE
- TYPE III BARRICADE WITH ATTACHED SIGN
- SIGN ON PERMANENT SUPPORT
- TYPE A WARNING LIGHT (FLASHING)
- WORK AREA
- DIRECTION OF TRAFFIC
- EXISTING SIGN
- EXISTING SIGN TO BE COVERED

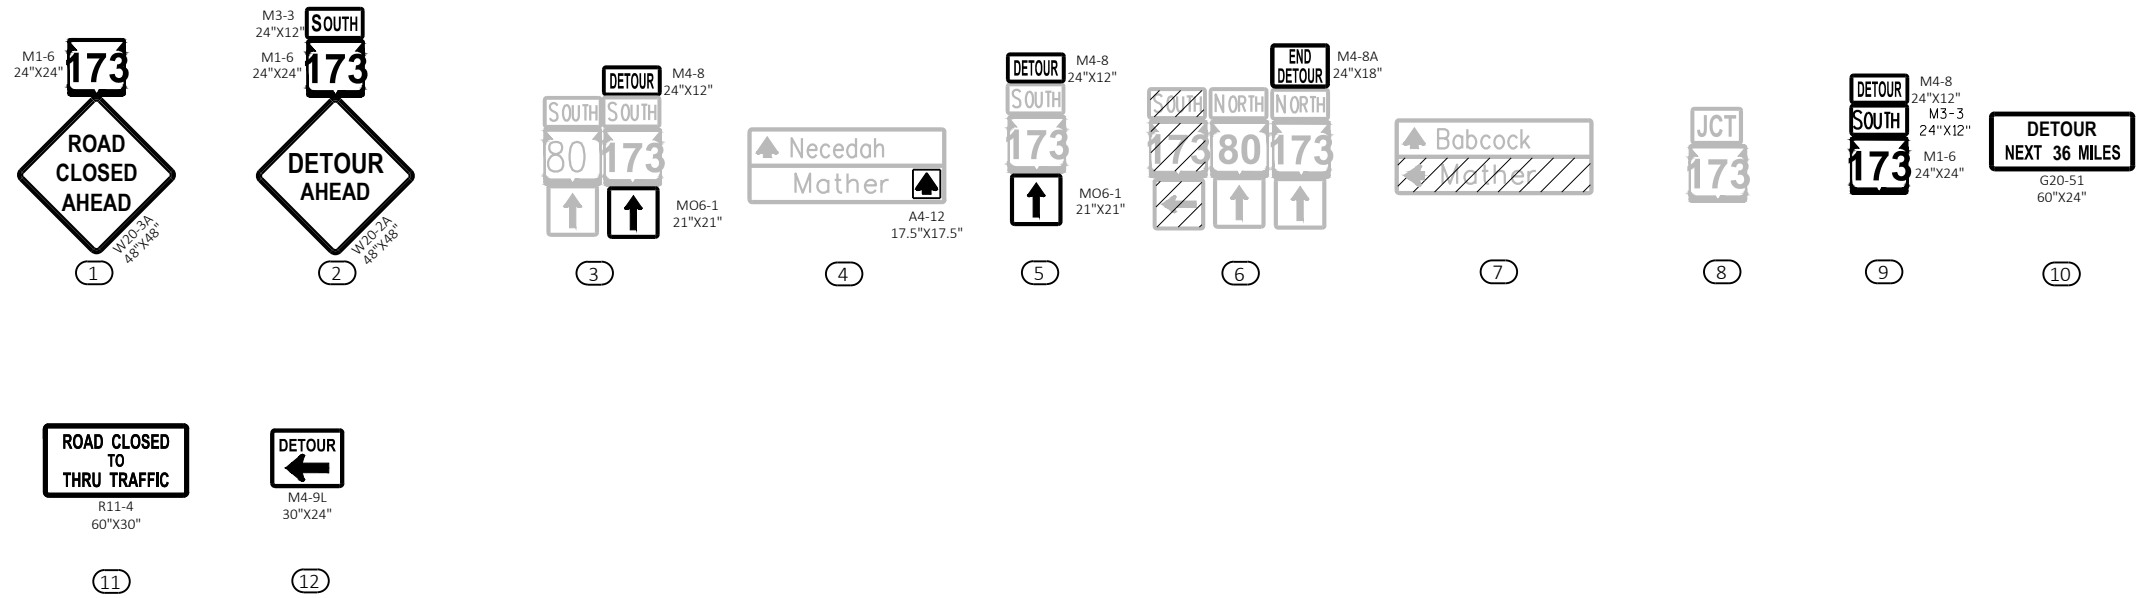







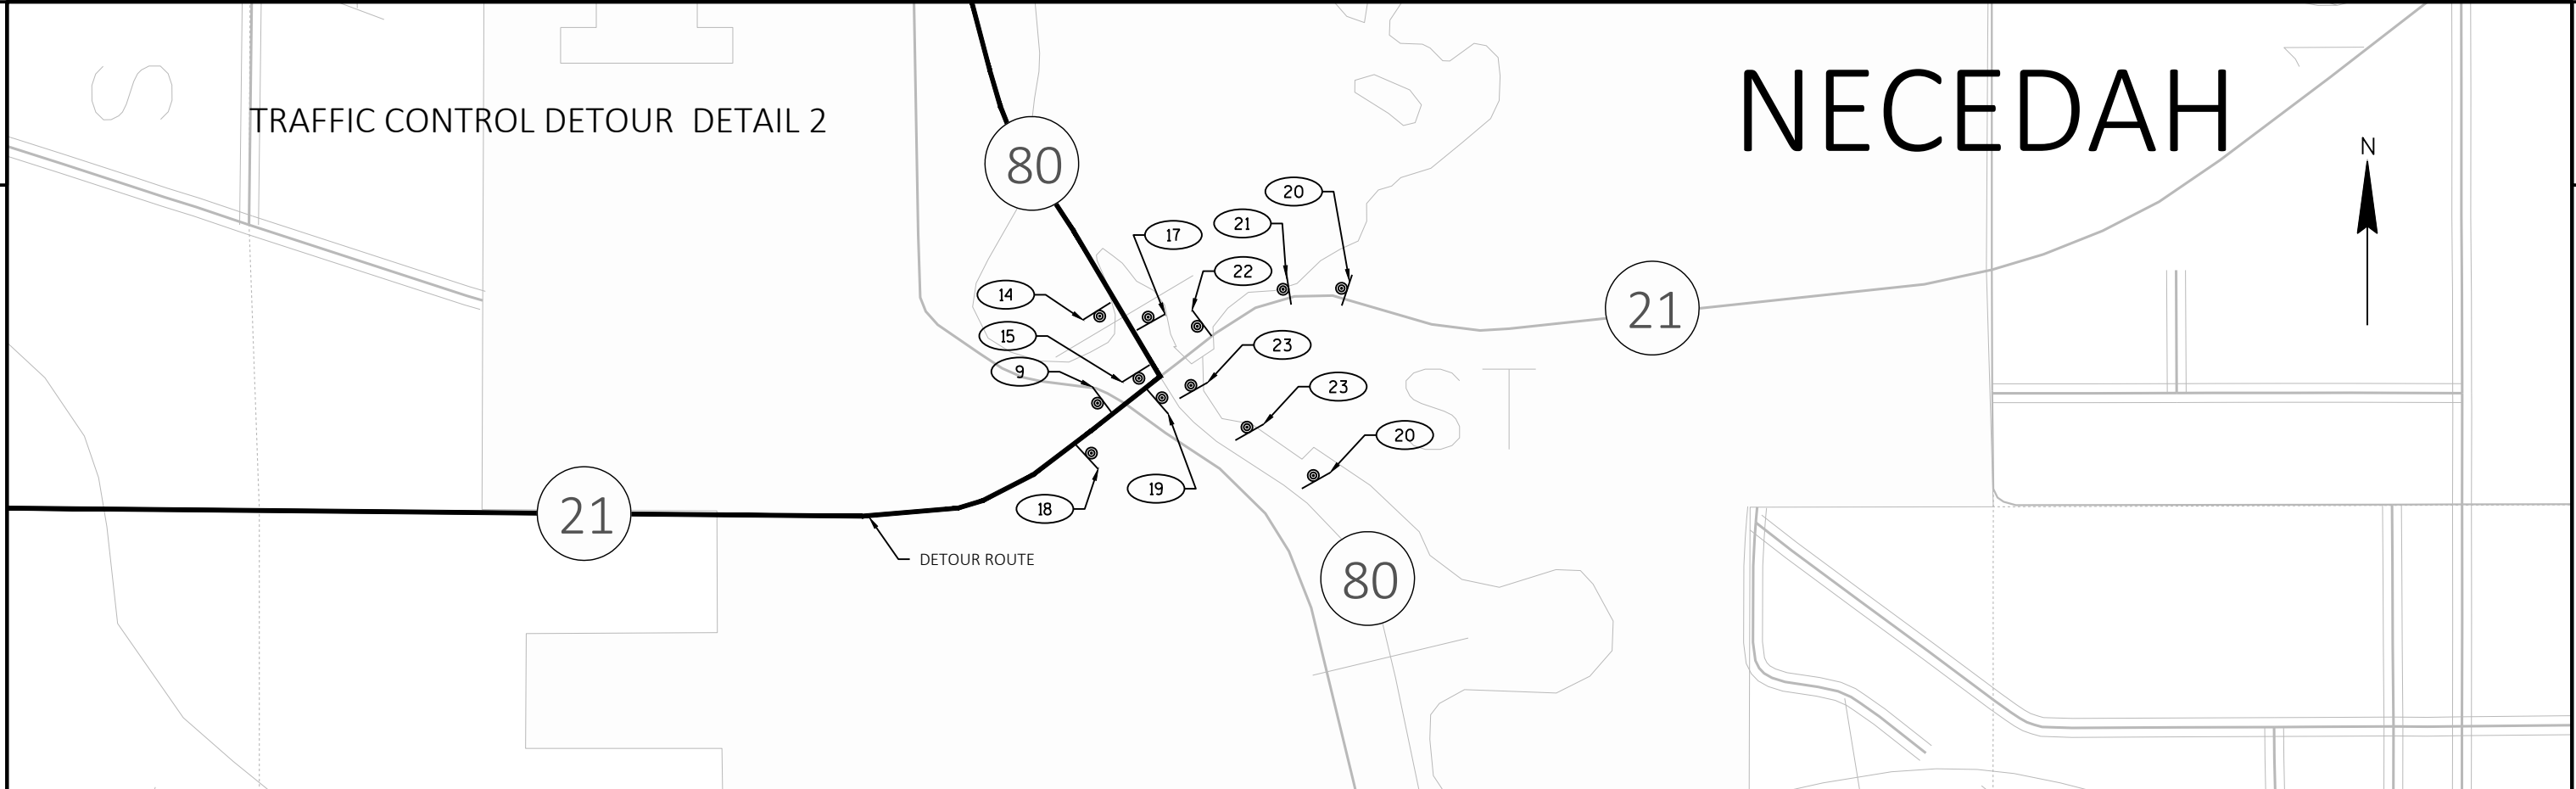

NOTES:
 SEE SDD "BARRICADES AND SIGNS FOR MAINLINE CLOSURES"
 SEE SDD "DETOUR SIGNING FOR MAINLINE CLOSURES"


TRAFFIC CONTROL DETOUR DETAIL 2

NECEDAH



LEGEND

-  TYPE III BARRICADE
-  TYPE III BARRICADE WITH ATTACHED SIGN
-  SIGN ON PERMANENT SUPPORT
-  TYPE A WARNING LIGHT (FLASHING)
-  WORK AREA
-  DIRECTION OF TRAFFIC
-  EXISTING SIGN
-  EXISTING SIGN TO BE COVERED

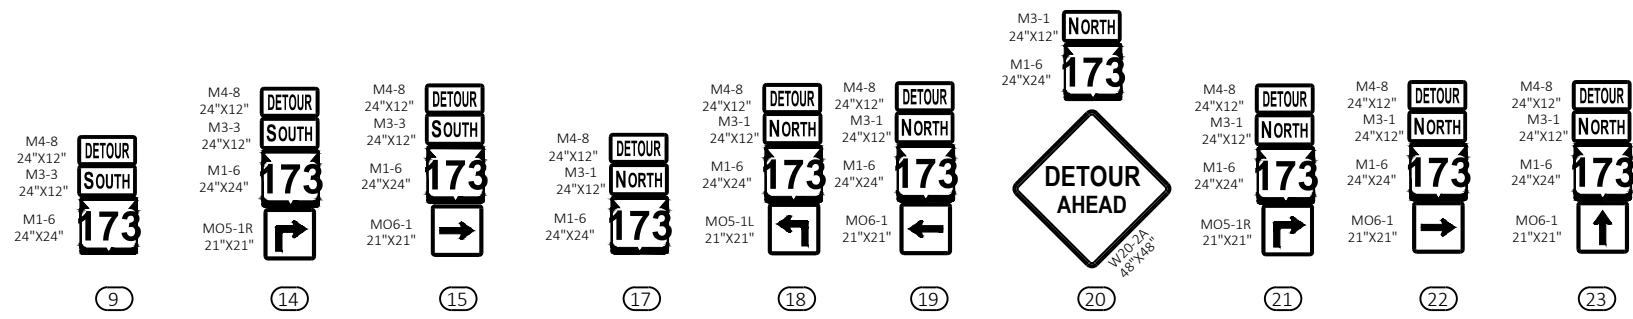


NOTES:
 SEE SDD "BARRICADES AND SIGNS FOR MAINLINE CLOSURES"
 SEE SDD "DETOUR SIGNING FOR MAINLINE CLOSURES"

TRAFFIC CONTROL DETOUR DETAIL 3


2

2



LEGEND

- TYPE III BARRICADE
- TYPE III BARRICADE WITH ATTACHED SIGN
- SIGN ON PERMANENT SUPPORT
- TYPE A WARNING LIGHT (FLASHING)
- WORK AREA
- DIRECTION OF TRAFFIC
- EXISTING SIGN
- EXISTING SIGN TO BE COVERED



NOTES:
 SEE SDD "BARRICADES AND SIGNS FOR MAINLINE CLOSURES"
 SEE SDD "DETOUR SIGNING FOR MAINLINE CLOSURES"

PROJECT NO: 7020-00-71


HWY: STH 173

COUNTY: WOOD COUNTY









TRAFFIC CONTROL DETOUR DETAIL 3


SHEET

E




LEGEND

-  TYPE III BARRICADE
-  TYPE III BARRICADE WITH ATTACHED SIGN
-  SIGN ON PERMANENT SUPPORT
-  TYPE A WARNING LIGHT (FLASHING)
-  WORK AREA
-  DIRECTION OF TRAFFIC
-  EXISTING SIGN
-  EXISTING SIGN TO BE COVERED




NOTES:
 SEE SDD "BARRICADES AND SIGNS FOR MAINLINE CLOSURES"
 SEE SDD "DETOUR SIGNING FOR MAINLINE CLOSURES"



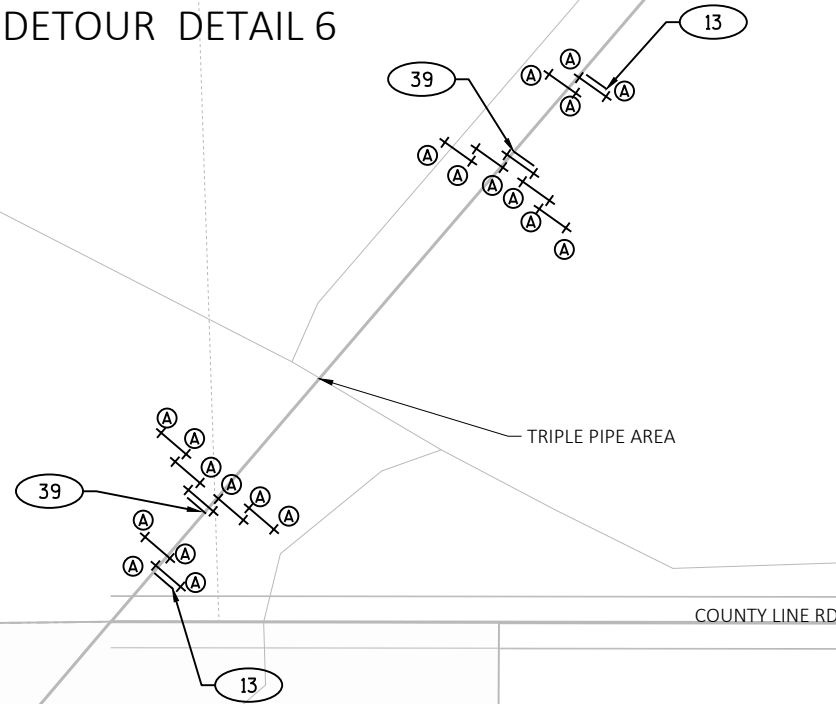



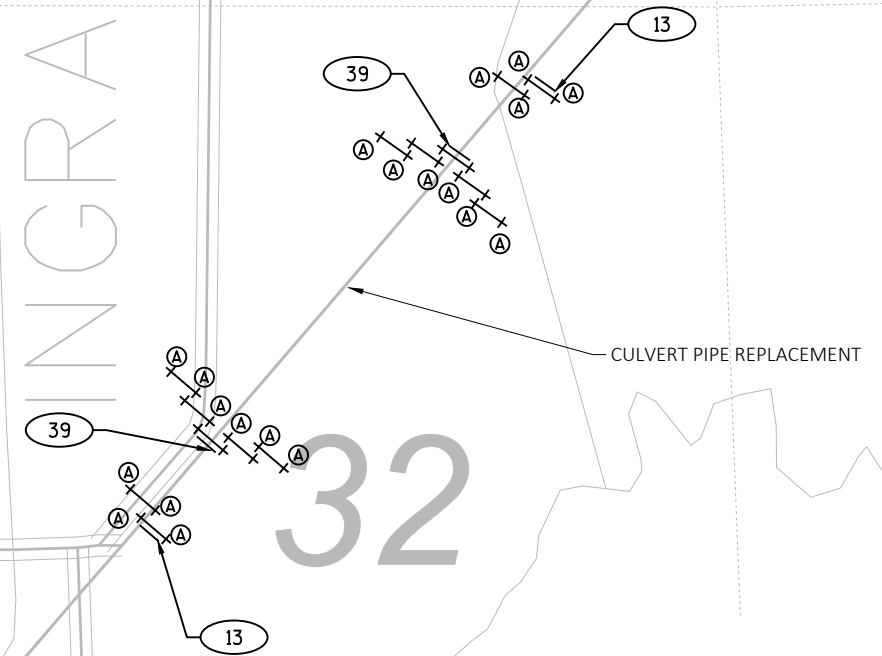

TRAFFIC CONTROL DETOUR DETAIL 6



TRAFFIC CONTROL DETOUR DETAIL 7



LEGEND

-  TYPE III BARRICADE
-  TYPE III BARRICADE WITH ATTACHED SIGN
-  SIGN ON PERMANENT SUPPORT
-  TYPE A WARNING LIGHT (FLASHING)
-  WORK AREA
-  DIRECTION OF TRAFFIC
-  EXISTING SIGN
-  EXISTING SIGN TO BE COVERED

**BRIDGE
OUT**

R11-2B
48"x30"

13

**ROAD
CLOSED**

R11-2
48"x30"

39

NOTES:
 SEE SDD "BARRICADES AND SIGNS FOR MAINLINE CLOSURES"
 SEE SDD "DETOUR SIGNING FOR MAINLINE CLOSURES"

Estimate Of Quantities

7020-00-71

Line	Item	Item Description	Unit	Total	Qty
0002	203.0100	Removing Small Pipe Culverts	EACH	1.000	1.000
0004	204.0110	Removing Asphaltic Surface	SY	63.000	63.000
0006	204.0115	Removing Asphaltic Surface Butt Joints	SY	534.000	534.000
0008	204.0120	Removing Asphaltic Surface Milling	SY	52,940.000	52,940.000
0010	204.0165	Removing Guardrail	LF	333.000	333.000
0012	204.9090.S	Removing (item description) 01. Silt Fence	LF	1,987.000	1,987.000
0014	204.9180.S	Removing (item description) 01. Concrete Rumble Strips	SY	90.000	90.000
0016	205.0100	Excavation Common	CY	796.000	796.000
0018	208.1100	Select Borrow	CY	47.000	47.000
0020	211.0100	Prepare Foundation for Asphaltic Paving (project) 01. 7020-00-71	LS	1.000	1.000
0022	211.0400	Prepare Foundation for Asphaltic Shoulders	STA	440.000	440.000
0024	213.0100	Finishing Roadway (project) 01. 7020-00-71	EACH	1.000	1.000
0026	305.0110	Base Aggregate Dense 3/4-Inch	TON	2,358.000	2,358.000
0028	305.0120	Base Aggregate Dense 1 1/4-Inch	TON	652.000	652.000
0030	312.0110	Select Crushed Material	TON	582.000	582.000
0032	455.0605	Tack Coat	GAL	8,851.000	8,851.000
0034	460.2000	Incentive Density HMA Pavement	DOL	10,550.000	10,550.000
0036	460.6223	HMA Pavement 3 MT 58-28 S	TON	9,243.000	9,243.000
0038	460.6224	HMA Pavement 4 MT 58-28 S	TON	7,230.000	7,230.000
0040	465.0105	Asphaltic Surface	TON	218.000	218.000
0042	465.0120	Asphaltic Surface Driveways and Field Entrances	TON	11.000	11.000
0044	465.0450	Asphaltic Intersection Rumble Strips	SY	72.000	72.000
0046	465.0475	Asphalt Centerline Rumble Strips 2-Lane Rural	LF	20,095.000	20,095.000
0048	522.0430	Culvert Pipe Reinforced Concrete Class IV 30-Inch	LF	46.000	46.000
0050	522.1030	Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	EACH	2.000	2.000
0052	606.0100	Riprap Light	CY	96.000	96.000
0054	606.0300	Riprap Heavy	CY	62.000	62.000
0056	614.2300	MGS Guardrail 3	LF	350.000	350.000
0058	614.2350	MGS Guardrail Short Radius	LF	48.000	48.000
0060	614.2610	MGS Guardrail Terminal EAT	EACH	3.000	3.000
0062	614.2630	MGS Guardrail Short Radius Terminal	EACH	1.000	1.000
0064	618.0100	Maintenance And Repair of Haul Roads (project) 01. 7020-00-71	EACH	1.000	1.000
0066	619.1000	Mobilization	EACH	1.000	1.000
0068	624.0100	Water	MGAL	59.000	59.000
0070	625.0100	Topsoil	SY	605.000	605.000
0072	627.0200	Mulching	SY	34.000	34.000
0074	628.1504	Silt Fence	LF	1,987.000	1,987.000
0076	628.1520	Silt Fence Maintenance	LF	1,987.000	1,987.000
0078	628.1905	Mobilizations Erosion Control	EACH	3.000	3.000
0080	628.1910	Mobilizations Emergency Erosion Control	EACH	2.000	2.000
0082	628.2008	Erosion Mat Urban Class I Type B	SY	605.000	605.000
0084	628.6005	Turbidity Barriers	SY	395.000	395.000
0086	628.7555	Culvert Pipe Checks	EACH	5.000	5.000
0088	628.7570	Rock Bags	EACH	44.000	44.000
0090	629.0210	Fertilizer Type B	CWT	0.410	0.410
0092	630.0120	Seeding Mixture No. 20	LB	20.000	20.000
0094	630.0500	Seed Water	MGAL	14.400	14.400
0096	633.5200	Markers Culvert End	EACH	2.000	2.000
0098	642.5001	Field Office Type B	EACH	1.000	1.000

Estimate Of Quantities

7020-00-71

Line	Item	Item Description	Unit	Total	Qty
0002	203.0100	Removing Small Pipe Culverts	EACH	1.000	1.000
0004	204.0110	Removing Asphaltic Surface	SY	63.000	63.000
0006	204.0115	Removing Asphaltic Surface Butt Joints	SY	534.000	534.000
0008	204.0120	Removing Asphaltic Surface Milling	SY	52,940.000	52,940.000
0010	204.0165	Removing Guardrail	LF	333.000	333.000
0012	204.9090.S	Removing (item description) 01. Silt Fence	LF	1,987.000	1,987.000
0014	204.9180.S	Removing (item description) 01. Concrete Rumble Strips	SY	90.000	90.000
0016	205.0100	Excavation Common	CY	796.000	796.000
0018	208.1100	Select Borrow	CY	47.000	47.000
0020	211.0100	Prepare Foundation for Asphaltic Paving (project) 01. 7020-00-71	LS	1.000	1.000
0022	211.0400	Prepare Foundation for Asphaltic Shoulders	STA	440.000	440.000
0024	213.0100	Finishing Roadway (project) 01. 7020-00-71	EACH	1.000	1.000
0026	305.0110	Base Aggregate Dense 3/4-Inch	TON	2,358.000	2,358.000
0028	305.0120	Base Aggregate Dense 1 1/4-Inch	TON	652.000	652.000
0030	312.0110	Select Crushed Material	TON	582.000	582.000
0032	455.0605	Tack Coat	GAL	8,851.000	8,851.000
0034	460.2000	Incentive Density HMA Pavement	DOL	10,550.000	10,550.000
0036	460.6223	HMA Pavement 3 MT 58-28 S	TON	9,243.000	9,243.000
0038	460.6224	HMA Pavement 4 MT 58-28 S	TON	7,230.000	7,230.000
0040	465.0105	Asphaltic Surface	TON	218.000	218.000
0042	465.0120	Asphaltic Surface Driveways and Field Entrances	TON	11.000	11.000
0044	465.0450	Asphaltic Intersection Rumble Strips	SY	72.000	72.000
0046	465.0475	Asphalt Centerline Rumble Strips 2-Lane Rural	LF	20,095.000	20,095.000
0048	522.0430	Culvert Pipe Reinforced Concrete Class IV 30-Inch	LF	46.000	46.000
0050	522.1030	Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	EACH	2.000	2.000
0052	606.0100	Riprap Light	CY	96.000	96.000
0054	606.0300	Riprap Heavy	CY	62.000	62.000
0056	614.2300	MGS Guardrail 3	LF	350.000	350.000
0058	614.2350	MGS Guardrail Short Radius	LF	48.000	48.000
0060	614.2610	MGS Guardrail Terminal EAT	EACH	3.000	3.000
0062	614.2630	MGS Guardrail Short Radius Terminal	EACH	1.000	1.000
0064	618.0100	Maintenance And Repair of Haul Roads (project) 01. 7020-00-71	EACH	1.000	1.000
0066	619.1000	Mobilization	EACH	1.000	1.000
0068	624.0100	Water	MGAL	59.000	59.000
0070	625.0100	Topsoil	SY	605.000	605.000
0072	627.0200	Mulching	SY	34.000	34.000
0074	628.1504	Silt Fence	LF	1,987.000	1,987.000
0076	628.1520	Silt Fence Maintenance	LF	3,974.000	3,974.000
0078	628.1905	Mobilizations Erosion Control	EACH	3.000	3.000
0080	628.1910	Mobilizations Emergency Erosion Control	EACH	2.000	2.000
0082	628.2008	Erosion Mat Urban Class I Type B	SY	605.000	605.000
0084	628.6005	Turbidity Barriers	SY	395.000	395.000
0086	628.7555	Culvert Pipe Checks	EACH	5.000	5.000
0088	628.7570	Rock Bags	EACH	44.000	44.000
0090	629.0210	Fertilizer Type B	CWT	0.410	0.410
0092	630.0120	Seeding Mixture No. 20	LB	20.000	20.000
0094	630.0500	Seed Water	MGAL	14.400	14.400
0096	633.5200	Markers Culvert End	EACH	2.000	2.000
0098	642.5001	Field Office Type B	EACH	1.000	1.000

Estimate Of Quantities

7020-00-71

Line	Item	Item Description	Unit	Total	Qty
0100	643.0300	Traffic Control Drums	DAY	60.000	60.000
0102	643.0420	Traffic Control Barricades Type III	DAY	174.000	174.000
0104	643.0705	Traffic Control Warning Lights Type A	DAY	222.000	222.000
0106	643.0900	Traffic Control Signs	DAY	657.000	657.000
0108	643.0920	Traffic Control Covering Signs Type II	EACH	12.000	12.000
0110	643.1000	Traffic Control Signs Fixed Message	SF	36.000	36.000
0112	643.5000	Traffic Control	EACH	1.000	1.000
0114	645.0120	Geotextile Type HR	SY	155.000	155.000
0116	645.0130	Geotextile Type R	SY	484.000	484.000
0118	645.0140	Geotextile Type SAS	SY	210.000	210.000
0120	645.0220	Geogrid Type SR	SY	433.000	433.000
0122	646.1020	Marking Line Epoxy 4-Inch	LF	6,577.000	6,577.000
0124	646.1040	Marking Line Grooved Wet Ref Epoxy 4-Inch	LF	43,894.000	43,894.000
0126	648.0100	Locating No-Passing Zones	MI	4.160	4.160
0128	649.0105	Temporary Marking Line Paint 4-Inch	LF	1,756.000	1,756.000
0130	649.0120	Temporary Marking Line Epoxy 4-Inch	LF	6,577.000	6,577.000
0132	650.4500	Construction Staking Subgrade	LF	45.000	45.000
0134	650.5000	Construction Staking Base	LF	231.000	231.000
0136	650.6000	Construction Staking Pipe Culverts	EACH	1.000	1.000
0138	650.8000	Construction Staking Resurfacing Reference	LF	21,947.000	21,947.000
0140	650.9910	Construction Staking Supplemental Control (project) 01. 7020-00-71	LS	1.000	1.000
0142	650.9920	Construction Staking Slope Stakes	LF	620.000	620.000
0144	690.0150	Sawing Asphalt	LF	153.000	153.000
0146	740.0440	Incentive IRI Ride	DOL	16,631.000	16,631.000
0148	ASP.1T0A	On-the-Job Training Apprentice at \$5.00/HR	HRS	1,200.000	1,200.000
0150	ASP.1T0G	On-the-Job Training Graduate at \$5.00/HR	HRS	600.000	600.000
0152	SPV.0035	Special 01. Backfill Slurry	CY	22.000	22.000
0154	SPV.0180	Special 01. Sealing Top of Pipe Area	SY	79.000	79.000
0156	SPV.0195	Special 01. Select Crushed Material For Travel Corridor	TON	23.000	23.000

3

3

BASE AGGREGATE

CATEGORY	STATION	TO	STATION	LOCATION	SELECT BORROW CY	208.1100	305.0110	305.0120	312.0110	624.0100	REMARKS
						BASE AGGREGATE DENSE 3/4-INCH TON	BASE AGGREGATE DENSE 1 1/4- INCH TON	SELECT CRUSHED MATERIAL TON	WATER MGAL		
0010	1285+11	-	1288+80	MAINLINE	---	36	---	---	---	---	
0010	1288+80	-	1293+95	MAINLINE	47	215	386	582	---	---	OVER TRIPLE PIPES
0010	1293+95	-	1330+49	MAINLINE	---	353	---	---	---	---	
0010	1330+49	-	1331+54	MAINLINE	---	54	266	---	---	---	OVER SINGLE PIPE
0010	1331+54	-	1504+58	MAINLINE	---	1,669	---	---	---	---	
0010	1289+87	-	---	LT	---	3	---	---	---	---	DRIVEWAY
0010	INGRAM RD	-	---	NORTH	---	5	---	---	---	---	SIDE ROAD
0010	1337+62	-	---	RT	---	2	---	---	---	---	DRIVEWAY
0010	ZIMMERMAN RD	-	---	LT	---	5	---	---	---	---	SIDE ROAD
0010	1407+40	-	---	LT	---	2	---	---	---	---	DRIVEWAY
0010	1447+54	-	---	LT	---	2	---	---	---	---	DRIVEWAY
0010	1457+73	-	---	RT	---	3	---	---	---	---	DRIVEWAY
0010	1460+39	-	---	RT	---	2	---	---	---	---	DRIVEWAY
0010	1463+79	-	---	LT	---	2	---	---	---	---	DRIVEWAY
0010	1485+86	-	---	RT	---	2	---	---	---	---	DRIVEWAY
0010	1503+12	-	---	LT	---	3	---	---	---	---	DRIVEWAY
0010	1285+11	-	1504+58		---	---	---	---	59	---	
TOTAL 0010					47	2,358	652	582	59		

HMA PAVEMENT

CATEGORY	STATION	TO	STATION	LOCATION	THICKNESS	455.0605	460.6223	460.6224	465.0105	
						TACK COAT GAL	HMA PAVEMENT 3 MT 58-28 S TON	HMA PAVEMENT 4 MT 58-28 S TON	ASPHALTIC SURFACE TON	
0010	1285+11	-	1291+05	UPPER LAYER	1.75	101	---	198	---	
0010	1285+11	-	1291+05	LOWER LAYER	2.25	142	255	---	---	
0010	1291+05	-	1292+24	UPPER LAYER	1.75	24	---	47	---	
0010	1291+05	-	1292+24	MIDDLE LAYER	2.25	34	60	---	---	
0010	1291+05	-	1292+24	LOWER LAYER	3.00	---	---	---	80	
0010	1292+24	-	1504+58	UPPER LAYER	1.75	3,543	---	6,944	---	
0010	1292+24	-	1504+58	LOWER LAYER	2.25	4,960	8,928	---	---	
0010	1330+49	-	1331+54	PATCH	7.00	25	---	---	138	
0010	COUNTY LINE RD	-	RT	SINGLE LAYER	1.75	7	---	13	---	
0010	INGRAM RD	-	SOUTH	SINGLE LAYER	1.75	4	---	7	---	
0010	AMUNDSON RD	-	LT	SINGLE LAYER	1.75	5	---	9	---	
0010	ZIMMERMAN RD	-	RT	SINGLE LAYER	1.75	6	---	12	---	
TOTAL 0010						8,851	9,243	7,230	218	

INTERSECTION RUMBLE STRIPS

CATEGORY	STATION	TO	STATION	LOCATION	465.0450 ASPHALTIC INTERSECTION RUMBLE STRIPS SY
0010	1492+18	-	1492+43	RT	24
0010	1499+54	-	1499+79	RT	24
0010	1501+79	-	1502+04	RT	24
TOTAL 0010					72

RUMBLE STRIPS

CATEGORY	STATION	TO	STATION	LOCATION	465.0475 ASPHALT CENTERLINE RUMBLE STRIPS 2-LANE RURAL LF
0010	1287+40	-	1314+85	CENTERLINE	2,745
0010	1322+10	-	1370+00	CENTERLINE	4,790
0010	1374+52	-	1495+43	CENTERLINE	12,091
0010	1497+43	-	1502+12	CENTERLINE	469
TOTAL 0010					20,095

DRIVEWAYS

CATEGORY	STATION	INCHES	LOCATION	465.0120 ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES TON
0010	1290+85	1.75	LT	6
0010	1496+43	1.75	LT	3
0010	1497+15	1.75	RT	2
TOTAL 0010				11

CULVERTS

CATEGORY	STATION	LOCATION	522.0430 CULVERT PIPE REINFORCED CONCRETE CLASS IV 30-INCH LF	522.1030 APRON ENDWALLS FOR CULVERT PIPE REINFORCED CONCRETE 30- INCH EACH	633.5200 MARKERS CULVERT END EACH	650.6000 CONSTRUCTION STAKING PIPE CULVERTS EACH
0010	1331+01	MAINLINE	46	2	2	1
TOTAL 0010			46	2	2	1

RIPRAP

CATEGORY	STATION	TO	STATION	LOCATION	606.0100 RIPRAP LIGHT CY	606.0300 RIPRAP HEAVY CY	645.0120 GEOTEXTILE TYPE HR SY	645.0130 GEOTEXTILE TYPE R SY	645.0220 GEOGRID TYPE SR SY	SPV.0195.01 SPECIAL (01. SELECT CRUSHED MATERIAL FOR TRAVEL CORRIDOR) TON	REMARKS
0010	1291+29	-	1291+91	LT	---	27	69	---	---	11	
0010	1291+39	-	1292+00	RT	---	35	86	---	---	12	
0010	1291+18	-	1292+11	ROADWAY	---	---	---	---	433	---	
0010	1328+50	-	1331+15	RT	45	---	---	222	---	---	MUSKRAT DETAIL
0010	1362+00	-	1363+00	RT	17	---	---	85	---	---	MUSKRAT DETAIL
0010	UNDISTRIBUTED			RT & LT	34	---	---	177	---	---	MUSKRAT DETAIL (10 LOCATIONS)
TOTAL 0010					96	62	155	484	433	23	

GUARDRAIL

CATEGORY	STATION	TO	STATION	LOCATION	614.2300 MGS GUARDRAIL 3 LF	614.2350 MGS GUARDRAIL SHORT RADIUS LF	614.2610 MGS GUARDRAIL TERMINAL EAT EACH	614.2630 MGS GUARDRAIL SHORT RADIUS TERMINAL EACH
0010	1290+08	-	1293+02	RT	187.5	---	2	---
0010	1290+98	-	1293+22	LT	162.5	48	1	1
TOTAL 0010					350.0	48	3	1

SILT FENCE

CATEGORY	STATION	TO	STATION	LOCATION	204.9090.S.01 REMOVING (ITEM DESCRIPTION) (01. SILT FENCE)			
					LF	LF	LF	ROCK BAGS EACH
0010	1291+21	-	1291+30	LT	35	35	70	---
0010	1289+46	-	1291+42	RT	235	235	470	---
0010	1291+96	-	1294+34	RT	276	276	552	---
0010	1291+84	-	1294+42	LT	285	285	570	---
0010	1327+62	-	1330+94	RT	360	360	720	---
0010	1328+14	-	1330+94	LT	301	301	602	---
0010	1331+06	-	1333+41	LT	260	260	520	18
0010	1331+08	-	1333+17	RT	235	235	470	18
			UNDISTRIBUTED		---	---	---	8
TOTAL 0010					1,987	1,987	3,974	44

TURBIDITY BARRIERS

CATEGORY	STATION	TO	STATION	LOCATION	628.6005 TURBIDITY BARRIERS		REMARKS
					SY		
0010	1291+33	-	1291+79	RT	70		STAGE 1
0010	1291+25	-	1291+64	LT	58		STAGE 1
0010	1291+64	-	1292+16	RT	78		STAGE 2
0010	1291+51	-	1291+88	LT	76		STAGE 2
0010	1330+69	-	1331+33	LT	58		
0010	1330+69	-	1331+32	RT	55		
TOTAL 0010					395		

MOBILIZATIONS EROSION CONTROL

CATEGORY	LOCATION	628.1905 MOBILIZATIONS EROSION CONTROL EACH		628.1910 MOBILIZATIONS EMERGENCY EROSION CONTROL EACH	
0010	PROJECT 7020-00-71	3		2	
TOTAL 0010		3		2	

RESTORATION

CATEGORY	STATION	TO	STATION	LOCATION	625.0100		627.0200		628.2008 EROSION MAT URBAN CLASS I		628.7555 CULVERT PIPE CHECKS EACH		629.0210 FERTILIZER TYPE B CWT		630.0120 SEEDING MIXTURE NO. 20 LB		630.0500 SEED WATER MGAL	
					TOPSOIL SY	MULCHING SY	TYPE B SY											
0010	1291+00	-	1294+38	LT	78	---	78	---	0.10		3	1.8						
0010	1288+90	-	1294+25	RT	299	28	299	---	0.10		9	6.7						
0010	1330+49	-	1331+54	LT	77	---	77	5	0.10		3	1.8						
0010	1330+49	-	1331+54	RT	50	---	50	---	0.10		2	1.2						
0010			UNDISTRIBUTED		101	6	101	---	0.01		3	2.9						
TOTAL 0010					605	34	605	5	0.41		20	14.4						

TRAFFIC CONTROL

CATEGORY	STATION	LOCATION	DAYS	643.0300		643.0420		643.0705		643.1000		REMARKS
				TRAFFIC CONTROL DRUMS EACH	TRAFFIC CONTROL DRUMS DAY	TRAFFIC CONTROL BARRICADES TYPE III EACH	TRAFFIC CONTROL BARRICADES TYPE III DAY	TRAFFIC CONTROL WARNING LIGHTS TYPE A EACH	TRAFFIC CONTROL WARNING LIGHTS TYPE A DAY	TRAFFIC CONTROL SIGNS FIXED MESSAGE SF		
0010	OVERVIEW	---	7	---	---	---	---	---	---	36	---	---
0010	INGRAM RD	RT	3	---	---	3	9	4	12	---	---	---
0010	INGRAM RD	LT	3	---	---	2	6	2	6	---	---	---
0010	AMUNDSON RD	LT	3	---	---	3	9	4	12	---	---	---
0010	ZIMMERMAN RD	RT & LT	3	---	---	5	15	6	18	---	---	---
0010	STH 173 & STH 80	INTERSECTION	3	---	---	7	21	8	24	---	---	TC DETAIL 1
0010	STH 21 & STH 173	INTERSECTION	3	---	---	2	6	2	6	---	---	TC DETAIL 3
0010	CTH G & STH 173	INTERSECTION	3	---	---	2	6	2	6	---	---	TC DETAIL 4
0010	CTH EW & STH 173	INTERSECTION	3	---	---	2	6	2	6	---	---	TC DETAIL 5
0010	CTH HH & STH 173	INTERSECTION	3	---	---	4	12	4	12	---	---	TC DETAIL 5
0010	1291+65	TRIPLE PIPES	3	---	---	14	42	20	60	---	---	TC DETAIL 6
0010	1331+01	CULVERT	3	---	---	14	42	20	60	---	---	TC DETAIL 7
0010	1290+08 - 1293+22	GUARDRAIL	3	20	60	---	---	---	---	---	---	---
TOTAL 0010					60		174		222		36	

SEE SDD "BARRICADES AND SIGNS FOR MAINLINE CLOSURES"
SEE SDD "BARRICADES AND SIGNS FOR SIDEROAD CLOSURES"

TRAFFIC CONTROL SIGNS

LOCATING NO-PASSING ZONES

CATEGORY	STATION	LOCATION	DAYS	643.0900		643.0920		NUMBER OF CYCLES EACH	NUMBER OF SIGNS EACH	REMARKS
				TRAFFIC CONTROL SIGNS EACH	TRAFFIC CONTROL SIGNS DAY	TRAFFIC CONTROL COVERING SIGNS TYPE II EACH	TRAFFIC CONTROL COVERING SIGNS TYPE II EACH			
0010	OVERVIEW	---	3	54	162	---	---	---	---	
0010	INGRAM RD	RT	3	3	9	---	---	---	---	SDD DETAIL 4
0010	INGRAM RD	LT	3	3	9	---	---	---	---	SDD DETAIL 4
0010	AMUNDSON RD	LT	3	3	9	---	---	---	---	SDD DETAIL 4
0010	ZIMMERMAN RD	RT & LT	3	6	18	---	---	---	---	SDD DETAIL 4
0010	STH 173 & STH 80	INTERSECTION	3	17	51	4	1	4	---	TC DETAIL 1
0010	STH 80 & STH 21	INTERSECTION	3	44	132	---	---	---	---	TC DETAIL 2
0010	STH 21 & STH 173	INTERSECTION	3	37	111	8	1	8	---	TC DETAIL 3
0010	CTH G & STH 173	INTERSECTION	3	11	33	---	---	---	---	TC DETAIL 4
0010	CTH HH & STH 173	INTERSECTION	3	33	99	---	---	---	---	TC DETAIL 5
0010	1291+65	TRIPLE PIPES	3	4	12	---	---	---	---	TC DETAIL 6
0010	1331+01	CULVERT	3	4	12	---	---	---	---	TC DETAIL 7
TOTAL 0010					657	12				

CATEGORY	STATION TO	STATION	LOCATION	648.0100
				LOCATING NO-PASSING ZONES MI
0010	1285+11 -	1504+58	STH 173	4.16
TOTAL 0010				4.16

PAVEMENT MARKING

STAKING

CATEGORY	STATION TO	STATION	LOCATION	**		***		****		REMARKS
				646.1020	646.1040	649.0105	649.0120			
				MARKING LINE EPOXY 4-INCH LF	MARKING LINE GROOVED WET REF EPOXY 4-INCH LF	TEMPORARY MARKING LINE PAINT 4-INCH LF	TEMPORARY MARKING LINE EPOXY 4-INCH LF			
0010	1285+11 -	1504+58	MAINLINE	6,577	---	---	6,577	CENTERLINE YELLOW, SKIPS & SOLID		
0010	1285+11 -	1504+58	MAINLINE	---	43,894	---	---	EDGELINE WHITE		
0010	1285+11 -	1504+58	MAINLINE	---	---	1,756	---	CENTERLINE YELLOW, 4' SKIPS		
TOTAL 0010				6,577	43,894	1,756	6,577			

CATEGORY	STATION TO	STATION	LOCATION	650.4500 - 650.5000 - 650.8000 - 650.9920			
				CONSTRUCTION STAKING SUBGRADE LF	CONSTRUCTION STAKING BASE LF	CONSTRUCTION STAKING RESURFACING LF	CONSTRUCTION STAKING SLOPE STAKES LF
0010	1285+11 -	1504+58	MAINLINE	---	---	21,947	---
0010	1288+80 -	1293+95	TRIPLE PIPES	---	---	---	515
0010	1330+49 -	1331+54	SINGLE PIPE	---	---	---	105
0010	1291+02 -	1292+28	TRIPLE PIPES	45	126	---	---
0010	1330+49 -	1331+54	SINGLE PIPE	---	105	---	---
TOTAL 0010				45	231	21,947	620

NOTES:

- ** TO BE PLACED FOLLOWING CENTERLINE RUMBLE STRIP MILLING
- *** TO BE PLACED ON CL FOLLOWING LOWER LAYER OF PAVEMENT
- **** TO BE PLACED ON CL FOLLOWING UPPER LAYER OF PAVEMENT

SAWING


BACKFILL SLURRY

SEALING PIPE

CATEGORY	STATION	LOCATION	690.0150	REMARKS
			SAWING ASPHALT LF	
0010	1290+84	LT	15	DRIVEWAY
0010	1291+02	ROADWAY	30	TRIPLE PIPE
0010	1292+28	ROADWAY	34	TRIPLE PIPE
0010	1330+49	ROADWAY	22	SINGLE PIPE
0010	1331+54	ROADWAY	22	SINGLE PIPE
0010	1496+43	LT	18	DRIVEWAY
0010	1497+15	RT	12	DRIVEWAY
TOTAL 0010			153	

CATEGORY	STATION	LOCATION	SPV.0035.01
			SPECIAL (01. BACKFILL SLURRY) CY
0010	1291+52	PIPE	7
0010	1291+65	PIPE	7
0010	1291+78	PIPE	7
TOTAL 0010			22


CATEGORY	STATION TO	STATION	LOCATION	645.0140	SPV.0180.01
				GEOTEXTILE TYPE SAS SY	SPECIAL (01. SEALING TOP OF PIPE AREA) SY
0010	1291+52 -	---	PIPE - 7 JOINTS	---	26
0010	1291+65 -	---	PIPE - 7 JOINTS	---	26
0010	1291+78 -	---	PIPE - 7 JOINTS	---	26
0010	1291+42 -	1291+87	ROADWAY	210	---
TOTAL 0010				210	79



BENCH MARKS				
NO.	STATION	OFFSET	DESCRIPTION	ELEV.
1	1291+17.56	76.67' LT	SPIKE	965.12'
2	1292+83.71	58.15' RT	2POL NAL	961.47'


CONTROL POINTS						
NO.	DESCRIPTION	STATION	OFFSET	NORTHING	EASTING	ELEV.
1	3/4" IRON ROD	1291+16.02	40.31' RT	400,674.82	636,707.24	961.27'
2	3/4" IRON ROD	1292+92.03	31.32' LT	400,854.92	636,767.87	961.18'



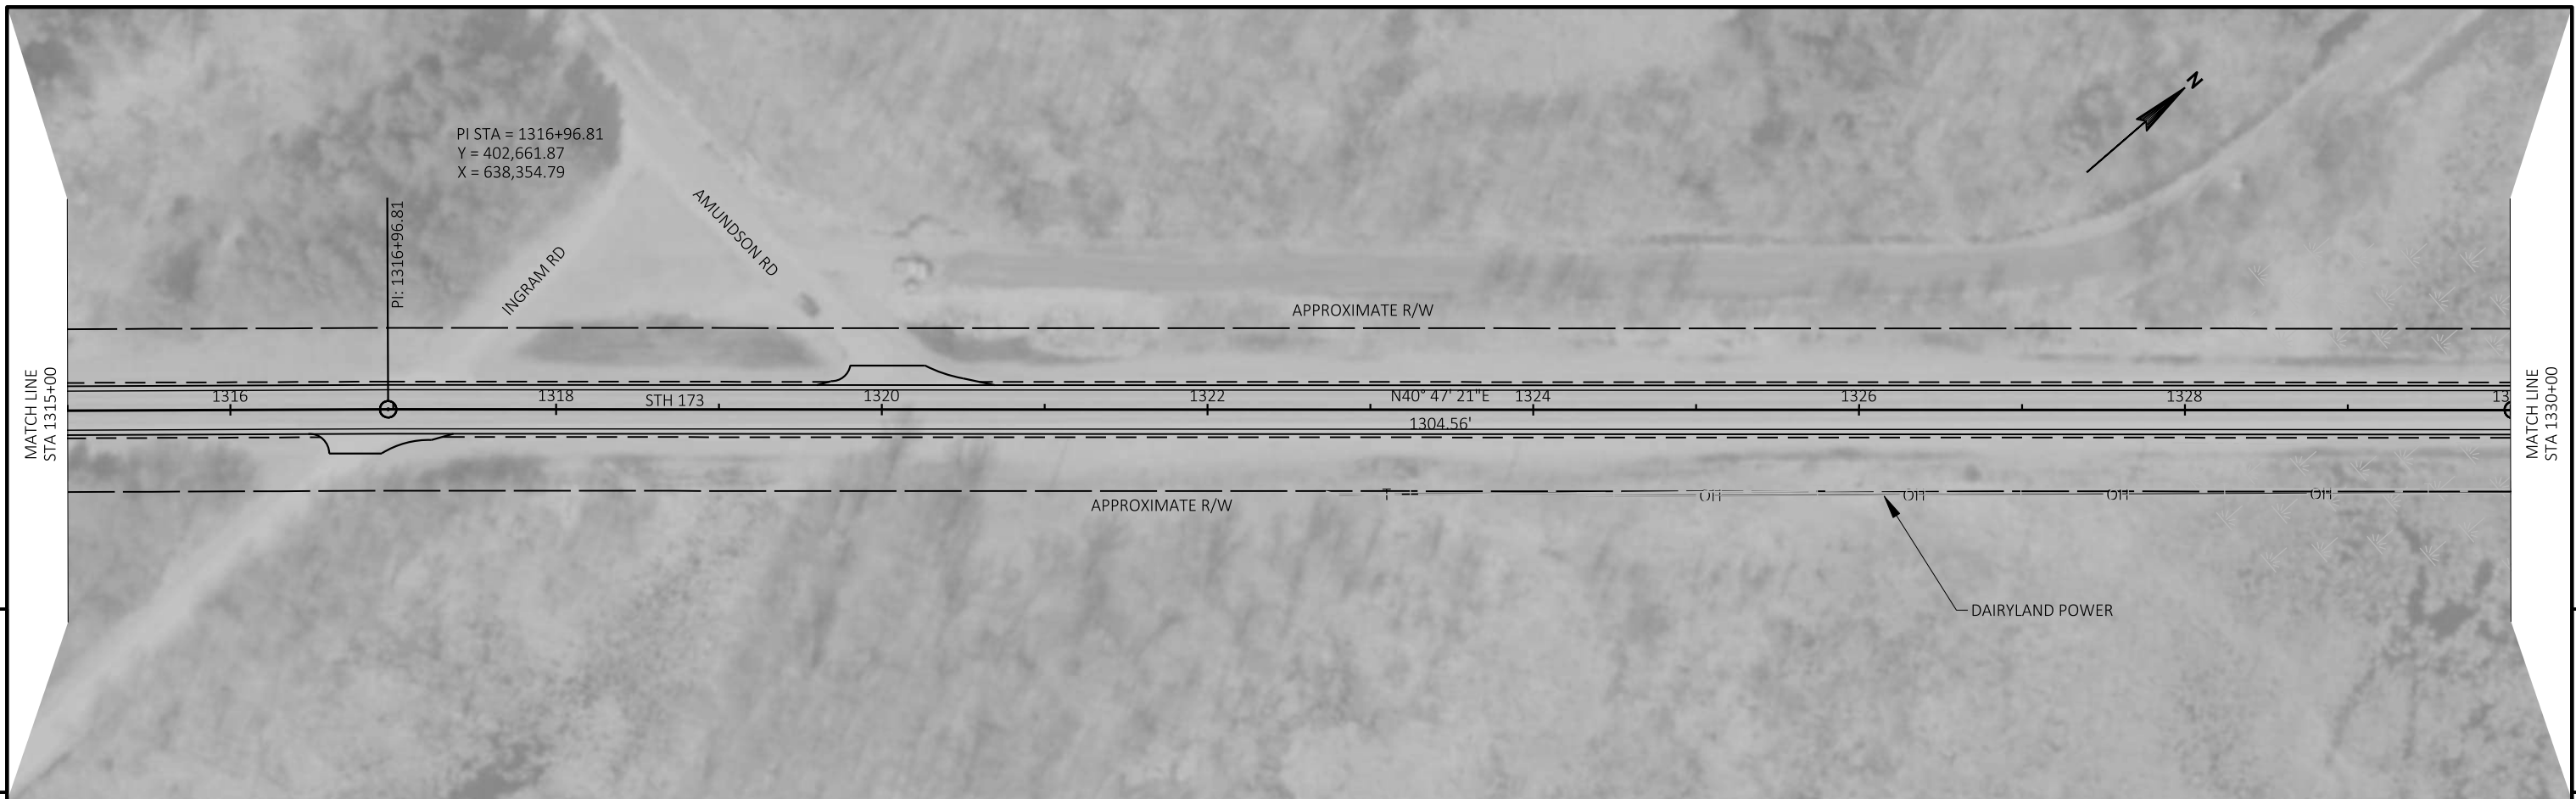

5


5

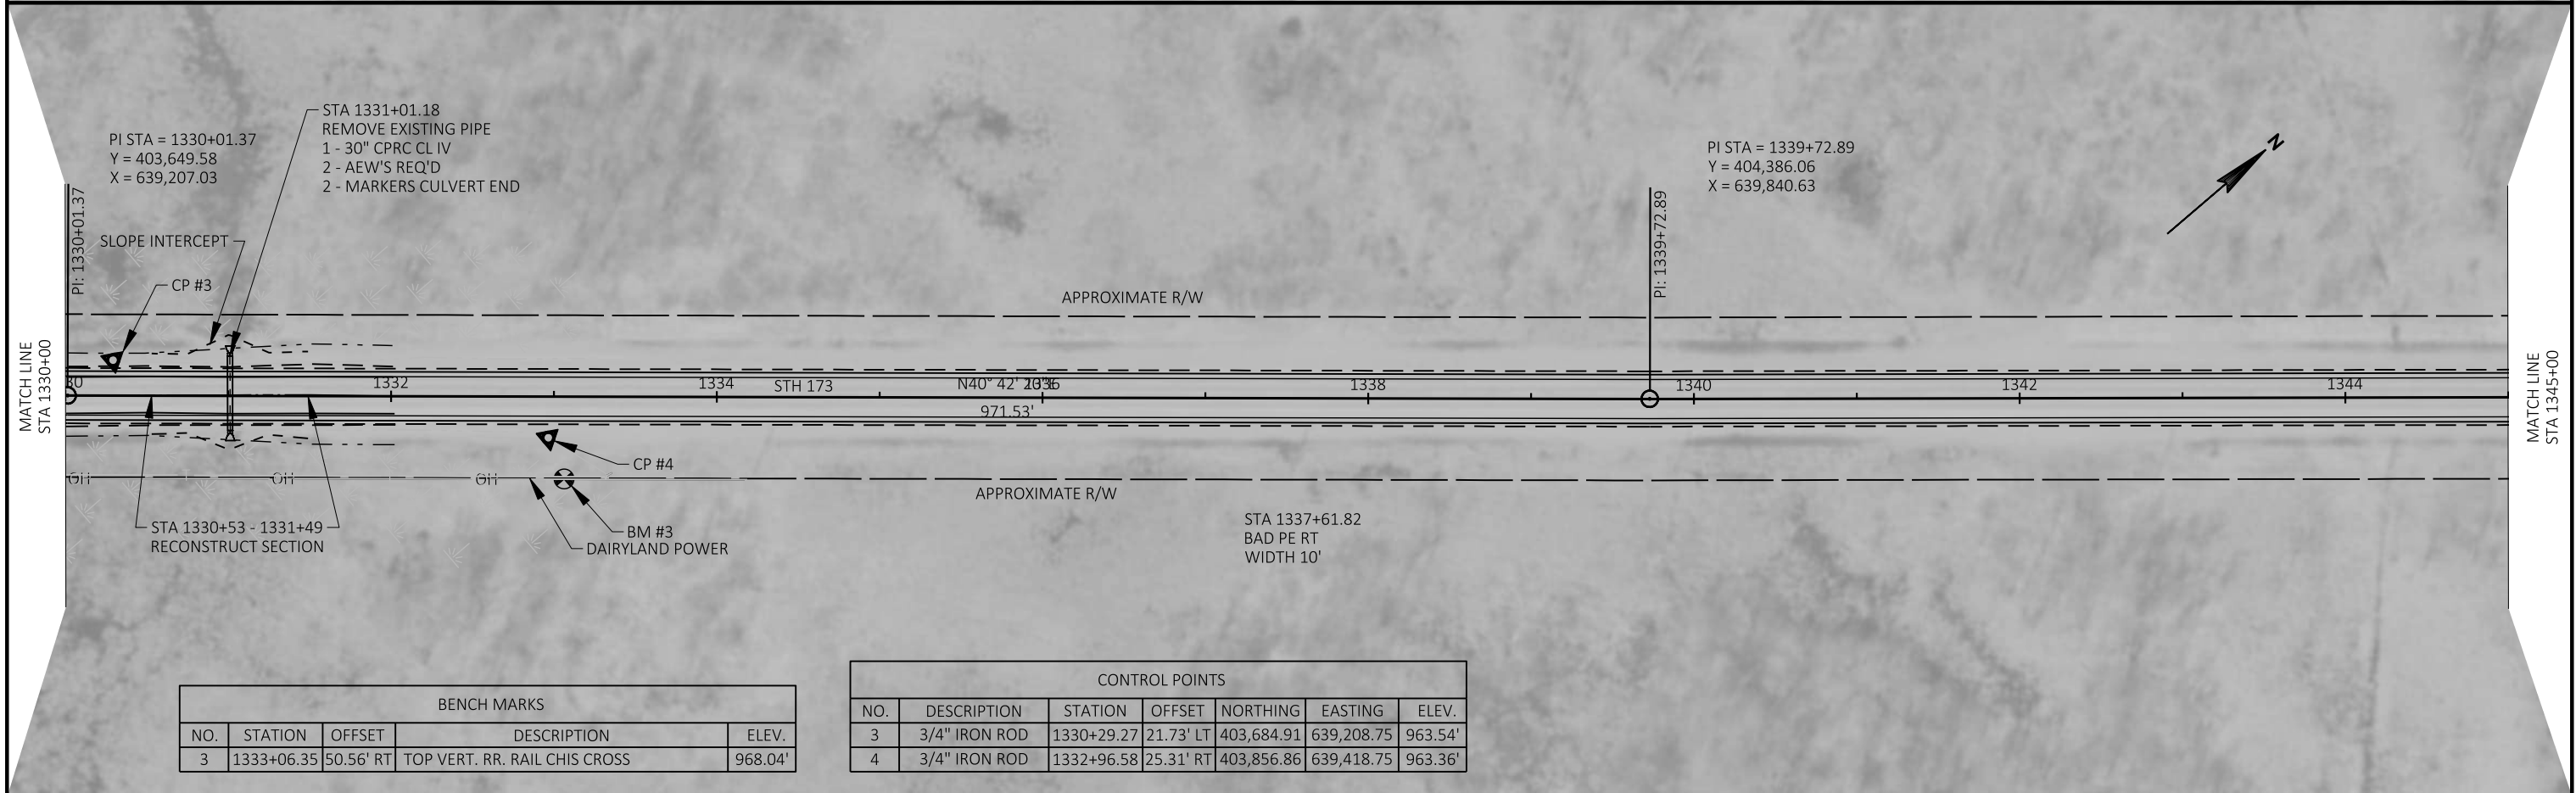

BENCH MARKS				
NO.	STATION	OFFSET	DESCRIPTION	ELEV.
3	1333+06.35	50.56' RT	TOP VERT. RR. RAIL CHIS CROSS	968.04'


CONTROL POINTS						
NO.	DESCRIPTION	STATION	OFFSET	NORTHING	EASTING	ELEV.
3	3/4" IRON ROD	1330+29.27	21.73' LT	403,684.91	639,208.75	963.54'
4	3/4" IRON ROD	1332+96.58	25.31' RT	403,856.86	639,418.75	963.36'

PROJECT NO: 7020-00-71 HWY: STH 173 COUNTY: WOOD PLAN SHEET E


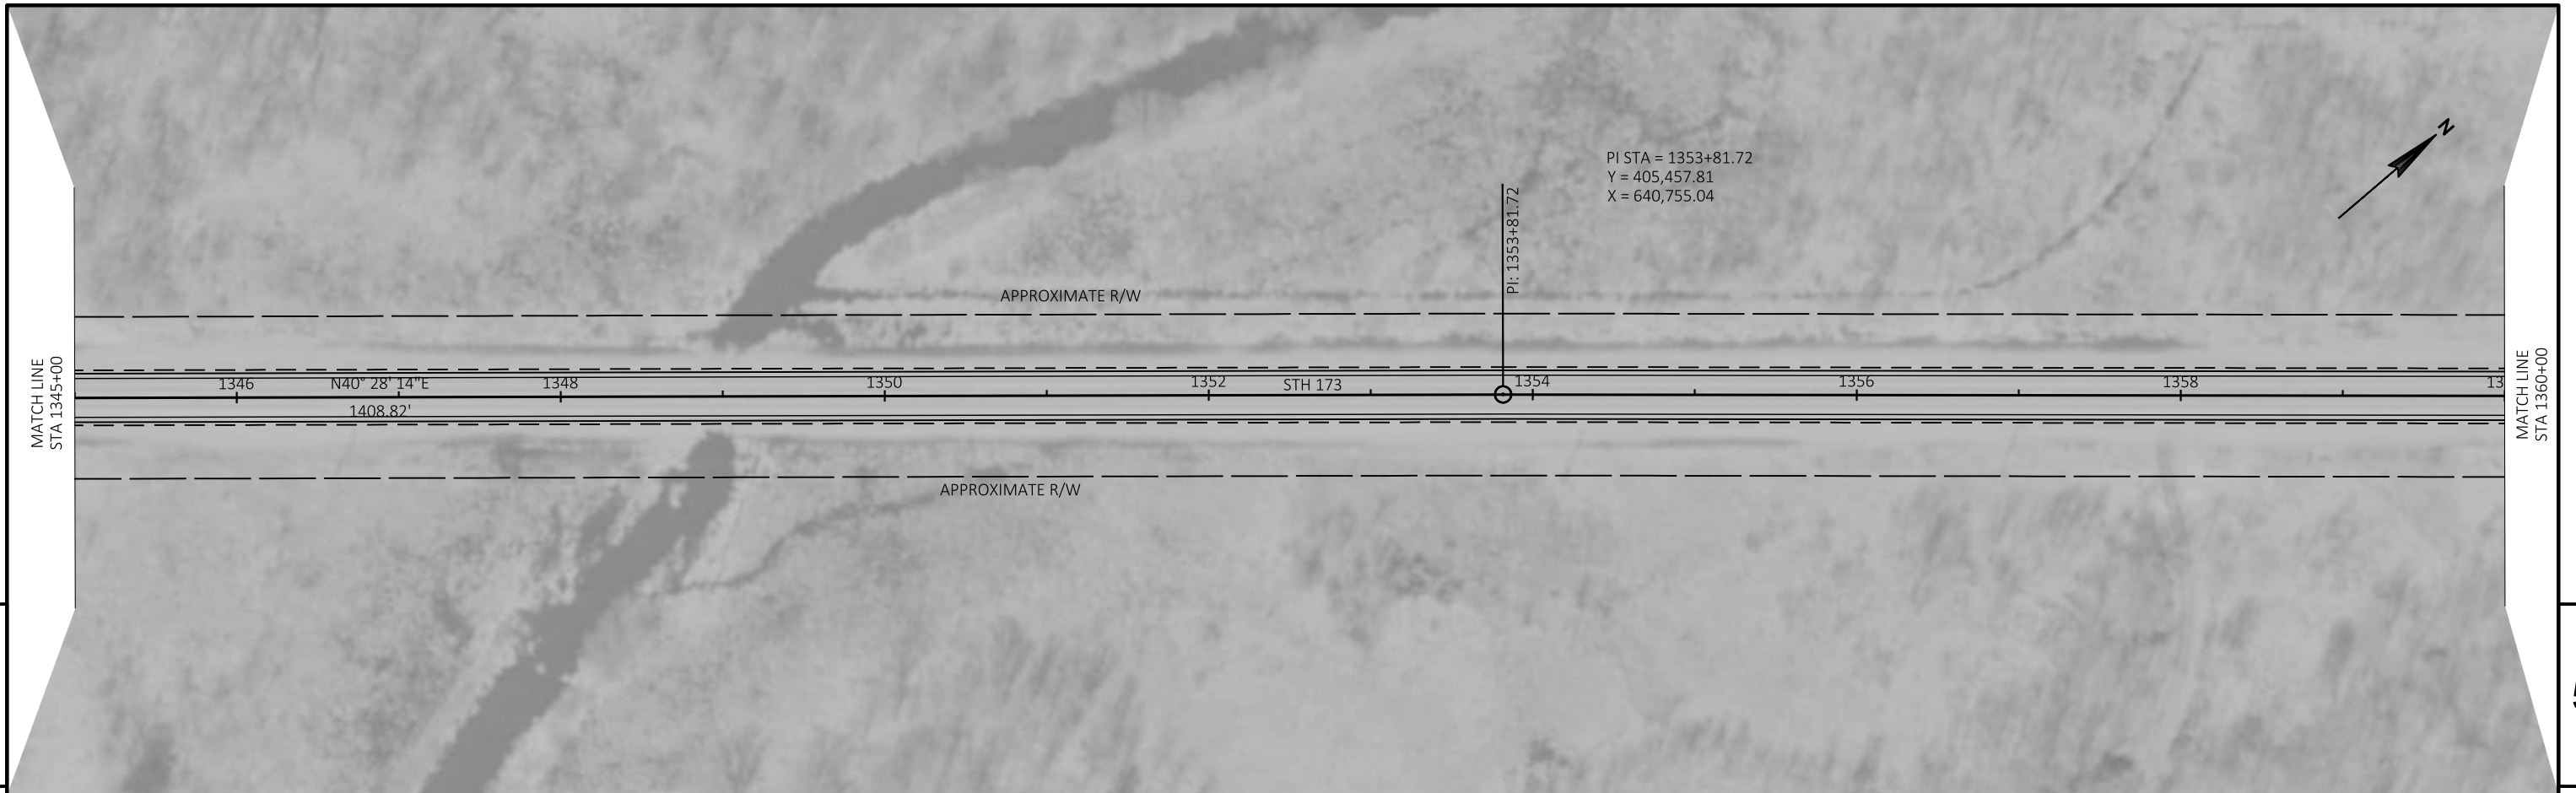


5



5

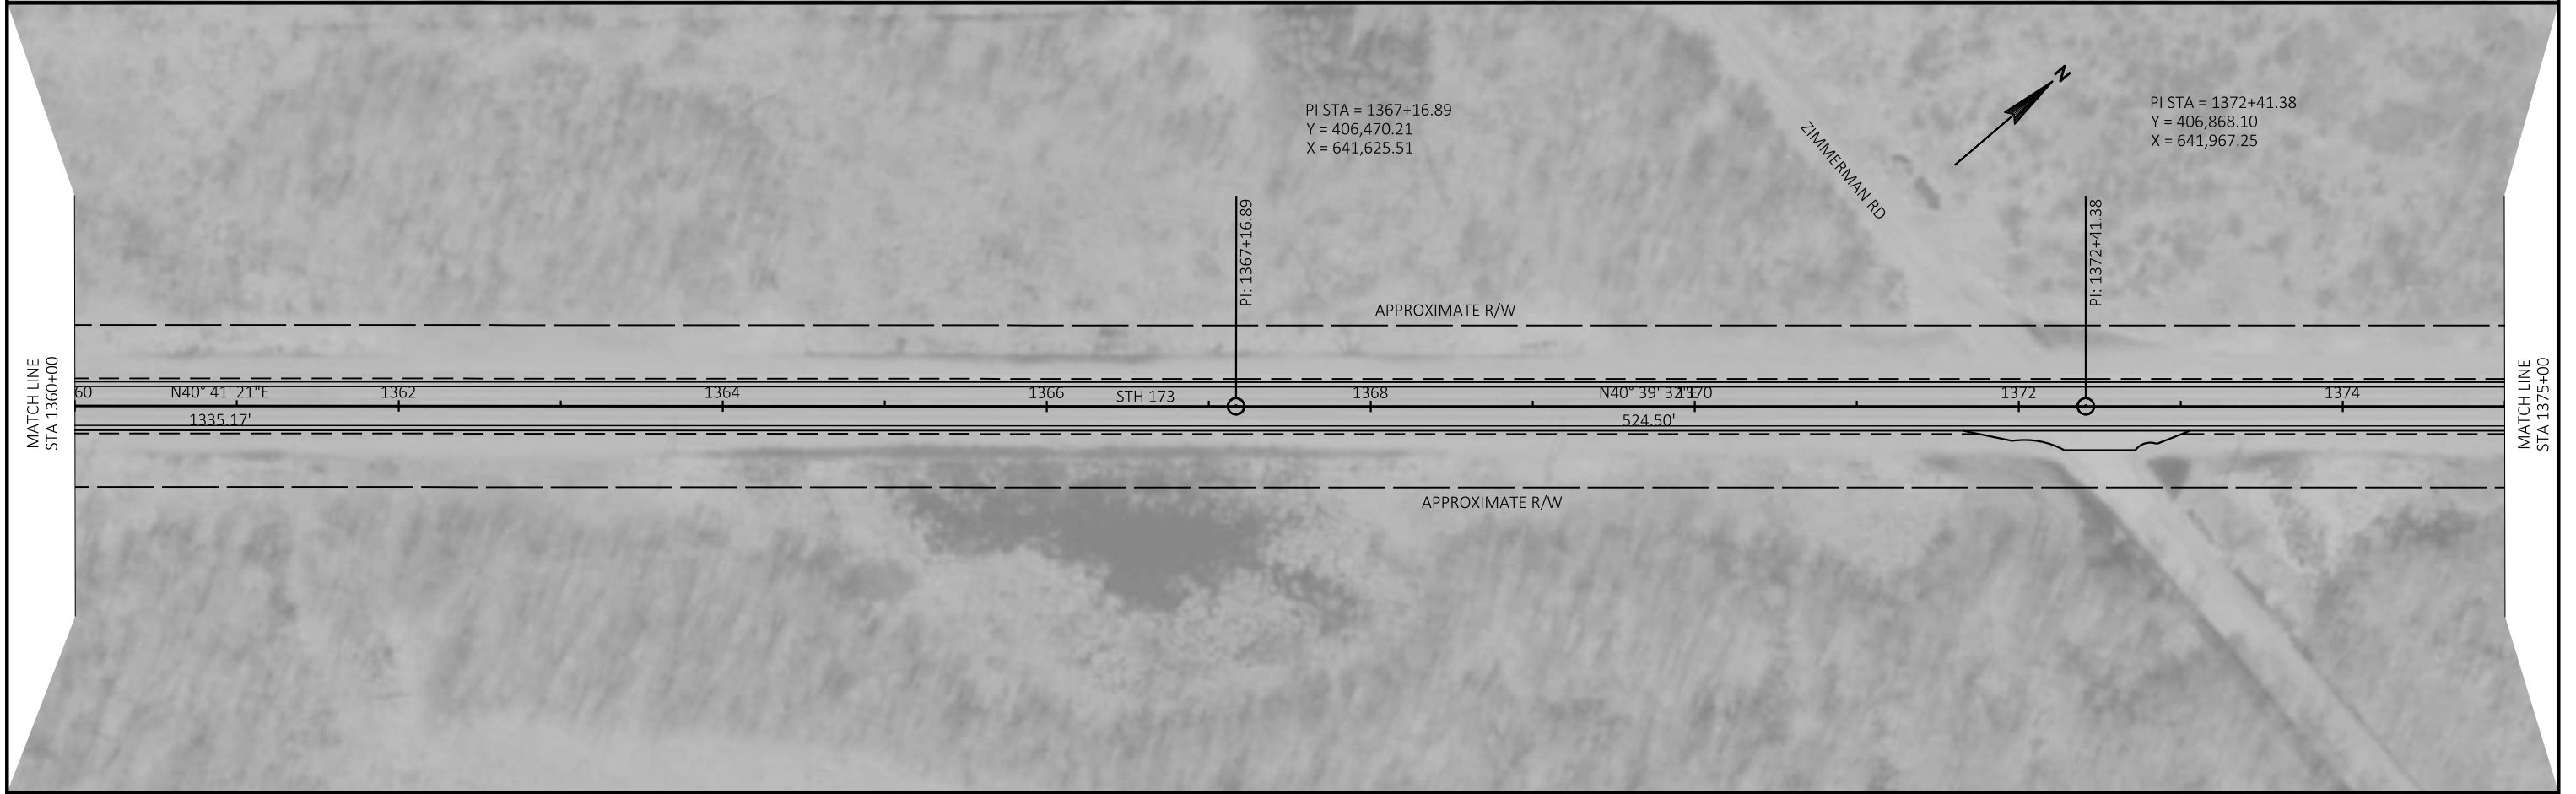

PROJECT NO: 7020-00-71	HWY: STH 173	COUNTY: WOOD	PLAN	SHEET	E
------------------------	--------------	--------------	------	-------	----------

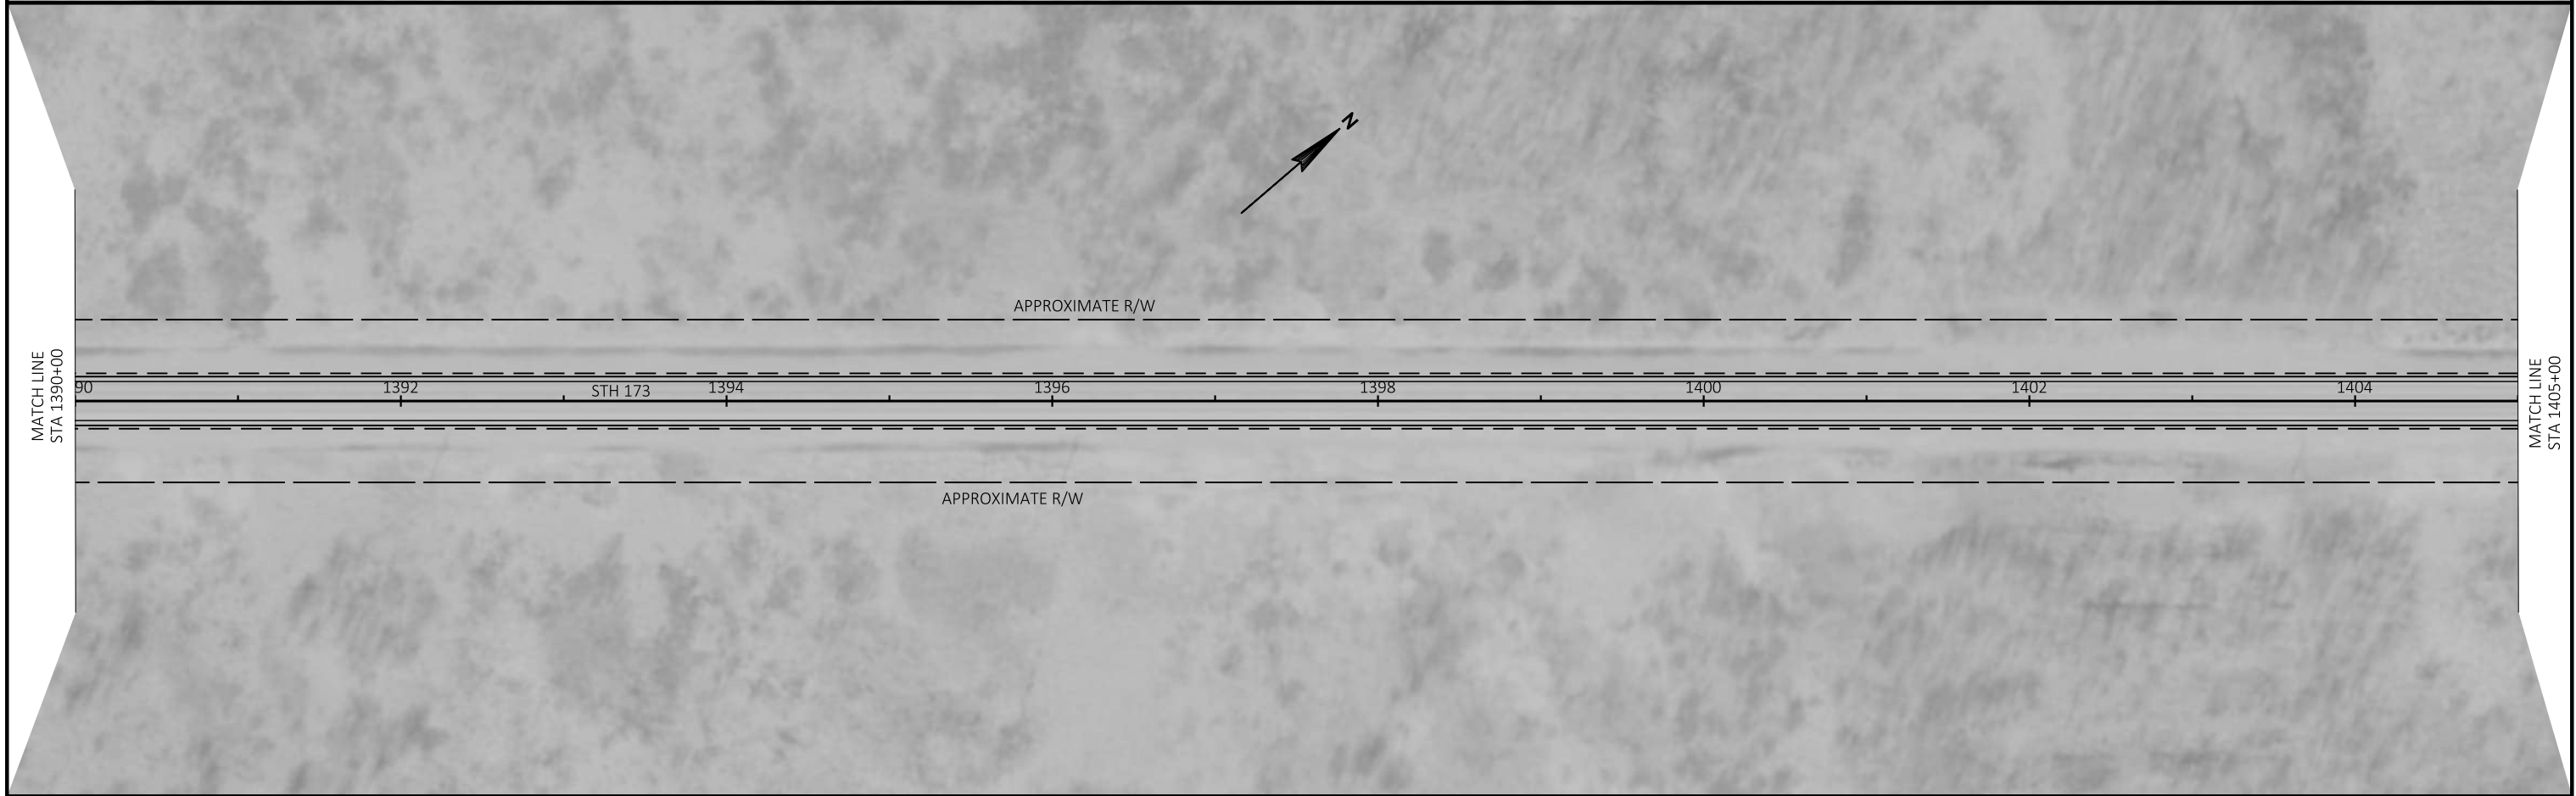



PROJECT NO: 7020-00-71	HWY: STH 173	COUNTY: WOOD	PLAN	SHEET	E
------------------------	--------------	--------------	------	-------	----------




PROJECT NO: 7020-00-71	HWY: STH 173	COUNTY: WOOD	PLAN	SHEET	E
------------------------	--------------	--------------	------	-------	----------



PROJECT NO: 7020-00-71	HWY: STH 173	COUNTY: WOOD	PLAN	SHEET	E
------------------------	--------------	--------------	------	-------	----------

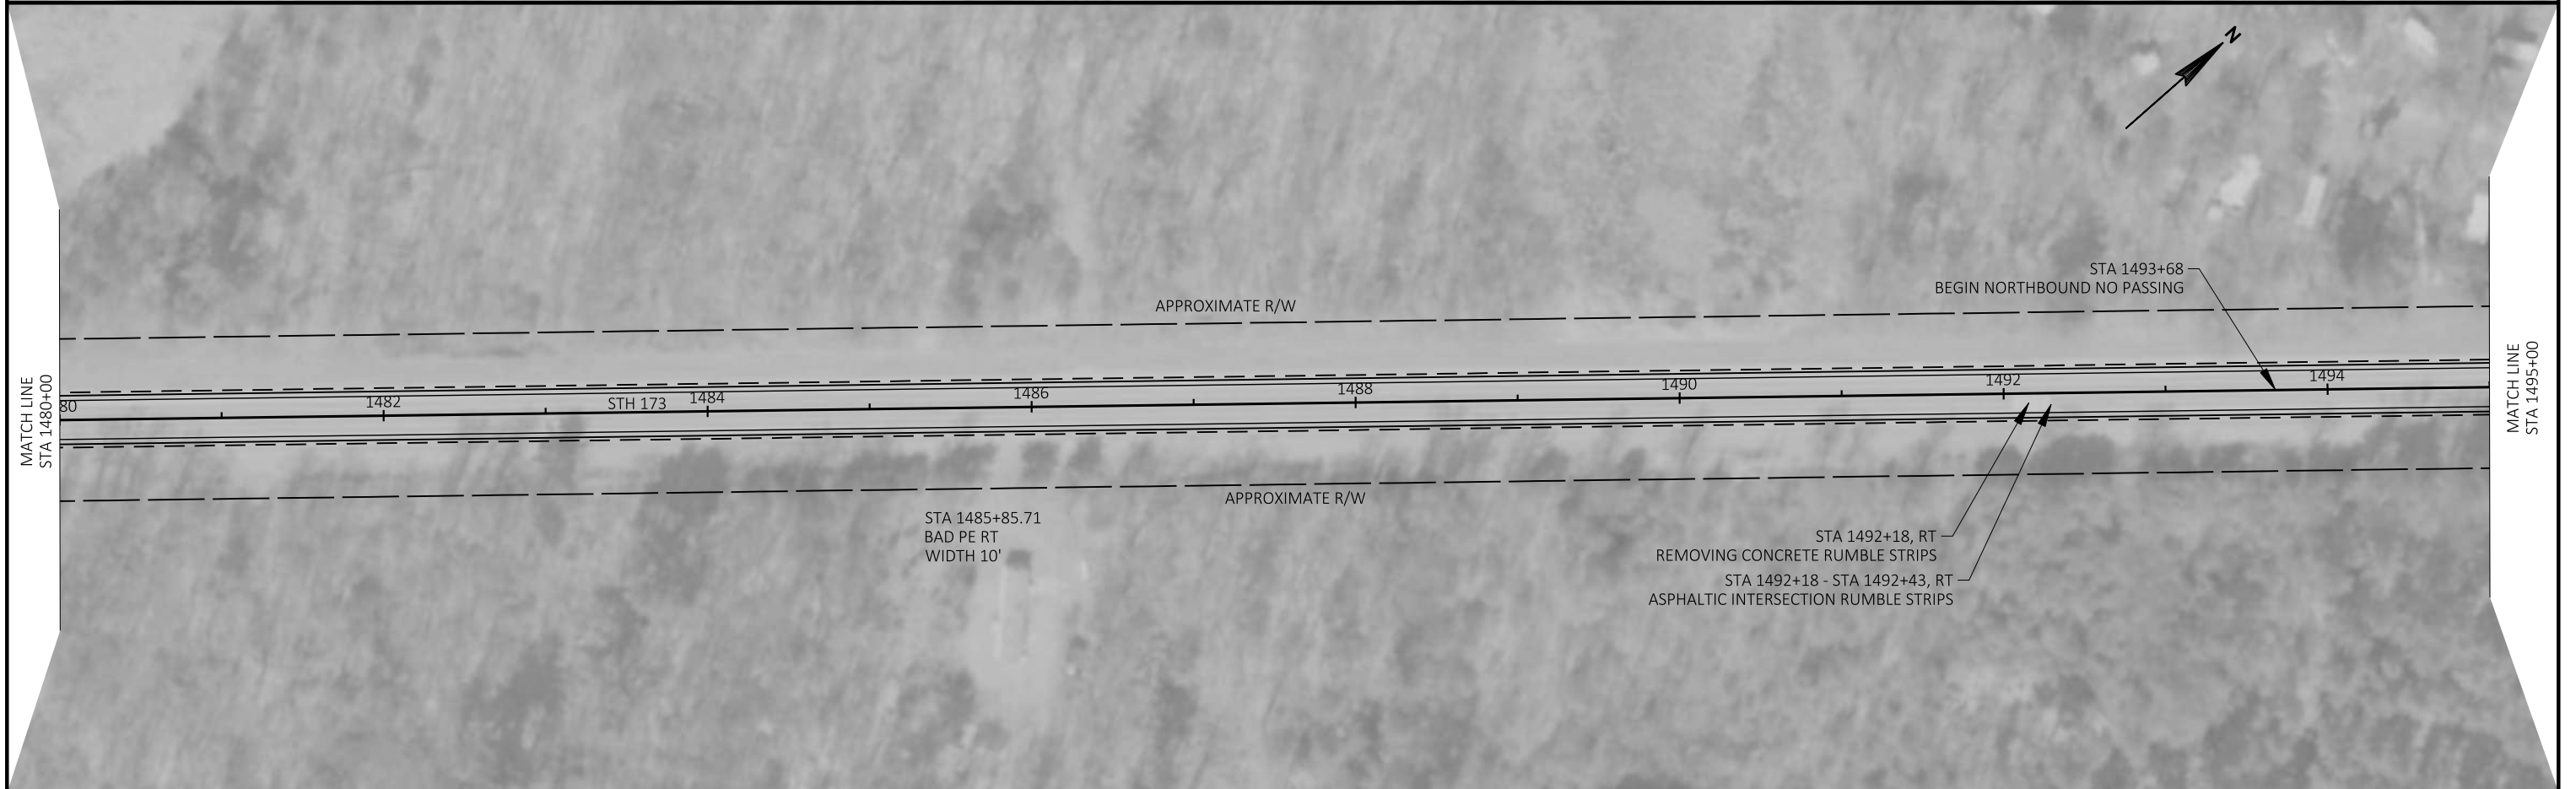

PROJECT NO: 7020-00-71	HWY: STH 173	COUNTY: WOOD	PLAN	SHEET	E
------------------------	--------------	--------------	------	-------	----------

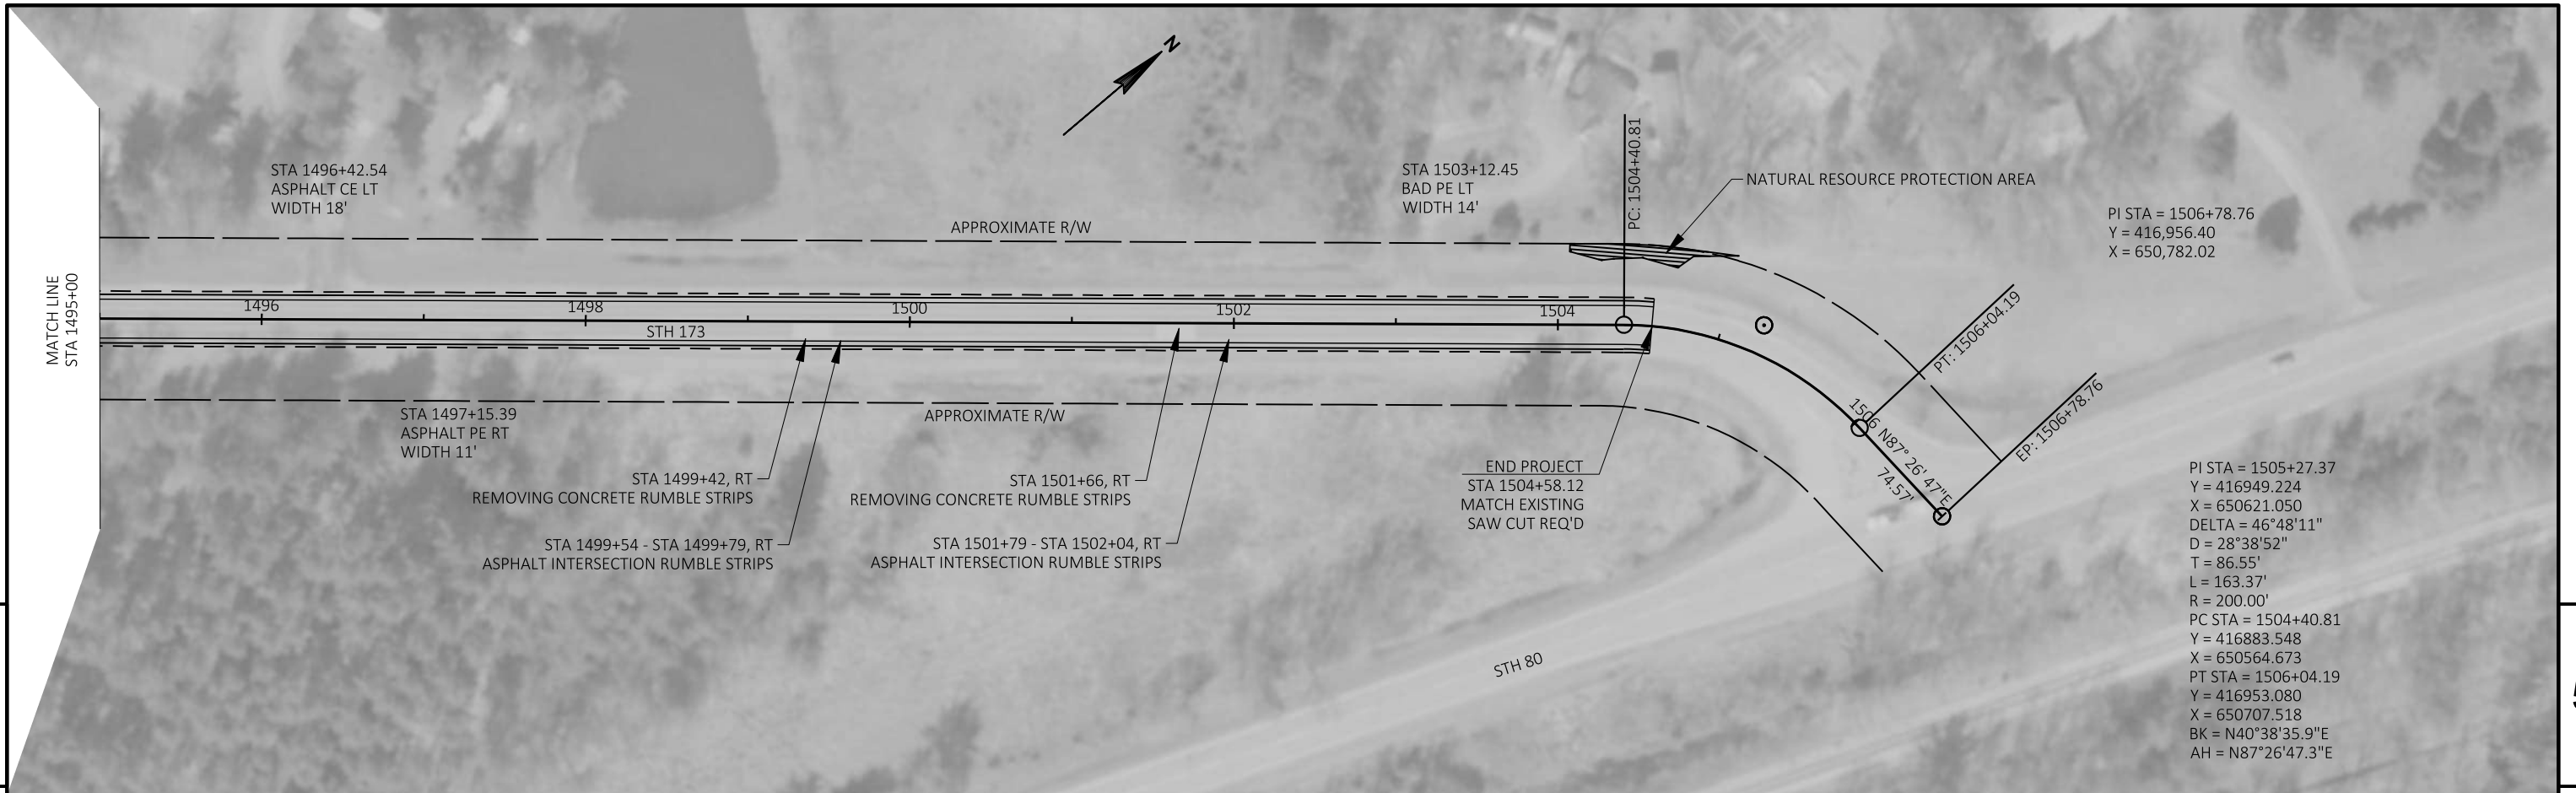

5


5

THIS FRAME INTENTIONALLY LEFT BLANK


PROJECT NO: 7020-00-71	HWY: STH 173	COUNTY: WOOD	PLAN	SHEET	E
------------------------	--------------	--------------	------	-------	---

Standard Detail Drawing List

08E09-06	SILT FENCE
08E11-02	TURBIDITY BARRIER
08E15-01	CULVERT PIPE CHECK
08F01-11	APRON ENDWALLS FOR CULVERT PIPE
08F04-07	JOINT TIES FOR CONCRETE PIPE AND CONCRETE COLLAR DETAIL
13A08-01	ASPHALTIC RUMBLE STRIPS AT INTERSECTION
13A10-02A	2-LANE RURAL SHOULDER RUMBLE STRIP, MILLING
13A10-02B	2-LANE RURAL SHOULDER RUMBLE STRIP, MILLING
13C19-03	HMA LONGITUDINAL JOINTS
14B29-01	SAFETY EDGE
14B42-07A	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-07B	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-07C	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-07D	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B44-04A	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04B	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04C	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B53-01A	SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)
14B53-01B	SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)
14B53-01C	SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)
14B53-01D	SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)
14B53-01E	SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)
14B53-01F	SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)
14B53-01G	SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)
14B53-01H	SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)
14B53-01I	SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)
15A03-02A	FLEXIBLE MARKER POST FOR CULVERT END
15A03-02B	FLEXIBLE MARKER POST FOR CULVERT END
15C02-08A	BARRICADES AND SIGNS FOR MAINLINE CLOSURES
15C02-08B	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
15C02-08C	DETOUR SIGNING FOR MAINLINE CLOSURES
15C03-05	BARRICADES AND SIGNS FOR SIDEROAD CLOSURES
15C04-05	TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45 M.P.H. OR GREATER TWO-WAY UNDIVIDED ROAD OPEN TO TRAFFIC
15C08-20A	LONGITUDINAL MARKING (MAINLINE)
15C11-09B	CHANNELIZING DEVICES DRUMS, CONES, BARRICADES AND VERTICAL PANELS
15C12-07	TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION
15C19-06A	MOVING PAVEMENT MARKING OPERATION TWO-LANE TWO-WAY ROADWAY
15C35-04A	PAVEMENT MARKING (INTERSECTIONS)
15D43-02	TRAFFIC CONTROL, SHORT DURATION MOBILE OPERATIONS
15D44-02	TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACES
15D45-03	TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH LOOSE GRAVEL
15D51-01	TRAFFIC CONTROL, MOBILE OPERATIONS ON AN UNDIVIDED ROADWAY



PLAN VIEW
TYPICAL APPLICATION OF SILT FENCE




SITUATION 1 SITUATION 2
PLAN VIEW
SILT FENCE AT MEDIAN SURFACE DRAINS

GENERAL NOTES


DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

- ① HORIZONTAL BRACE REQUIRED WITH 2" X 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POSTS.
- ② FOR MANUAL INSTALLATIONS THE TRENCH SHALL BE A MINIMUM OF 4" WIDE & 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC. FOLD MATERIAL TO FIT TRENCH AND BACKFILL & COMPACT TRENCH WITH EXCAVATED SOIL.
- ③ WOOD POSTS SHALL BE A MINIMUM SIZE OF 1 1/8" X 1 1/8" OF OAK OR HICKORY.
- ④ SILT FENCE TO EXTEND ACROSS THE TOP OF THE PIPE.
- ⑤ CONSTRUCT SILT FENCE FROM A CONTINUOUS ROLL IF POSSIBLE BY CUTTING LENGTHS TO AVOID JOINTS. IF A JOINT IS NECESSARY USE ONE OF THE FOLLOWING TWO METHODS; A) OVERLAP THE END POSTS AND TWIST, OR ROTATE, AT LEAST 180 DEGREES, B) HOOK THE END OF EACH SILT FENCE LENGTH.




TRENCH DETAIL

NOTE: ADDITIONAL POST DEPTH OR TIE BACKS MAY BE REQUIRED IN UNSTABLE SOILS




SILT FENCE

* NOTE: 8'-0" POST SPACING ALLOWED IF A WOVEN GEOTEXTILE FABRIC IS USED.



JOINING TWO LENGTHS OF SILT FENCE ⑤



SILT FENCE TIE BACK
(WHEN REQUIRED BY THE ENGINEER)

SILT FENCE


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED

4-29-05
DATE


FHWA

/S/ Beth Cannestra
CHIEF ROADWAY DEVELOPMENT ENGINEER




SECTION B - B

**TURBIDITY BARRIER - FLOAT ALTERNATIVE
CAUTION - SEE NOTE 6**




PLAN VIEW



SECTION A - A

TURBIDITY BARRIER - STANDARD POST INSTALLATION



PLAN VIEW


TURBIDITY BARRIER PLACEMENT DETAILS

GENERAL NOTES


DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

TURBIDITY BARRIER MAY BE REMOVED AT THE ENGINEERS DISCRETION, WHEN PERMANENT EROSION CONTROL MEASURES HAVE BEEN ESTABLISHED.

- ① DRIVEN STEEL POSTS, PIPES, OR CHANNELS. LENGTH SHALL BE SUFFICIENT TO SECURELY SUPPORT BARRIER AT HIGH WATER ELEVATIONS.
- ② SAND BAGS TO BE USED AS ADDITIONAL BALLAST WHEN ORDERED BY THE ENGINEER TO MEET ADVERSE FIELD CONDITIONS. SPACE AS APPROPRIATE FOR SITE CONDITIONS.
- ③ WHEN BARRIER HEIGHT "H" EXCEEDS 8 FEET, POST SPACING MAY NEED TO BE DECREASED.
- ④ IN WATERWAYS SUBJECT TO FLUCTUATING WATER ELEVATIONS, PROVISIONS SHOULD BE MADE TO ALLOW THE WATER TO EQUALIZE ON EACH SIDE OF THE BARRIER. THIS MAY BE ACCOMPLISHED BY LEAVING A PORTION OF THE BARRIER OPEN ON THE UPSTREAM END.
- ⑤ ESTIMATED HIGH WATER ELEVATION DURING CONSTRUCTION PERIOD. MINIMUM BARRIER HEIGHT SHALL BE 2' GREATER THAN EITHER THE Q2 ELEVATION OR THE ESTIMATED HIGH WATER ELEVATION DURING CONSTRUCTION, WHICHEVER IS GREATER.
- ⑥ FLOAT ALTERNATIVE WILL ONLY BE ALLOWED WITH WRITTEN APPROVAL OF THE ENGINEER, AND IS MEANT FOR LOCATIONS WHERE BEDROCK PREVENTS THE INSTALLATION OF POSTS.
- ⑦ ALLOW SUFFICIENT SLACK VERTICALLY AND HORIZONTALLY SO THAT SEDIMENT BUILD UP WILL NOT SEPARATE OR LOWER THE TURBIDITY BARRIER.
- ⑧ USE AS DIRECTED BY COAST GUARD OR DNR PERMIT WHEN WORKING IN NAVIGABLE WATERWAYS.



PLAN VIEW



SECTION C - C


**TURBIDITY BARRIER DETAIL SHOWING
TYPICAL PLACEMENT AT STRUCTURES**

TURBIDITY BARRIER


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
6/4/02 DATE /S/ Beth Cannestra
DATE CHIEF ROADWAY DEVELOPMENT
ENGINEER

FHWA



END VIEW



SIDE VIEW

CULVERT PIPE CHECK
 (INSTALL ON INLET END ONLY)


CULVERT PIPE CHECK	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2019 DATE	/S/ Daniel Schave EROSION CONTROL ENGINEER
<small>FHWA</small>	

METAL APRON ENDWALLS											
PIPE DIA. (IN.)	MIN. THICK. (Inches)		DIMENSIONS (Inches)							APPROX. SLOPE	BODY
	STEEL	ALUM.	A (±1")	B (MAX.)	H (±1")	L (±1 1/2")	L1	L2	W (±2")		
12	.064	.060	6	6	6	21	12	17 1/2	24	2 1/2 to 1	1 Pc.
15	.064	.060	7	8	6	26	14	21 3/4	30	2 1/2 to 1	1 Pc.
18	.064	.060	8	10	6	31	15	28 1/4	36	2 1/2 to 1	1 Pc.
21	.064	.060	9	12	6	36	18	29 5/8	42	2 1/2 to 1	1 Pc.
24	.064	.075	10	13	6	41	18	37 1/4	48	2 1/2 to 1	1 Pc.
30	.079	.075	12	16	8	51	18	52 1/4	60	2 1/2 to 1	1 Pc.
36	.079	.105	14	19	9	60	24	59 3/4	72	2 1/2 to 1	2 Pc.
42	.109	.105	16	22	11	69	24	75 5/8	84	2 1/2 to 1	2 Pc.
48	.109	.105	18	27	12	78	24	81	90	2 1/4 to 1	3 Pc.
54	.109	.105	18	30	12	84	30	85 1/2	102	2 1/4 to 1	3 Pc.
60	.109x	.105x	18	33	12	87	—	—	114	2 to 1	3 Pc.
66	.109x	.105x	18	36	12	87	—	—	120	2 to 1	3 Pc.
72	.109x	.105x	18	39	12	87	—	—	126	2 to 1	3 Pc.
78	.109x	.105x	18	42	12	87	—	—	132	1 1/2 to 1	3 Pc.
84	.109x	.105x	18	45	12	87	—	—	138	1 1/2 to 1	3 Pc.
90	.109x	.105x	18	37	12	87	—	—	144	1 1/2 to 1	3 Pc.
96	.109x	.105x	18	35	12	87	—	—	150	1 1/2 to 1	3 Pc.


* EXCEPT CENTER PANEL SEE GENERAL NOTES

REINFORCED CONCRETE APRON ENDWALLS									
PIPE DIA. (IN.)	DIMENSIONS (Inches)							APPROX. SLOPE	
	T	A	B	C	D	E	G		
12	2	4	24	48 1/8	72 1/8	24	2	3 to 1	
15	2 1/4	6	27	46	73	30	2 1/4	3 to 1	
18	2 1/2	9	27	46	73	36	2 1/2	3 to 1	
21	2 3/4	9	36	37 1/2	73 1/2	42	2 3/4	3 to 1	
24	3	9 1/2	43 1/2	30	73 1/2	48	3	3 to 1	
27	3 1/4	10 1/2	49 1/2	24	73 1/2	54	3 1/4	3 to 1	
30	3 1/2	12	54	19 3/4	73 1/2	60	3 1/2	3 to 1	
36	4	15	63	34 3/4	97 3/4	72	4	3 to 1	
42	4 1/2	21	63	35	98	78	4 1/2	3 to 1	
48	5	24	72	26	98	84	5	3 to 1	
54	5 1/2	27	65	33 1/4-35	98 1/4-100	90	5 1/2	2 1/2 to 1	
60	6	30-35	60	39	99	96	5	2 to 1	
66	6 1/2	24-30	72-78	21-27	99	102	5 1/2	2 to 1	
72	7	24-36	78	21	99	108	6	2 to 1	
78	7 1/2	24-36	78	21	99	114	6 1/2	2 to 1	
84	8	36	90 1/2	21	111 1/2	120	6 1/2	1 1/2 to 1	
90	8 1/2	41	87 1/2	24	111 1/2	132	6 1/2	1 1/2 to 1	


*MINIMUM
**MAXIMUM




END CORNER PLATES MAY BE FASTENED TO APRON PROPER BY BOLTS, RIVETS, OR RESISTANCE SPOT WELDS WHICH WILL HOLD THE SURFACES TIGHTLY TOGETHER




SIDE ELEVATION
METAL ENDWALLS



PLAN




END VIEW




LONGITUDINAL SECTION
CONCRETE ENDWALLS


1" WIDE, 12 GA. (0.109" THICK) GALVANIZED STRAP WITH STANDARD 6" X 1/2" BAND BOLT AND NUT




ALTERNATE FOR TYPE 1 CONNECTION
END SECTION CONNECTOR STRAP




TYPE 1
FOR 12" THRU 24" CORR. PIPE



TYPE 2
FOR 30" THRU 96" CORR. PIPE



TYPE 3
FOR 42" THRU 96" CORR. PIPE



TYPE 5
ALTERNATE FOR:
ALL SIZES CORRUGATED CIRCULAR PIPE


NOTE: DIMPLED BAND FITS OVER OUTSIDE OF ENDWALL, AND CORRUGATED BAND FITS INSIDE ENDWALL. DIMPLED BAND MAY BE USED WITH HELICALLY CORRUGATED PIPE.

FOR CIRCUMFERENTIALLY CORRUGATED PIPE USE ENDWALL CONNECTION DETAILS 1, 2, 3 OR 5 AS APPLICABLE.

FOR HELICALLY CORRUGATED PIPE USE ENDWALL CONNECTION DETAILS 1, 2 OR 5.

FOR HELICALLY CORRUGATED PIPES WITH TWO CIRCUMFERENTIAL CORRUGATIONS AT EACH END USE ENDWALL CONNECTION DETAILS 1, 2 OR 3.

CONNECTION DETAILS



SECTION A-A

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

CONCRETE CULVERT ENDWALLS MAY NOT BE USED WITH GALVANIZED STEEL OR ALUMINUM CULVERT PIPE OR VICE VERSA. GALVANIZED STEEL OR ALUMINUM ENDWALLS SHALL NORMALLY BE INSTALLED ON CULVERT PIPE OF THE SAME METAL.

ALL THREE PIECE STEEL APRON ENDWALLS FOR 60" DIAMETER PIPE AND LARGER SHALL HAVE 0.109" SIDES AND 0.138" CENTER PANELS. ALL THREE PIECE ALUMINUM APRON ENDWALLS FOR 60" DIAMETER PIPE AND LARGER SHALL HAVE 0.105" SIDES AND 0.134" CENTER PANELS. THE WIDTH OF CENTER PANELS SHALL BE GREATER THAN 20 PERCENT OF THE PIPE PERIMETER.

LAP SEAMS SHALL BE TIGHTLY JOINED BY GALVANIZED RIVETS OR BOLTS FOR STEEL UNITS AND ALUMINUM RIVETS AND BOLTS FOR ALUMINUM UNITS. FOR THE 60" THROUGH 96" DIAMETER APRON ENDWALL SIZES, THE REINFORCED EDGES AND CENTER PANEL SEAMS SHALL BE FURTHER REINFORCED WITH GALVANIZED STEEL OR ALUMINUM STIFFENER ANGLES. THE ANGLES SHALL BE ATTACHED BY GALVANIZED NUTS AND BOLTS FOR STEEL UNITS AND ALUMINUM NUTS AND BOLTS FOR ALUMINUM UNITS.


WHERE TWO OR MORE PIPES WITH APRON ENDWALLS ARE LAID ADJACENT TO EACH OTHER, THEY SHALL BE SEPARATED BY A DISTANCE SUFFICIENT TO PROVIDE A MINIMUM CLEARANCE OF 6 INCHES BETWEEN APRON ENDWALLS.

① FOR PIPE SIZES UP TO 60" DIAMETER, A 180° ROLLED EDGE MAY BE USED INSTEAD OF STEEL ROD REINFORCEMENT. SEE SECTION A-A.

APRON ENDWALLS FOR
CULVERT PIPE


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
11/30/94 /S/ Rory L. Rhinesmith
DATE CHIEF ROADWAY DEVELOPMENT ENGINEER
FHWA

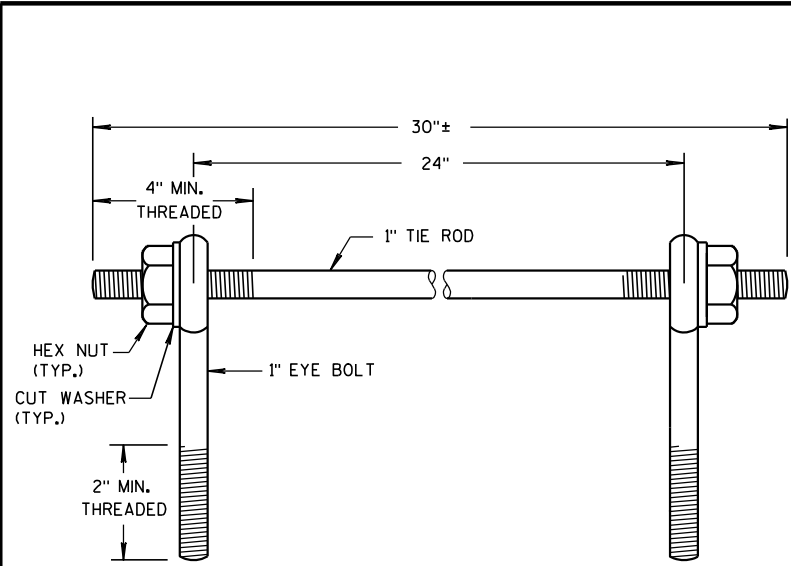

EYE BOLTS AND TIE ROD

EYE BOLT AND TIE ROD ASSEMBLY (ALTERNATE NO. 1)

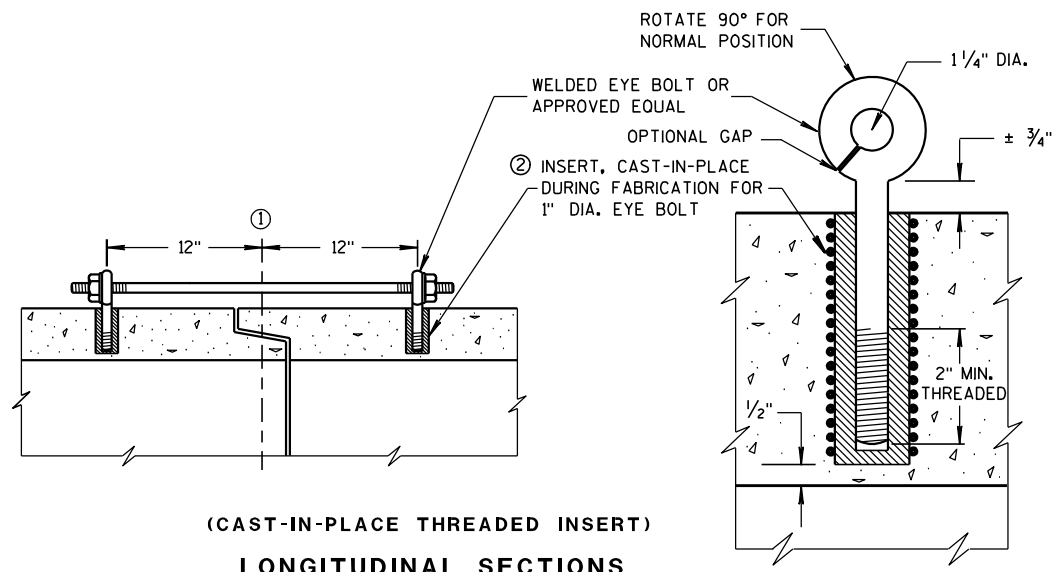

(CAST-IN-PLACE THREADED INSERT)
LONGITUDINAL SECTIONS

GENERAL NOTES


DETAILS OF CONSTRUCTION, MATERIALS, AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

CONCRETE CULVERT AND STORM SEWER PIPE SHALL BE TIED TOGETHER IN THE MANNER ILLUSTRATED BY THIS DETAIL AT LOCATIONS DESIGNATED IN THE STANDARD SPECIFICATIONS AND THE PLAN. THE CONTRACTOR MAY USE EITHER ALTERNATE 1, 2 OR 3 FOR DRAINAGE STRUCTURES. ONLY ALTERNATE 1 AND 3 MAY BE USED FOR CATTLE PASSES, UNLESS OTHERWISE STATED IN THE CONTRACT. THE MATERIALS, FABRICATION AND WORK NECESSARY TO TIE THE PIPE BY THIS DETAIL WILL BE CONSIDERED INCIDENTAL TO THE PIPE AND APRON ENDWALLS IF REQUIRED.


DETAILED DRAWINGS FOR PROPOSED ALTERNATE DESIGNS FOR JOINT TIES SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL.

JOINT TIES TO BE HOT-DIP GALVANIZED PER ASTM A 153.

- ① ϕ OF TONGUE AND GROOVE OR BELL AND SPIGOT JOINTS.
- ② THE INSIDE OF THE THREADED INSERTS SHALL BE CLEAN TO ALLOW THE INSERTION OF THREADED EYE BOLTS.
- ③ HOLES SHALL BE CAST-IN-PLACE OR DRILLED 12 INCHES FROM ϕ OF TONGUE AND GROOVE.
- ④ BOLT PROJECTION INSIDE OF PIPE SHALL NOT EXCEED 2 INCHES.
- ⑤ OPENING TO BE ROD DIAMETER PLUS 1 INCH.
- ⑥ LENGTH ADEQUATE TO EXTEND TO WITHIN $\frac{1}{2}$ INCH OF THE INNER SURFACE OF THE PIPE.

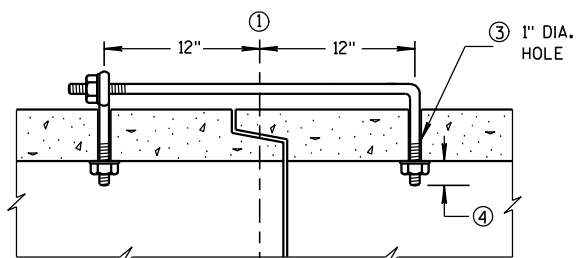

(TONGUE & GROOVE PIPE)

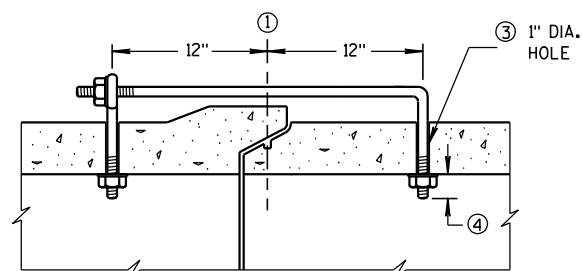

(MODIFIED BELL PIPE)
LONGITUDINAL SECTION


EYE BOLT DIMENSION TABLE

PIPE SIZE	L = LENGTH	
	TONGUE & GROOVE PIPE	MODIFIED BELL PIPE
18" TO 24"	4 1/2"	6 1/4"
30"	5"	7"
36"	5 1/2"	7"
42"	6"	
48"	6 1/2"	
60"	7 1/2"	
66"	8"	


ADJUSTABLE TIE ROD TABLE

PIPE DIAMETER	TIE ROD DIAMETER	D	L1	N
12-60	5/8	5/8	5	1/2
66-84	3/4	3/4	5	1/2
90-108	1	1	7	1 1/6

DIMENSIONS SHOWN ARE IN INCHES




TAPERED PLAIN
RIGHT AND LEFT THREADS
SLEEVE NUTS




PLACEMENT OF (2) CAST-IN-PLACE
INSERTS OR HOLES DURING FABRICATION
FOR PIPE SECTIONS REQUIRING TIE RODS

TRANSVERSE SECTION

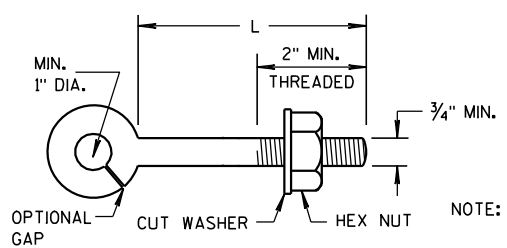


EYE BOLT

NOTE: TWO EYE BOLTS MAY BE USED WITH A 30" LONG THREADED ROD IN LIEU OF THE 90° BENT TIE ROD.




EYE BOLT AND TIE ROD

(JOINT TIES FOR 18" TO 66" DIA. CONCRETE PIPE)
EYE BOLT AND TIE ROD ASSEMBLY (ALTERNATE NO. 2)

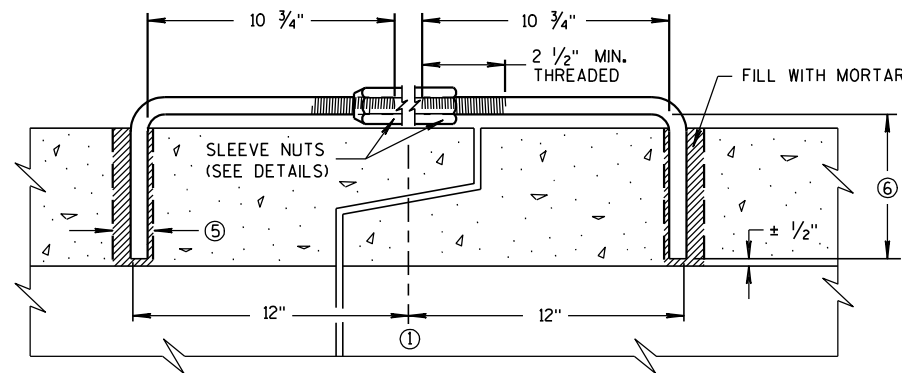

LONGITUDINAL SECTION
(JOINT TIES FOR 12" TO 108" DIA. CONCRETE PIPE)
ADJUSTABLE TIE ROD (ALTERNATE NO. 3)




SECTION A-A
CONCRETE COLLAR DETAIL

JOINT TIES FOR CONCRETE
PIPE AND CONCRETE
COLLAR DETAIL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
6/5/2012 /S/ Jerry H. Zogg
DATE ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA



TRAFFIC LANE RUMBLE STRIP

POSTED SPEED (mph)	DISTANCE TO RUMBLE STRIP		
	DIST. A	DIST. B	DIST. C
55	425'	650'	1000'
50	325'	450'	800'
45	275'	400'	650'
40	225'	①	550'
35	175'	①	475'
≤ 30	125'	①	425'

ARROW SYMBOL (➔) SHOWS DIRECTION OF TRAVEL

**PLAN VIEW
RUMBLE STRIP LOCATION**


- ① ELIMINATE THE MIDDLE SET OF RUMBLE STRIPS.
- ② LOCATE RUMBLE STRIP 200' IN ADVANCE OF W3-1 SIGN AS SHOWN. IF W3-1 IS NOT IN PLACE, USE DISTANCE C.
- ③ TYPICAL VERTICAL VARIATION BETWEEN PEAKS AND VALLEYS WITHIN THE CUT APPROXIMATELY 1/16"
- ④ 12" CLEAR BETWEEN THE SOLID YELLOW LINE AND THE EDGE OF THE RUMBLE.

GENERAL NOTES


CONTRACTOR SHALL CONFIRM RUMBLE STRIP LOCATION WITH THE ENGINEER PRIOR TO INSTALLATION. THE ENGINEER MAY MODIFY THE RUMBLE STRIP LOCATION AS FIELD CONDITIONS DICTATE.

WHEN ASPHALTIC PAVEMENT IS NEW IN THE RUMBLE AREA THE CONTRACTOR SHALL ALLOW THE PAVEMENT TO CURE A MINIMUM OF 7 DAYS PRIOR TO RUMBLE INSTALLATION.

PAVEMENT MARKING AND SIGNING DETAILS AND SPECIFICATIONS ARE PROVIDED ELSEWHERE IN THE CONTRACT.




ELEVATION VIEW



**PLAN VIEW
ASPHALTIC PAVEMENT
MILLED-IN**

ASPHALTIC RUMBLE STRIPS AT INTERSECTION	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED 8/17/2011 DATE	/s/ Jerry H. Zogg ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	

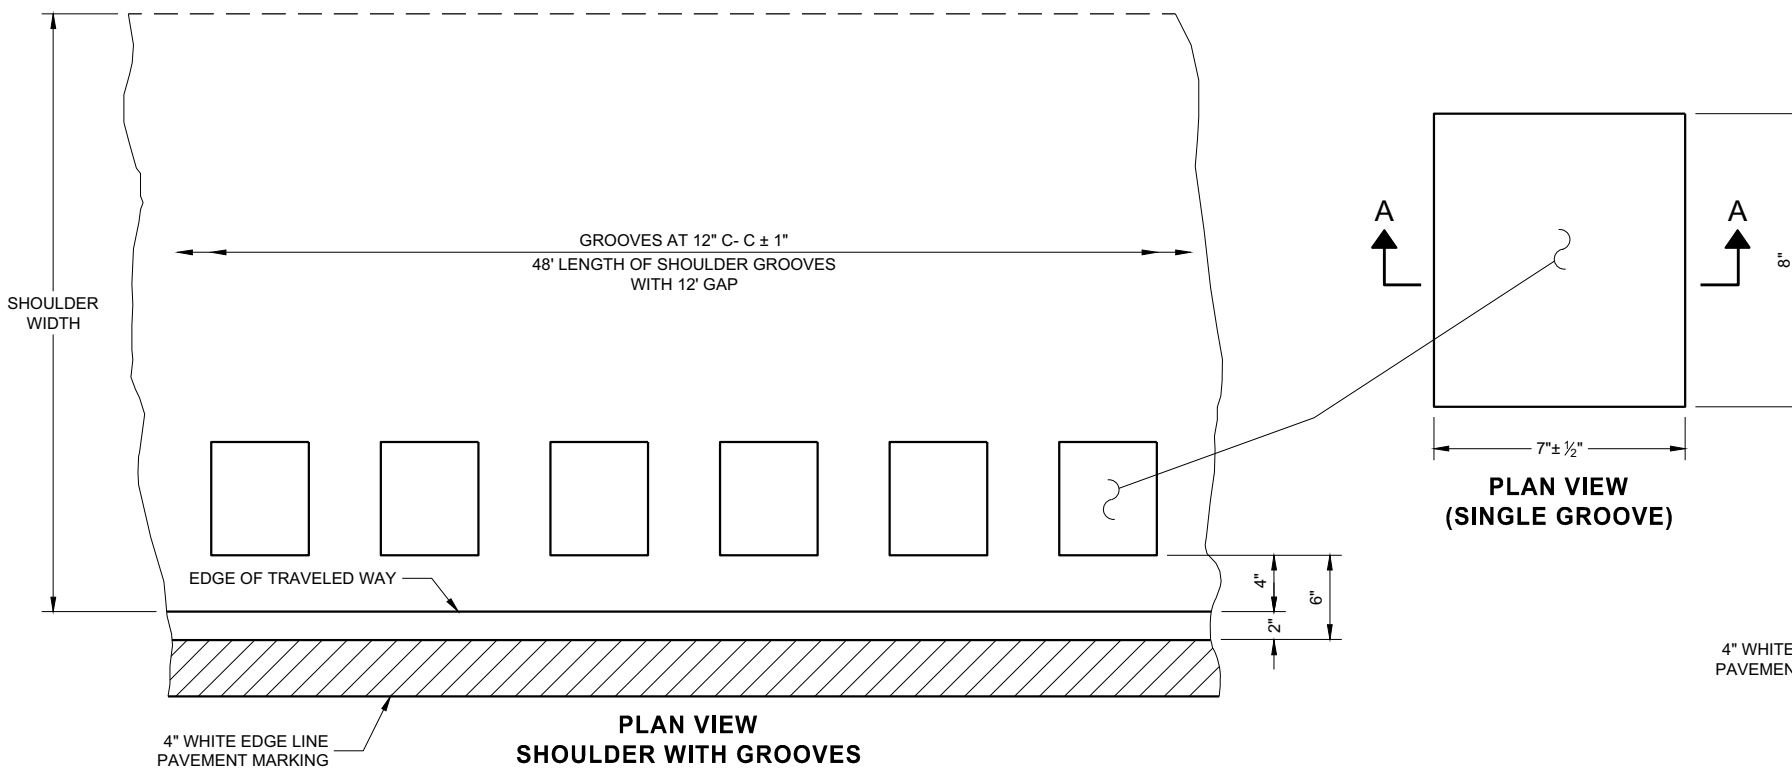


PLACEMENT DETAIL FOR TYPE 1 MILLED RUMBLE STRIP

GENERAL NOTES


DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

DO NOT MILL SHOULDER GROOVES THROUGH ANY INTERSECTION, MARKED CROSSWALK, NON-MOTORIZED PATH CROSSING, OR SNOWMOBILE CROSSING.


- ① SHOULDER GROOVES MAY BE OMITTED IN AREAS WITH HIGH CONCENTRATIONS OF DRIVEWAYS. WHEN DIRECTED BY THE ENGINEER.

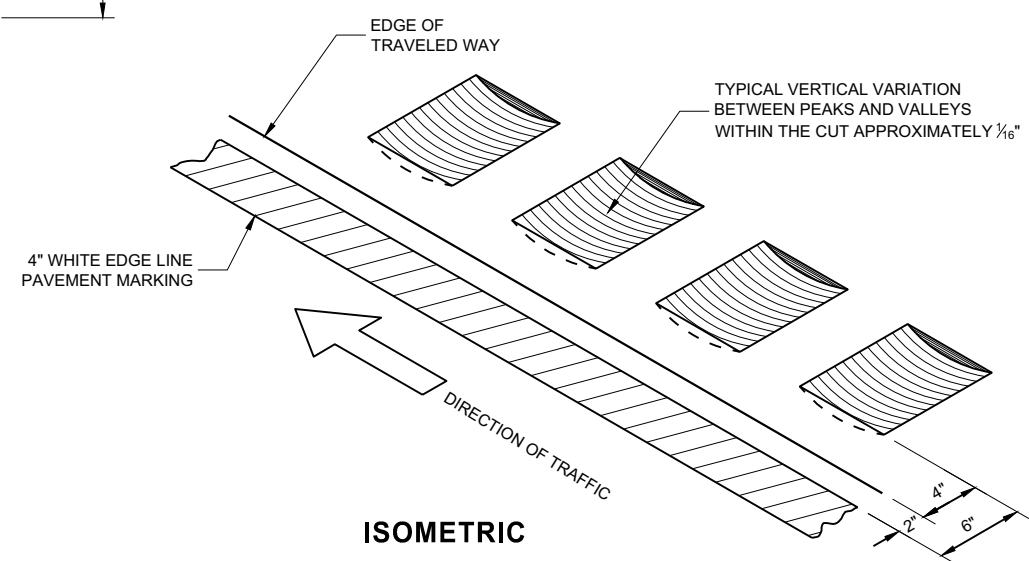

ISOMETRIC

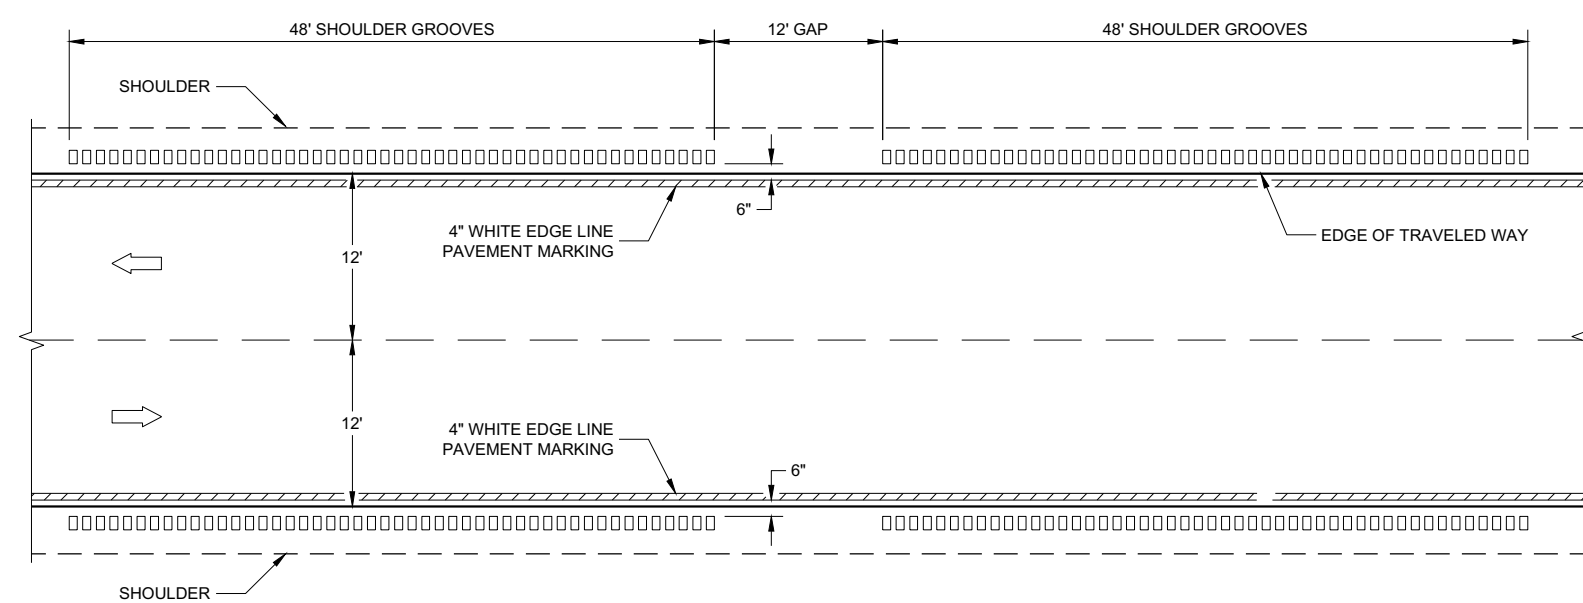


TYPE 1
2 - LANE SHOULDER RUMBLE STRIP

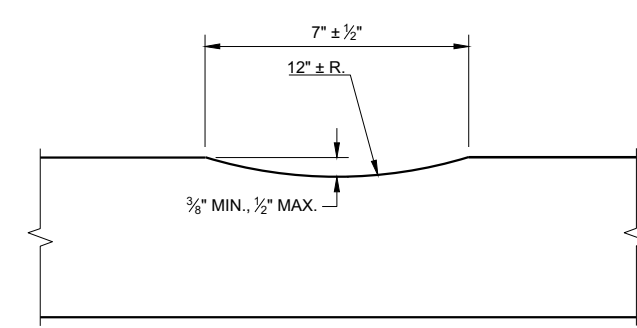


SECTION A - A

**2-LANE RURAL SHOULDER
RUMBLE STRIP, MILLING**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

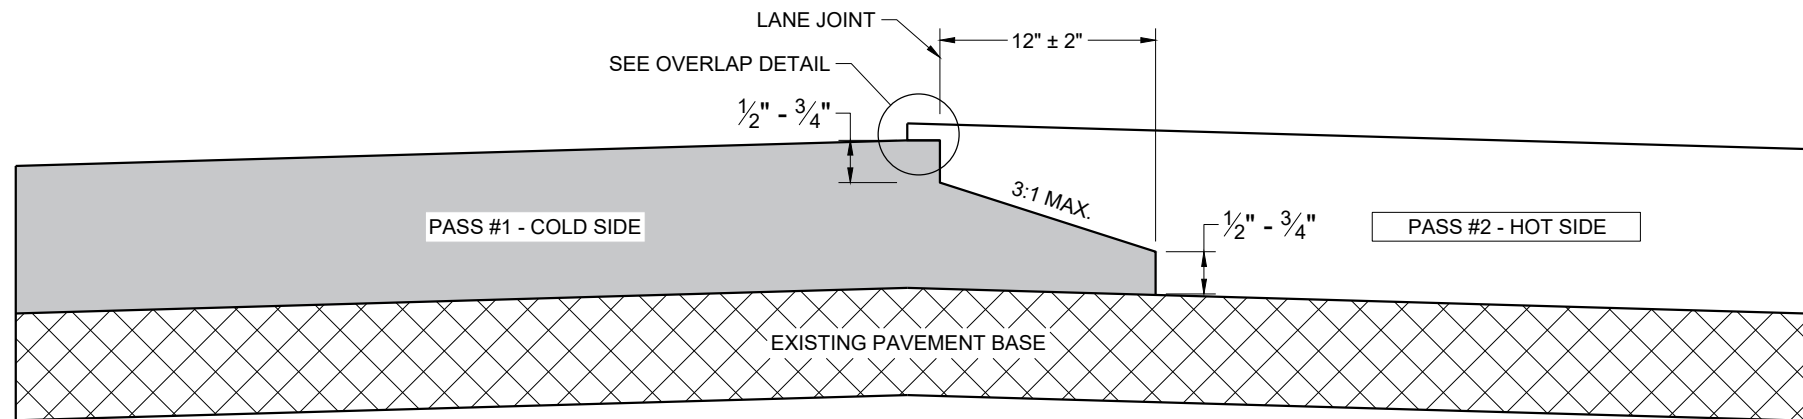

**TYPICAL PAVEMENT CROSS SECTION
NOTCHED WEDGE JOINT**

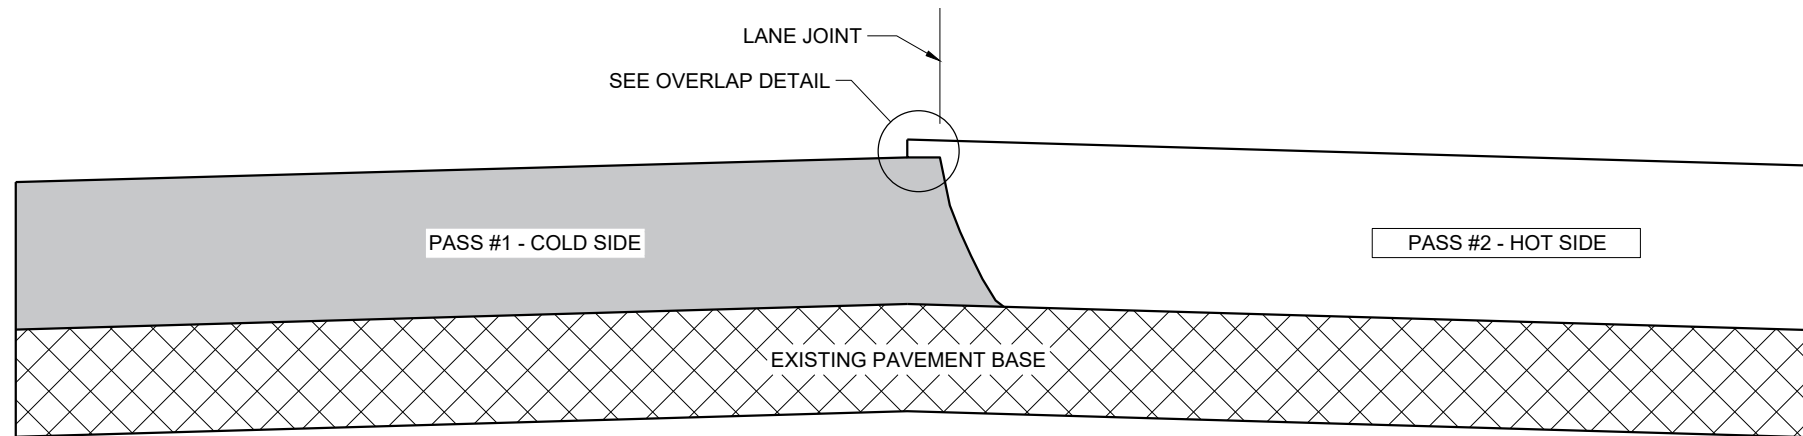

**TYPICAL PAVEMENT CROSS SECTION
VERTICAL JOINT**

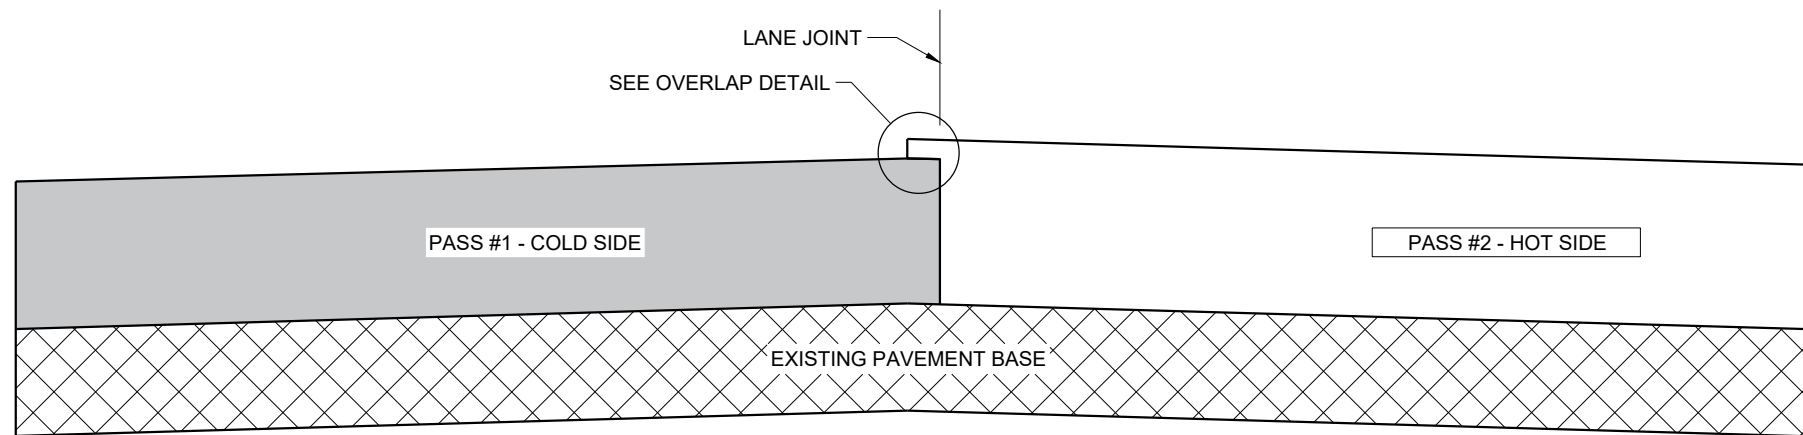

**TYPICAL PAVEMENT CROSS SECTION
VERTICAL JOINT (MILLED)**

GENERAL NOTES


IN ADDITION TO THE DETAILS PROVIDED IN THIS DRAWING, CONFORM TO STANDARD SPECIFICATION 450.3.2.8 FOR WHEN A NOTCHED WEDGE JOINT IS REQUIRED AND FOR GENERAL JOINT CONSTRUCTION REQUIREMENTS.

FOR ALL LONGITUDINAL JOINTS, ENSURE THE PAVER SCREED OVERLAPS THE PREVIOUSLY PLACED PAVEMENT BY $1" \pm 0.5"$ AND THE HOT SIDE OF THE JOINT REMAINS HIGHER THAN THE COLD SIDE BY APPROXIMATELY $0.1"$ AFTER FINAL COMPACTION. (IT WILL BE FLUSH WHEN PAVING IN ECHELON.)

ONLY REMOVE THE LONGITUDINAL NOTCHED WEDGE JOINT FOR SMA PAVEMENT OR AS DIRECTED BY THE ENGINEER TO ADDRESS SPECIFIC LENGTHS OF JOINT DAMAGED BY TRAFFIC.

WHEN MILLING BACK OR REMOVING ANY LONGITUDINAL JOINT, LIMIT THE MATERIAL REMOVED TO $2"$ FROM THE TOP NOTCH OR FROM THE VERTICAL JOINT EDGE ON THE COLD SIDE OF THE JOINT.

USE LONGITUDINAL MILLED JOINT AS PLANS SHOW OR THE AS THE ENGINEER DIRECTS.



OVERLAP DETAIL (TYPICAL)

6

6


SDD 13C19 - 03

SDD 13C19 - 03


HMA LONGITUDINAL JOINTS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
November 2020 DATE /S/ Steven Hefel
HMA PAVEMENT ENGINEER
FHWA




CONSTRUCTED WITH FINAL TWO LAYERS
FOR H 5" OR LESS



CONSTRUCTED WITH FINAL LAYER
FOR H 5" OR LESS




CONSTRUCTED WITH FINAL TWO LAYERS
FOR H GREATER THAN 5"



CONSTRUCTED WITH FINAL LAYER
FOR H GREATER THAN 5"

HMA PAVEMENT AND HMA OVERLAYS



FINISHED SHOULDER AGGREGATE PLACEMENT

6






6

S.D.D. 14 B 29-1

S.D.D. 14 B 29-1





SAFETY EDGE _{SM}	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED DATE	/s/ Jerry H. Zogg ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	

- ① WOOD OR STEEL POSTS (w6X9 OR w6X8.5) MAY BE USED. DO NOT INTERMIX WOOD AND STEEL POSTS. INSTALL STEEL POSTS WITH HOLES ON APPROACHING TRAFFIC SIDE.
- ② USE WOOD OR APPROVED PLASTIC BLOCKOUTS. WOOD BLOCKOUTS MAY BE CONSTRUCTED OUT OF TWO OR MORE WOOD BLOCKOUTS. SEE ALTERNATE WOOD BLOCKOUT DETAIL. DIMENSIONS OF APPROVED PLASTIC BLOCKOUTS MAY VARY.
- ③ IF ROCK IS ENCOUNTERED DURING EXCAVATION, PROVIDE A HOLE 12 INCHES IN DIAMETER EXTENDING 20 INCHES DEEP INTO THE ROCK. PLACE APPROXIMATELY 2 1/2" INCHES OF GRANULAR MATERIAL IN THE BOTTOM OF THE HOLE. CUT THE POSTS THE TO LENGTH AND INSTALL. BACKFILL WITH EXCAVATED MATERIAL AND COMPACT. BACKFILL IS TO BE FREE OF LARGE ROCKS.
- ④ WHEN THE DISTANCE FROM BACK OF POST TO SHOULDER HINGE POINT IS LESS THAN 2 FEET INSTALL LONGER POST AT HALF POST SPACING (K).
- ⑤ FOR NEW MGS INSTALLATION TOP OF W-BEAM RAIL TOLERANCE IS $\pm 1"$. FOR EXISTING MGS INSTALLATION TOP OF W-BEAM IS BETWEEN 27 3/4" TO 32".
- ⑥ WHEN USING STEEL POST AND WOOD BLOCKOUTS INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.
- ⑦ TOTAL POST LENGTH FOR TYPE K IS 7' - 0". TOTAL POST LENGTH FOR OTHER MGS TYPES IS 6' - 0".



STEEL POST & HOLE PUNCHING DETAIL (W 6 X 9)

WOOD POST (6" X 8") NOMINAL




END VIEW MGS LONGER POST AT HALFPST SPACING W BEAM (K)


PLAN VIEW STEEL POST, PLASTIC BLOCKOUT & BEAM

MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

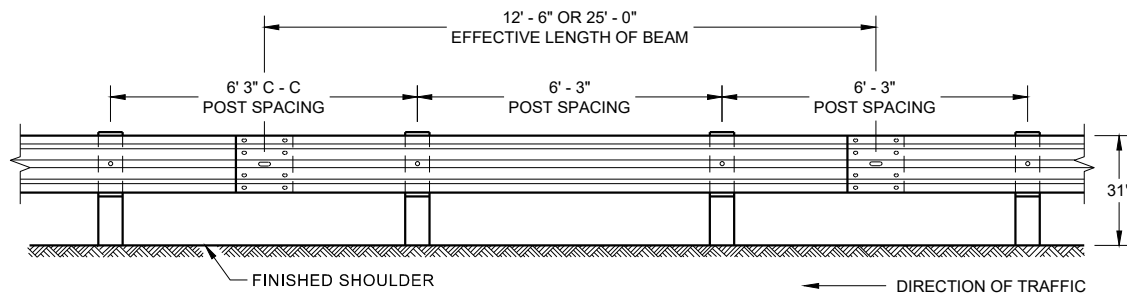


**FRONT VIEW
POST SPACING STANDARD INSTALLATION**

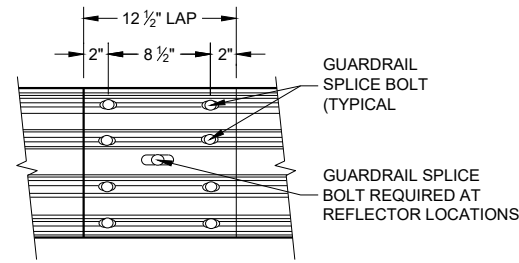


**FRONT VIEW
MID-SPAN BEAM SPLICE**

GENERAL NOTES


- ⑧ DO NOT INSTALL REFLECTORS ON THE FIRST 50 FEET OF THE APPROACH END OF THE ENERGY ABSORBING TERMINAL.
 - ⑨ 25 FEET OF HALF POST SPACING IS REQUIRED ON APPROACH AND DEPARTURE ENDS OF QUARTER POST SPACING.
- POST BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL BOLT. A POST BOLT REQUIRES 3/4" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT AND 3/8" DIAMETER F844 FLAT WASHER. POST BOLTS MAY BE LONGER IF MULTIPLE BLOCKOUTS ARE BEING USED.
- GUARD RAIL SPLICE BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL HEAD BOLT. A GUARDRAIL SPLICE BOLT REQUIRES 3/8" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT.

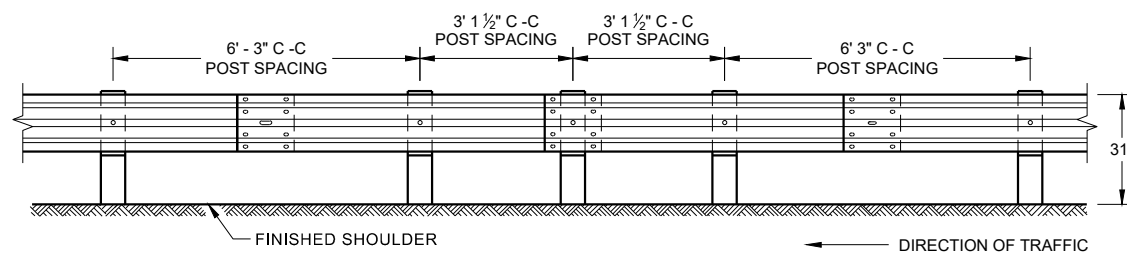


**FRONT VIEW
HALF POST SPACING (HS) AND
HALF POST SPACING WITH LONGER POSTS (K)**




FRONT VIEW AT STEEL POST




FRONT VIEW AT WOOD POST

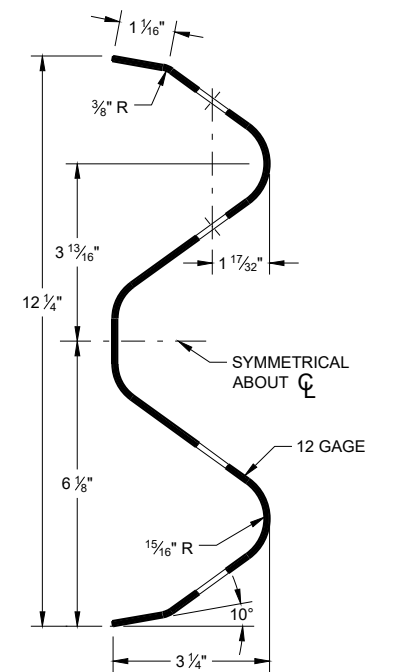

SECTION THRU W-BEAM RAIL



**FRONT VIEW
QUARTER POST SPACING (QS)**



**ONE SIDED REFLECTOR DETAIL
AND TYPICAL INSTALLATION**

**MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

6

6

SDD 14B42 - 07b

SDD 14B42 - 07b




DETAIL FOR 16" BLOCKOUT DEPTH

IT IS ACCEPTABLE TO USE BLOCKOUTS UP TO 16" DEEP TO INCREASE THE POST OFFSET TO AVOID UNDERGROUND OBSTACLES. THERE IS NO LIMIT TO THE NUMBER OF POSTS THAT CAN HAVE ADDITIONAL BLOCKOUTS UP TO 16" DEEP.


NOTE:

1. ALL FILLETS SHALL HAVE A MINIMUM RADIUS OF 3/16".
2. IF THE BOLT EXTENDS MORE THAN 1/4" FROM THE NUT THE BOLT SHOULD BE TRIMMED BACK.




POST BOLT TABLE


L	T (MIN.)
1 1/4"	1 1/8"
2"	1 3/4"
10"	4"
14"	4 1/16"
18"	4"
21"	4 1/16"
25"	4"




ALTERNATE BOLT HEAD



**PLAN VIEW
BEAM LAPPING DETAIL**




**POST DRIVING FOR CONTINUOUS
UNDERGROUND OBSTRUCTION**




DETAIL FOR 36" BLOCKOUT DEPTH


NOTES: UNDER SPECIAL CIRCUMSTANCES, SUCH AS AVOIDING OBSTACLES THAT ARE NOT RELOCATED, IT IS ACCEPTABLE TO INSTALL ADDITIONAL BLOCKOUTS TO OBTAIN UP TO 36" DEPTH FOR ONE OR TWO POSTS IN A SECTION OF GUARDRAIL.
DO NOT USE 16" OR 36" BLOCKOUTS IF IT CAUSES THE POST TO BE DRIVEN BEYOND SHOULDER HINGE POINT OR CAUSES A FIXED OBJECT TO BE WITHIN THE DEFLECTION DISTANCE OF THE BARRIER.



**POST BOLT, SPLICE BOLT
AND RECESS NUT**



SIDE VIEW




PLAN VIEW

**ALTERNATE WOOD
BLOCKOUT DETAIL**


6 WHEN USING STEEL POST AND WOOD BLOCKOUTS, INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.

**MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




MISSING POST IN MGS GUARDRAIL




MISSING POST IN MGS GUARDRAIL NEAR EAT




MISSING POST IN MGS GUARDRAIL NEAR AN APPROACH TRANSITION



MISSING POST IN MGS GUARDRAIL NEAR FLARED BEAM GUARD




MISSING POST IN MGS GUARDRAIL NEAR A TYPE 2 END TERMINAL




MISSING POST IN SHORT SPAN MGS GUARDRAIL NEAR CURB (SL)

- 400 MAX SPAN 12' - 6"
- 401 2' MIN.
- 402 MGS GUARDRAIL 3
- 403 NESTING BEAM GUARD
- 404 ASYMMETRIC TRANSITION
- 405 SOIL WELL DRAINED AND COMPACTED
- 406 SEE OTHER DRAWINGS IN THIS SDD
- 407 SEE OTHER DRAWINGS FOR MIN. SPACING BETWEEN SPANS
- 408 SEE SDD 14B44
- 409 SEE SDD 14B45
- 410 SEE SDD 14B47
- 411 MINIMUM DISTANCE BETWEEN MISSING POST SPANS.



SECTION A - A



SECTION B - B

MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2021 DATE	/S/ Rodney Taylor ROADWAY STANDARDS DEVELOPMENT UNIT SUPERVISOR
<small>FHWA</small>	

GENERAL NOTES

- (A) THE SLOPE IN THE AREA BOUNDED BY THE GRADELINE, THE HINGE POINT LINE AND THE CLEAR ZONE LIMITS (CZL) SHALL BE 4:1 OR FLATTER.
 - (B) AFTER FINAL ASSEMBLY, RECHECK CABLE TO BE SURE IT IS TAUT AND HAS NOT RELAXED
 - (C) DIFFERENT MANUFACTURERS REQUIRE DIFFERENT PERFORATED W - BEAM RAIL END PANELS. SEE MANUFACTURER'S INFORMATION.
 - (D) ATTACH ALUMINUM SHEET TO E.A.T. HEAD USING 4 STAINLESS STEEL SELF - TAPPING SCREWS. ONE SCREW PER CORNER.
 - (E) HARDWARE MAY VARY BETWEEN MANUFACTURER. SEE MANUFACTURER'S DRAWING FOR INFORMATION.
- DIMENSIONS MAY VARY, MANUFACTURER'S INFORMATION.


SEE SDD 14B42 FOR MORE INFORMATION.

* DO NOT ATTACH BLOCKOUTS TO POST 1 AND 2.


DO NOT INSTALL REFLECTORS ON THE FIRST 50 FEET OF THE APPROACH END OF THE ENERGY ABSORBING TERMINAL.

SEE MANUFACTURER'S DRAWING FOR SPLICE LOCATION, HARDWARE DIMENSIONS AND INSTALLATION INSTRUCTIONS.


THE CENTER OF THE UPPER 3 1/2" DIAMETER HOLE ON POST NUMBER 3 THROUGH POST 9 IS TO BE FLUSH WITH THE GROUND LINE UP TO A MAXIMUM OF 2" ABOVE GROUND LINE. WOOD BLOCKS ON POSTS NUMBERED 3 THROUGH 9 MAY BE ADJUSTED UP TO 3" ABOVE THE TOP OF POST.




PLAN




ELEVATION




DETAIL "A"




**SECTION C - C
TYPICAL AT POST NOS. 3 - 9**



**SECTION B - B
TYPICAL AT POST NO. 2***



**SECTION A - A
TYPICAL AT POST NO. 1***



DETAIL "B"

**MIDWEST GUARDRAIL SYSTEM
ENERGY ABSORBING TERMINAL
(MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

6


6

SDD 14B44 - 04a


SDD 14B44 - 04a

BILL OF MATERIALS


PART NO.	DESCRIPTION MATERIALS PROVIDED BY MGS EAT MANUFACTURER. SEE MANUFACTURER'S DETAILS FOR MORE INFORMATION.
①	UPPER POST NO. 1 6" X 6" TUBE
②	LOWER POST NO. 1
③	WOOD CRT
④	WOOD BLOCKOUT
⑤	PIPE SLEEVE
⑥	BEARING PLATE
⑦	BCT CABLE ASSEMBLY
⑧	ANCHOR CABLE BOX
⑨	GROUND STRUT
⑩	PERFORATED W-BEAM RAIL END PANEL, 12'-6" LONG.
⑪	STANDARD W-BEAM RAIL. MULTIPLE SECTIONS REQUIRED. SECTIONS VARY IN LENGTH.
⑫	IMPACT HEAD
⑬	EAT MARKER POST - YELLOW (SEE APPROVED PRODUCTS LIST)
⑭	SOIL PLATE
⑮	UPPER POST NO. 2
⑯	LOWER POST NO. 2




GENERIC GROUND STRUT ⑨ ⑤




GENERIC ANCHOR CABLE BOX ⑨ ⑤

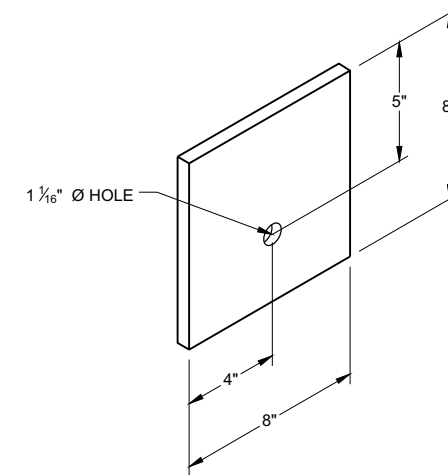


BEARING PLATE ⑥ ⑤




UPPER POST NO. 1 ⁽¹⁾ (E)




LOWER POST NO. 1 ⁽²⁾ (E)




WOOD CRT POST ⁽³⁾ (E)
POSTS NUMBER 3-9



UPPER POST NO. 2 ⁽¹⁵⁾ (E)




LOWER POST NO. 2 ⁽¹⁶⁾ (E)



WOOD BLOCKOUT ⁽⁴⁾
REQ'D. AT ALL POSTS EXCEPT POST NO'S 1 & 2


6

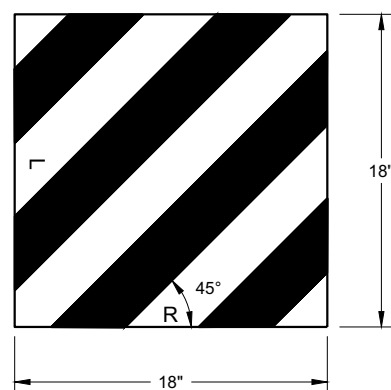


REFLECTIVE SHEETING DETAIL ^(E)

TYPE H
YELLOW REFLECTIVE
SHEETING 3" X 9".
SEE STANDARD
SPECIFICATION 637.


E.A.T. MARKER
POST (YELLOW)



FRONT VIEW SIDE VIEW
E.A.T. MARKER POST ⁽¹³⁾



SIDE VIEW



TOP VIEW

ALTERNATE WOOD
BLOCKOUT DETAIL

6

SDD 14B44 - 04c


SDD 14B44 - 04c

**MIDWEST GUARDRAIL SYSTEM
ENERGY ABSORBING TERMINAL
(MGS)**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
7/2018 DATE /S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR

FHWA




PLAN VIEW
SHORT RADIUS BEAM GUARD WITH
SHORT RADIUS TERMINAL ON
SECONDARY ROAD OR DRIVEWAY




PLAN VIEW
SHORT RADIUS BEAM GUARD WITH
EAT, ADDITIONAL BEAM GUARD
OR
TRANSITION TO RIGID BARRIER ON
SECONDARY ROAD OR DRIVEWAY

TABLE FOR RADIUS OF 32' AND LESS

RADIUS (FT)	LENGTH (FT)	WIDTH (FT)
8	25	15
16	30	15
24	40	20
32	50	30



AREA FREE OF FIXED
OBJECTS FOR RADIUS
32' AND LESS




AREA FREE OF FIXED
OBJECTS FOR RADIUS
GREATER THAN 32'


GENERAL NOTES

- SEE PLANS FOR OTHER BARRIER SYSTEM AND LOCATION SPECIFICS.
- SEE SDD 14B42 FOR MORE INFORMATION ON BEAM GUARD INSTALLATION, PARTS, MATERIALS, AND INSTALLATION INFORMATION.
- GALVANIZE PARTS AFTER FABRICATION.
- WELDING TO FOLLOW CURRENT REQUIREMENTS OF THE AMERICAN WELDING SOCIETY STRUCTURAL WELDING CODE ANSI / AWS D1.1.
- UNLESS NOTED OTHERWISE, ALL PLATES ARE FLAT AND FREE OF WARP.
- UNLESS NOTED OTHERWISE, ALL EDGES ARE SMOOTH, STRAIGHT AND VERTICAL.
- ALL CUTS AND HOLES, EXCEPT IN BEAM GUARD RAIL ARE TO BE MACHINED OR MACHINE FLAME CUT.
- UNLESS NOTED OTHERWISE, CUT OR PROVIDE BOLTS THAT ARE 1/4" TO 1/2" BEYOND THE NUT.
- DRAWINGS ARE NOT TO SCALE.


- ① RADIUS MEASURE FROM INSIDE OF RAIL. LENGTH OF BEAM GUARD SHORT RADIUS GUARD MEASURED ALONG TRAFFIC SIDE OF RAIL. RADIUS BETWEEN 8 FEET TO 150 FEET. SEE PLAN FOR REQUIRED RADIUS. BEAM GUARD RAIL IN RADIUS IS SHOP BENT. ODD RAIL LENGTH OR FIELD CUTS MAY BE REQUIRED.
- ② CONTROLLED RELEASE TERMINAL (CRT) POSTS ARE USED IN THE RADIUS. CONTROLLED RELEASE TERMINAL (CRT) POSTS ARE SPACED 6' - 3". SEE PLAN FOR NUMBER OF CONTROLLED RELEASE (CRT) POSTS.
- ③ WITHIN RADIUS BEAM GUARD RAILS ARE NOT BOLTED TO POSTS. BEAM GUARD RAIL IS RESTED ON TOP OF LAG SCREW.
- ④ MINIMUM LENGTH OF BEAM GUARD ALONG SIDE ROAD OR DRIVEWAY TO INSTALL SHORT RADIUS TERMINAL. BEAM GUARD IS PAID WITH BEAM GUARD ITEM.
- ⑤ ODD LENGTH OF BEAM GUARD REQUIRED TO INSTALL SHORT RADIUS TERMINAL.
- ⑥ MINIMUM AMOUNT OF BEAM GUARD TO BE INSTALLED PRIOR TO TRANSITION TO RIGID BARRIER. ADDITIONAL BEAM GUARD, OR EAT. BEAM GUARD PAID FOR WITH BEAM GUARD ITEM. SEE PLANS FOR MORE DETAIL.
- ⑦ BEAM GUARD, EAT, OR TRANSITION TO RIGID BARRIER. SEE PLAN.
- ⑧ TOP OF BEAM GUARD BY THE RADIUS IS 27". HEIGHT OF BEAM GUARD IS 31" BY TRANSITION TO RIGID BARRIER, ADDITIONAL BEAM GUARD OR EAT.
- ⑨ ADDITIONAL BEAM GUARD, EAT OR TRANSITION TO RIGID BARRIER. BEAM GUARD SHOWN. SEE PLAN FOR DETAILS.
- ⑩ SHORT RADIUS TERMINAL (SEE OTHER DETAILS).
- ⑪ HEIGHT VARIES. SEE NOTE ⑧ AND ⑧.
- ⑫ BEAM GUARD RAIL SPLICE LOCATION. SPLICE LOCATION REQUIRES PART F1 AND F2. SEE SDD 14B42 FOR DETAILS.
- ⑬ SEE TABLE FOR VALUES.
- ⑭ MAXIMUM HEIGHT FOR CENTER OF HOLE IS 3/4" ABOVE FINISHED GROUND ±1".
- ⑮ DRILL POST 1 5/8" DIA. PILOT HOLE. DO NOT HAMMER LAG SCREW INTO POST.
- ⑯ SMALL SIGNS ON BREAKAWAY HARDWARE ARE ACCEPTABLE.
- ⑰ TOP OF RAIL HEIGHT IS 27" WHEN USING A SHORT RADIUS TERMINAL (CRT).



CONTROLLED RELEASE
TERMINAL POST (CRT) IN RADIUS




BEAM GUARD POSTS
IN HEIGHT TRANSITION




LAP SPLICE DETAIL

SHORT RADIUS BEAM
GUARD (MGS) SHORT
RADIUS TERMINAL (MGS)


STATE OF WISCONSIN
 DEPARTMENT OF TRANSPORTATION




**PROFILE VIEW
SHORT RADIUS TERMINAL**



**TOP VIEW
SHORT RADIUS TERMINAL**



**TOP VIEW
DETAIL "A"
(WOOD BREAKAWAY AND BEAM
GUARD RAIL POSTS NOT SHOWN)**



**PROFILE VIEW
DETAIL "A"**

GENERAL NOTES


- 100 TOP OF FOUNDATION TUBE 2 INCHES MAXIMUM ABOVE FINISHED GROUND.
- 101 WASHERS REQUIRED BETWEEN BOLT HEAD AND FOUNDATION TUBE AND BETWEEN NUT AND FOUNDATION TUBE.
- 102 SPLICE BOLT AND NUT CONNECTS BEAM GUARD RAIL, W-BEAM SECTION BUFFER, AND STEEL PIPE ASSEMBLY. NO WASHER REQUIRED. SEE DETAIL "B".
- 103 CABLE IS TAUT.
- 104 ADJUST AA2 AND BB1 TO FIT.
- 105 BREAK POINT OF SHOULDER.
- 106 TACK WELD CABLE CONNECTOR TUBE PLATE TO CABLE CONNECTION TUBE. SEE DETAIL "A" PROFILE VIEW.
- 107 PAY LIMIT FOR BEAM GUARD.
- 108 SQUARE WASHER BETWEEN HEAD OF BOLT AND TRAFFIC FACE OF BEAM GUARD. ROUND WASHER REQUIRED BETWEEN NUT AND BB1.
- 109 CUT OR PROVIDE THREADED STUD THAT IS FLUSH WITH FACE OF BEAM GUARD RAIL KK1 (PLUS OR MINUS 1/2" TOLERANCE). DEBURR AFTER CUTTING.
- 110 SEE STEEL PIPE ASSEMBLY DETAILS.
- 111 ATTACH UU2 WITH UU3. SHOP APPLY UU1 TO UU2.
- 112 FOUR (4) HH1 AND HH2 REQUIRED TO ATTACH AA1 TO AA2.
- 113 FOUR (4) HH1 AND HH2 REQUIRED TO ATTACH AA2 TO BB1.

**SHORT RADIUS BEAM
GUARD (MGS) SHORT
RADIUS TERMINAL (MGS)**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES


(200) TWO (2) NAILS SPACED 4 INCHES CENTER TO CENTER.




**PROFILE VIEW
DETAIL "B"
STEEL PIPE ASSEMBLY
(BEAM GUARD AND W BEAM
END SECTION NOT SHOWN)**



**PROFILE VIEW
DETAIL "C"**



**PLAN VIEW
DETAIL "B"
STEEL PIPE ASSEMBLY**






**PROFILE VIEW
DETAIL "D"**

**SHORT RADIUS BEAM
GUARD (MGS) SHORT
RADIUS TERMINAL (MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




GENERAL NOTES

300 WASHERS REQUIRED BETWEEN BOLT HEAD AND BEAM GUARD RAIL AND BETWEEN NUT AND ANCHOR BRACKET. EIGHT (8) LL1 AND LL3 REQUIRED. SIXTEEN (16) LL2 REQUIRED.



SECTION A - A

6



ANCHOR BRACKET BEARING PLATE (KK2)


ANCHOR BRACKET (KK1, KK2)

**SHORT RADIUS BEAM
GUARD (MGS) SHORT
RADIUS TERMINAL (MGS)**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

SDD 14B53 - 01d

SDD 14B53 - 01d




TOP VIEW




TOP VIEW

GENERAL NOTES


- (400) CROSS SECTION OF PART IS TO FIT OVER AA1 .
- (401) CROSS SECTION OF PART IS TO FIT OVER OR UNDER AA1 .




SECTION B - B




SECTION C - C



PROFILE VIEW
W BEAM
END SECTION BUFFER (AA2)




PROFILE VIEW
W BEAM
TERMINAL CONNECTOR (BB1)




REFLECTIVE SHEETING (UU1, UU2)

**SHORT RADIUS BEAM
GUARD (MGS) SHORT
RADIUS TERMINAL (MGS)**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




**FRONT VIEW SIDE VIEW
CONTROLLED RELEASE
POST (CRT) (DD2)**




**FRONT VIEW SIDE VIEW
WOOD BREAKAWAY POST (FF1)**




**FRONT VIEW SIDE VIEW
FOUNDATION TUBE (QQ1)**




**FOUNDATION TUBE -
ANCHOR CABLE TUBE (QQ2)**




**ANCHOR CABLE TUBE
END PLATE (QQ3)**




**RECTANGULAR PLATE
WASHER (CC1)**



BEARING PLATE (PP1)



SOIL PLATE (SS1)



CABLE ASSEMBLY (MM1a, MM1b)

"X" LENGTH

MM1b	9' - 0"
MM1b	6' - 8"

GENERAL NOTES

- (500) SEE DETAIL "D" FOR LOCATION AND ATTACHMENT OF SS1.
- (501) FOR MM1a THREADED STUD ONLY REQUIRED ON ONE END. SWAGED FITTING REQUIRED.
- (502) LOCATE HOLES ON THE CENTERLINE OF THE SIDE OF THE POST.
- (503) MM1a MAY HAVE ONE THREADED STUD 4 INCHES LONG. SEE NOTE (109).

**SHORT RADIUS BEAM
GUARD (MGS) SHORT
RADIUS TERMINAL (MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

BILL OF MATERIALS - SHORT RADIUS BEAM GUARD (MGS)

PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
A1	BEAM GUARD RAIL	AASHTO M180, CLASS A, TYPE 2	
		APPROVED PRODUCER	
A2	BEAM GUARD RAIL - SHOP BENT	INDICATE ON BACK OF RAIL THE RADIUS THAT RAIL WAS BENT TO. SHOP BEND RADIUS IS TO THE NEAREST FOOT. FOLLOW AASHTO M180 ON HOW TO MARK RADIUS INFORMATION.	
		AASHTO M180, CLASS A, TYPE 2	
		APPROVED PRODUCER	
B1	BLOCK - WOOD	WISDOT SPEC. 614	SEE SDD 14B42
C1	NAIL	ASTM A153 HOT DIP CLASS D	
		ASTM F1667 TYPE 1 STYLE 12 (16 DOUBLE HEAD)	
D1	POST-STRONG POST-WOOD	WISDOT SPEC. 614	SEE SDD 14B42
D2	POST-CRT-WOOD	WISDOT SPEC. 614	
E1	POST BOLT	ASTM A307 GRADE A OR SAE J429 GRADE 2	5/8" DIA. SEE SDD 14B42 FOR BOLT GEOMETRY
		AASHTO M180	
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	
		UNC	
E2	POST BOLT - WASHER	ASTM F436 TYPE 1 (HARDEN TYPICALLY USED WITH STEEL) OR ASTM F844 (UNHARDENED TYPICALLY WITH WOOD)	5/8" DIA.
		GALV. AASHTO M111 / ASTM A 123 OR GALV. HOT DIP. TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329	
E3	POST BOLT - NUT	AASHTO M180 DOUBLE RECESSED HEAVY HEX HEAD	5/8" DIA. SEE SDD 14B42 FOR BOLT GEOMETRY
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	
		UNC	
		OVER TAPPED NUTS OVER-SIZE AS SPECIFIED IN AASHTO 291 / ASTM A 563	
		ASTM A563 GRADE A HEAVY HEX HEAD	
F1	SPLICE BOLT	GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	5/8" DIA. SEE SDD 14B42 FOR BOLT GEOMETRY
		ASTM A307 GRADE A OR SAE J429 GRADE 2	
		UNC	
		AASHTO M180	

PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
F2	SPLICE BOLT - NUT	ASTM A563 GRADE A	5/8" DIA. SEE SDD 14B42 FOR BOLT GEOMETRY
		AASHTO M180 DOUBLE RECESSED HEAVY HEX HEAD	
		GALV. HOT DIP TO AASHTO M232 CLASS C/ASTM A153 CLASS C/ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1/ASTM B695 CLASS 50, TYPE 1	
		OVER TAPPED NUTS OVER-SIZE AS SPECIFIED IN AASHTO 291 / ASTM A 563	
		UNC	
G1	LAG SCREW	ASTM A308 GRADE A ASTM A153 CLASS D	1/2" DIA. 6" LONG
H1	DELINEATOR - BEAM GUARD		SEE SDD 14B42 FOR MORE INFORMATION
H2	DELINEATION - SHEETING	YELLOW OR WHITE	
		WISDOT SPEC 637 TYPE SH	
		APPROVED PRODUCT LIST	
J1	FOUNDATION BACKFILL	STANDARD SPEC. 614	
AA1	BEAM GUARD RAIL - PUNCHED	AASHTO M180, CLASS A, TYPE 2	
		APPROVED PRODUCER	
AA2	BEAM GUARD RAIL - END SECTION BUFFER	AASHTO M180, CLASS A, TYPE 2	
		APPROVED PRODUCER	
BB1	BEAM GUARD RAIL - TERMINAL CONNECTOR MODIFIED	AASHTO M180, CLASS A, TYPE 2	
		APPROVED PRODUCER	
CC1	SHORT RADIUS - SQUARE WASHER	AASHTO M180	
		GALV. AASHTO M111 / ASTM A123	
EE1	NAIL	ASTM A153 HOT DIP CLASS D	
		ASTM F1667 TYPE 1 STYLE 12 (16 DOUBLE HEADED)	
FF1	POST - BCT - WOOD	S4S FINISH ON 4 SIDES	
		WISDOT SPEC. 614	
GG1	POST BOLT	ASTM A307 GRADE A OR SAE J429 GRADE 2	5/8" DIA. SEE SDD 14B42 FOR BOLT GEOMETRY
		AASHTO M180	
		GALV. HOT DIP TO AASHTO M232 CLASS C/ASTM A153 CLASS C/ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1/ASTM B695 CLASS 50, TYPE 1	
		UNC	
GG2	POST BOLT - WASHER	ASTM F436 TYPE 1 (HARDEN TYPICALLY USED WITH STEEL) OR ASTM F844 (UNHARDENED TYPICALLY WITH WOOD)	5/8" DIA.
		GALV. AASHTO M111 / ASTM A 123 OR GALV. HOT DIP. TO AASHTO M232 CLASS C/ASTM A153 CLASS C / ASTM F2329	

6

6

SDD 14B53 - 019

SDD 14B53 - 019

SHORT RADIUS BEAM GUARD (MGS) SHORT RADIUS TERMINAL (MGS)

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

BILL OF MATERIALS - SHORT RADIUS BEAM GUARD (MGS)

PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
GG3	POST BOLT - NUT	ASTM A563 GRADE A	3/8" DIA. SEE 14B42 FOR GEOMETRY
		AASHTO M180 DOUBLE RECESSED HEAVY HEX HEAD	
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	
		UNC	
		OVER TAPPED NUTS OVER-SIZE AS SPECIFIED IN AASHTO 291 / ASTM A 563	
ASTM A563 GRADE A HEAVY HEX HEAD			
HH1	SPLICE BOLT	GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	3/8" DIA. SEE SDD 14B42 FOR BOLT GEOMETRY
		ASTM A307 GRADE A OR SAE J429 GRADE 2	
		UNC	
		AASHTO M180 HEAD GEOMETRY	
HH2	SPLICE BOLT - NUT	ASTM A563 GRADE A	3/8" DIA. SEE SDD 14B42 FOR BOLT GEOMETRY
		AASHTO M180 DOUBLE RECESSED HEAVY HEX HEAD	
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	
		OVER TAPPED NUTS OVER-SIZE AS SPECIFIED IN AASHTO 291 / ASTM A 563	
		UNC	
JJ1	PIPE - STEEL	ASTM A53 GALVANIZED GRADE B SCHEDULE 40	10" O.D.
JJ2	TOP PLATE	ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX STRENGTH 50 KSI OR ASTM A709 MAX STRENGTH 50 KSI OR ASTM A992 MAX STRENGTH 50 KSI	DIMENSIONS 3/8" X 4" X 1' - 0"
		GALV. AASHTO M111 / ASTM A123	
KK1	ANCHOR BRACKET	ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX STRENGTH 50 KSI OR ASTM A709 MAX STRENGTH 50 KSI OR ASTM A992 MAX STRENGTH 50 KSI	
		GALV. AASHTO M111 / ASTM A123	
KK2	ANCHOR BRACKET - BEARING PLATE	ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX STRENGTH 50 KSI OR ASTM A709 MAX STRENGTH 50 KSI OR ASTM A992 MAX STRENGTH 50 KSI	
		GALV. AASHTO M111 / ASTM A123	
LL1	ANCHOR BRACKET - BOLT	ASTM A307 GRADE B HEAVY HEX HEAD OR SAE J429 GRADE 2 HEAVY HEX HEAD	3/8" DIA.
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	
		UNC	

PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
LL2	ANCHOR BRACKET - WASHER	ASTM F436 TYPE 1 (HARDEN WASHER ONLY)	3/8" DIA.
		GALV. AASHTO M111 / ASTM A123 OR GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329	
LL3	ANCHOR BRACKET - NUT	ASTM A563 GRADE A	3/8" DIA.
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	
		OVER TAPPED NUTS OVER-SIZE AS SPECIFIED IN AASHTO 291 / ASTM A 563	
		UNC	
MM1a	ANCHOR CABLE	AASHTO M30 / ASTM A741 INDEPENDENT WIRE CORE (IWRC) OR WIRE STRAND CORE (WCS), IMPROVED PLOW STEEL (IPS), 6X19, TYPE II OR IIc CLASS C ZINC COATED	
MM1b	ANCHOR CABLE	AASHTO M30 / ASTM A741 INDEPENDENT WIRE CORE (IWRC) OR WIRE STRAND CORE (WCS), IMPROVED PLOW STEEL (IPS), 6X19, TYPE II OR IIc CLASS C ZINC COATED	
MM2	ANCHOR CABLE - SWAGE FITTING	ASTM A576 GRADE 1035	
		SWAGE FITTINGS ARE TO BE FACTORY SWEDGED. WITH A BREAKING STRENGTH 40,000 LBS.	
		GALV. AASHTO M111 / ASTM A123	
		ASME B30.26 FORGED, CAST, OR DIE STAMPED WITH THE FOLLOWING INTO CONNECTION: NAME OF MANUFACTURER OR TRADEMARK OF CONNECTION'S MANUFACTURER, SIZE OR RATED LOAD, GRADE.	
MM3	WIRE ROPE CABLE CLAMPS	FF-C-450D TYPE 1 CLASS 1	3/4"
		ASTM A153 HOT DIP CLASS D	
MM4	ANCHOR CABLE - SWAGE FITTING - STUD	ASTM F3125 GRADE A325 TYPE 1 OR SAE GRADE 5 OR ASTM A449 TYPE 1 HEAVY HEX HEAD	
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	
		UNC	
NN1	ANCHOR CABLE - NUT	ASTM A563 GRADE A	1" DIA.
		AASHTO M180 DOUBLE RECESSED HEAVY HEX HEAD	
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	
		OVER TAPPED NUTS OVER-SIZE AS SPECIFIED IN AASHTO 291 / ASTM A 563	
NN2	ANCHOR CABLE - NUT - WASHER	UNC	1" DIA.
		ASTM F436 TYPE 1 (HARDEN WASHER ONLY)	
		GALV. AASHTO M111 / ASTM A123 OR GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329	

6

6

SDD 14B53 - 01h

SDD 14B53 - 01h

**SHORT RADIUS BEAM
GUARD (MGS) SHORT
RADIUS TERMINAL (MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

BILL OF MATERIALS - SHORT RADIUS BEAM GUARD (MGS)

PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
PP1	BEARING PLATE AT POST	ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX STRENGTH 50 KSI OR ASTM A709 MAX STRENGTH 50 KSI OR ASTM A992 MAX STRENGTH 50 KSI	
		GALV. AASHTO M111 / ASTM A123	
PP2	PIPE - STEEL	ASTM A53 GALVANIZED GRADE B SCHEDULE 40	2" DIA. x 6" LONG
QQ1	FOUNDATION TUBE	ASTM A500 GRADE B	8" X 6" X 3/8"
		GALV. AASHTO M111 / ASTM A123	
QQ2	SHORT RADIUS - FOUNDATION TUBE - ANCHOR CABLE - TUBE	ASTM A500 GRADE B	DIMENSIONS 2 1/2" X 2 1/4" X 1/4" X 8"
		GALV. AASHTO M111 / ASTM A123	
QQ3	SHORT RADIUS - SOIL TUBE - ANCHOR CABLE - TUBE - END PLATE	ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX STRENGTH 50 KSI OR ASTM A709 MAX STRENGTH 50 KSI OR ASTM A992 MAX STRENGTH 50 KSI	DIMENSIONS 2 1/2" X 2 1/2" X 1/4"
		GALV. AASHTO M111 / ASTM A123	
QQ4	GROUND STRUT AND YOKE - BOLT	GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	5/8 DIA.
		ASTM A307 GRADE B HEAVY HEX HEAD OR SAE J429 GRADE 2 HEAVY HEX HEAD	
		UNC	
QQ5	GROUND PLATE AND YOKE - WASHER	ASTM F436 TYPE 1 (HARDEN WASHER ONLY)	5/8 DIA.
		GALV. AASHTO M111 / ASTM A123 OR GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329	
QQ6	GROUND STRUT AND YOKE - NUT	HEAVY HEX	5/8 DIA.
		UNC	
		ASTM A563 GRADE A	
		OVER TAPPED NUTS AS SPECIFIED IN AASHTO 291 / ASTM A 563	
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	

PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
SS1	SOIL PLATE	ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX STRENGTH 50 KSI OR ASTM A709 MAX STRENGTH 50 KSI OR ASTM A992 MAX STRENGTH 50 KSI	
		GALV. AASHTO M111 / A123	
TT1	SOIL PLATE - BOLT	ASTM A307 GRADE B HEAVY HEX HEAD OR SAE J429 GRADE 2 HEAVY HEX HEAD	5/8 DIA.
		GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	
		UNC	
TT2	SOIL PLATE - WASHER	ASTM F436 TYPE 1 (HARDEN WASHER ONLY)	5/8 DIA.
		GALV. AASHTO M111 / ASTM A123 OR GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329	
TT3	SOIL PLATE - NUT	GALV. HOT DIP TO AASHTO M232 CLASS C / ASTM A153 CLASS C / ASTM F2329 OR GALV. MECHANICALLY TO AASHTO M298 CLASS 50, TYPE 1 / ASTM B695 CLASS 50, TYPE 1	5/8 DIA.
UU1	OBJECT MARKER - SHEETING	MUTCD / WISDOT OBJECT MARKER TYPE 3	PATTERN AND COLOR FOR SHEETING. SHEETING TYPE FOR MARKER.
		WISDOT SPEC 637 TYPE F	
		APPROVED PRODUCT LIST	
UU2	OBJECT MARKER - ALUMINUM PLATE	WISDOT SPEC 637 ALUMINUM PLATE	MATERIAL AND THICKNESS OF MATERIALS
UU3	OBJECT MARKER - SCREWS	STAINLESS SELF-TAPPING SCREWS	
VV1	FOUNDATION BACKFILL	WISDOT SPEC 614	

6

6

SDD 14B53 - 01i



SDD 14B53 - 01i

**SHORT RADIUS BEAM
GUARD (MGS) SHORT
RADIUS TERMINAL (MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2017 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT
ENGINEER

FHWA




MARKER POST, FLEXIBLE

DIRECTION OF TRAFFIC FLOW


GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.



PLAN VIEW
CONCRETE MASONRY ENDWALLS FOR
CULVERT PIPE AND PIPE ARCH

FLEXIBLE MARKER POST LOCATION



CROSS SECTION
FLEXIBLE MARKER POST

FLEXIBLE MARKER POST FOR CULVERT END



STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

6



6

S.D.D. 15 A 3-2a


S.D.D. 15 A 3-2a




FRONT VIEW SIDE VIEW
ALTERNATE 1




FRONT VIEW SIDE VIEW
ALTERNATE 2




FRONT VIEW SIDE VIEW
ALTERNATE 3




DETAIL B




DETAIL C




SECTION A-A




SECTION B-B




SECTION C-C



FRONT VIEW SIDE VIEW
ALTERNATE 1



FRONT VIEW SIDE VIEW
ALTERNATE 2




FRONT VIEW SIDE VIEW
ALTERNATE 3

FLEXIBLE MARKER POST ANCHORS

FLEXIBLE MARKER POST FOR CULVERT END

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
10/1/2012 DATE /S/ Travis Feltes
STATE TRAFFIC ENGINEER OF DESIGN
FHWA

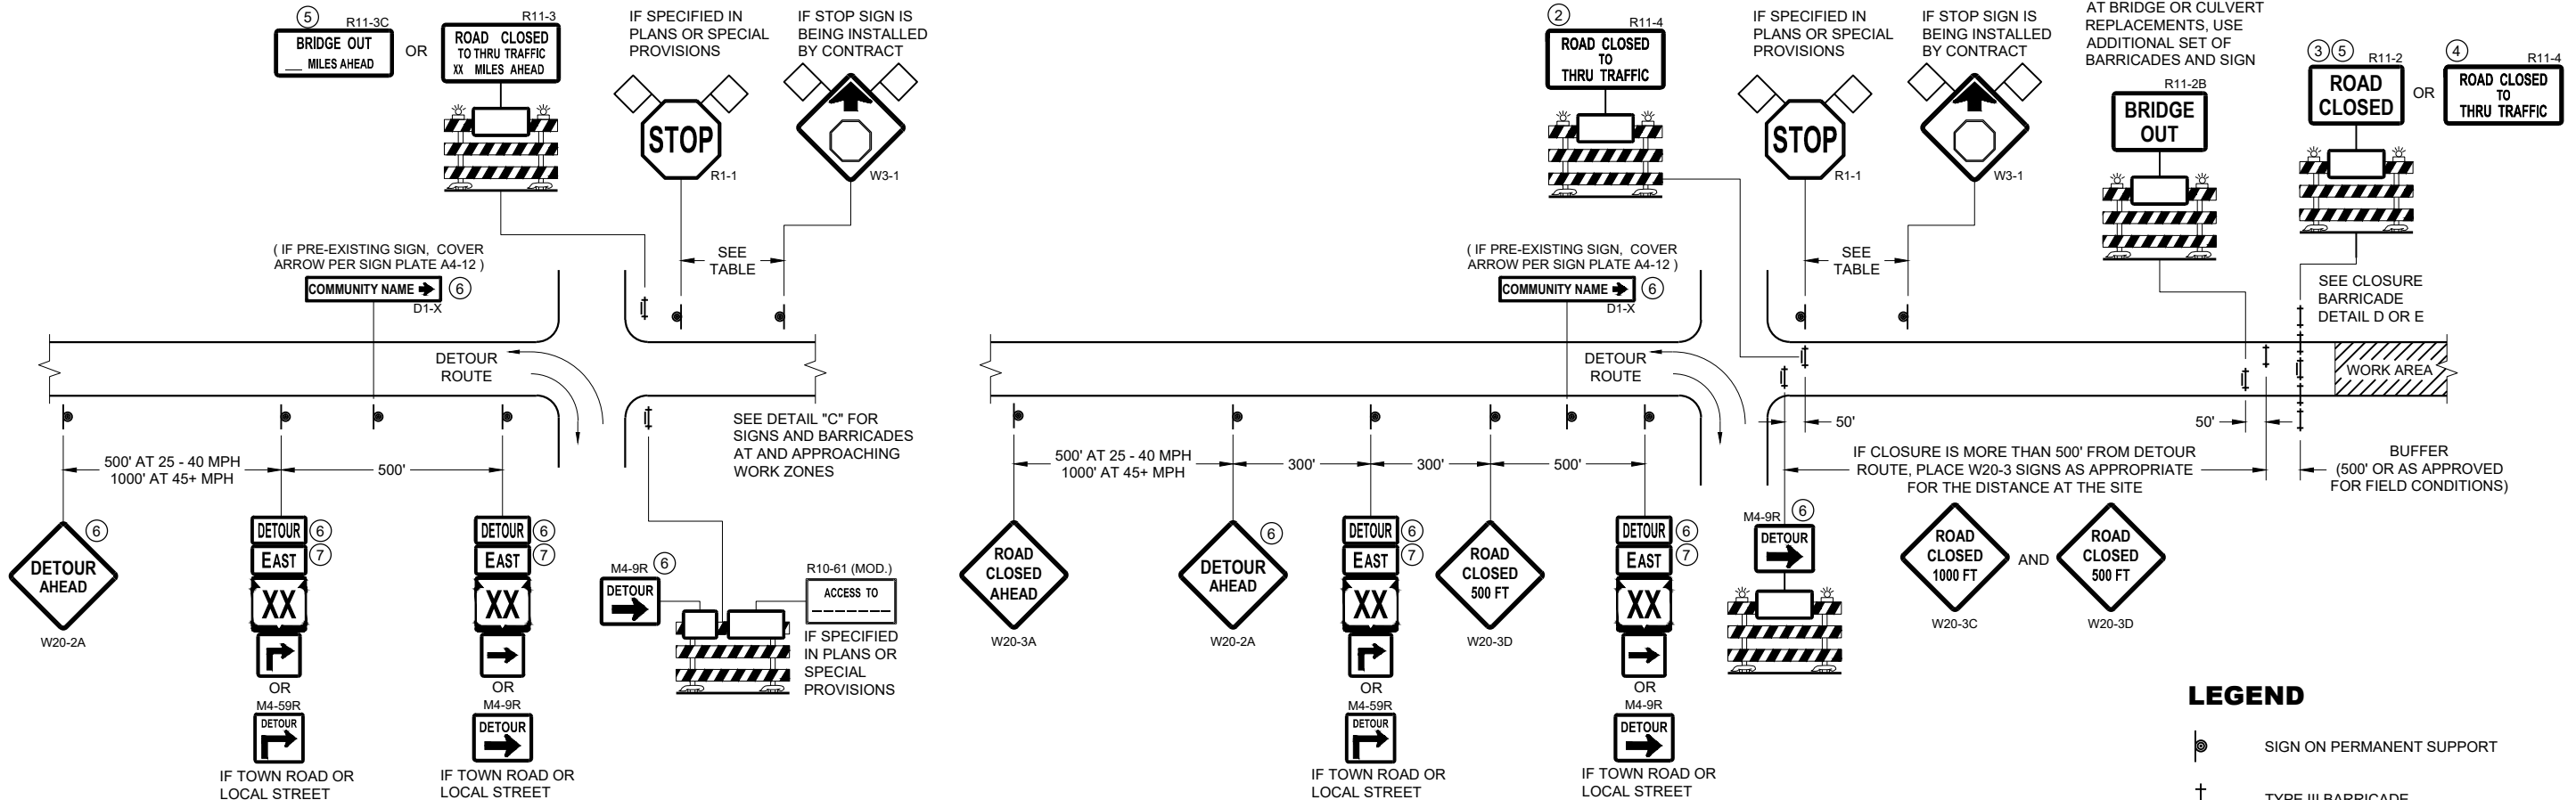

**DETAIL A
MAINLINE CLOSURE WITH POSTED DETOUR**

WORK ZONE GREATER THAN OR EQUAL TO 1/2 MILE FROM
DETOUR ROUTE (1000 FEET IF URBAN)

**DETAIL B
MAINLINE CLOSURE WITH POSTED DETOUR**


WORK ZONE LESS THAN 1/2 MILE FROM
DETOUR ROUTE (1000 FEET IF URBAN)

LEGEND

- SIGN ON PERMANENT SUPPORT
- TYPE III BARRICADE
- TYPE III BARRICADE WITH ATTACHED SIGN
- TYPE "A" WARNING LIGHT (FLASHING)
- WORK AREA
- FLAGS, 16" X 16" MIN. (ORANGE)

SPEED LIMIT (MPH)	"STOP AHEAD" ADVANCE WARNING DISTANCE (FT)
25	200
30	200
35	350
40	350
45	500
50	550
55	750

- M4 - 8
- M3 - X
- M1 - 4 OR M1 - 6 OR M1 - 5A
- M05 - 1 OR M06 - 1




**DETAIL C
MAINLINE CLOSURE, NO POSTED DETOUR**

SEE SDD 15C2-SHEET "b"
FOR GENERAL NOTES
AND FOOTNOTES ① THROUGH ⑦


**BARRICADES AND SIGNS
FOR MAINLINE CLOSURES**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2020 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER



**DETAIL D
ROAD CLOSURE BARRICADE DETAIL
APPROACH VIEW**



**DETAIL E
LANE CLOSURE BARRICADE DETAIL
APPROACH VIEW**

SEE SDD 15C2 - SHEET "a" FOR LEGEND

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND BARRICADES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE", SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

BARRICADES THAT MUST BE MOVED FOR A WORK OPERATION SHALL BE IMMEDIATELY RE-ESTABLISHED UPON COMPLETION OF THE OPERATION, OR FOR CONTINUING OPERATIONS, AT THE END OF EACH WORKING DAY.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

ALL TYPE III BARRICADES SHALL HAVE RAILS REFLECTORIZED ON BOTH FACES. STRIPES SHALL BE PROPERLY SLOPED DOWN TOWARD THE TRAFFIC SIDE OR AS SHOWN IN THE ROAD CLOSURE BARRICADE DETAIL "D" FOR FULL ROAD CLOSURES.

TYPE "A" LOW - INTENSITY FLASHING WARNING LIGHTS SHALL BE VISIBLE ON BOTH SIDES OF THE BARRICADE.

THE R11 - 2, R11 - 3, M4 - 9, R11 - 4, AND R10 - 61 SIGNS PLACED ON THE BARRICADES SHALL COVER NO MORE THAN THE TOP RAIL. THE SIGNS SHALL NOT COVER ANY PORTION OF THE MIDDLE RAIL OR BOTTOM RAILS.

"WO" AND "MO" SIGNS ARE THE SAME AS "W" AND "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

ALL SIGNS SHALL BE 48" X 48" UNLESS OTHERWISE NOTED BELOW:

- R11 - 2 SHALL BE 48" X 30"
- R11 - 3 SHALL, R11 - 4 AND R10 - 61 SHALL BE 60" X 30"
- M4 - 9 SHALL BE 30" X 24"
- M3 - X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M4 - 8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M1 - 4, M1 - 5A AND M1 - 6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
- MO5 - 1 AND MO6 - 1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
- D1 - X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.
- R1 - 1 SHALL BE 36" X 36"

- ① TWO WARNING LIGHTS SHALL BE PROVIDED ON THE CENTER BARRICADE AND A MINIMUM OF ONE WARNING LIGHT SHALL BE PROVIDED ON EACH OF THE OTHER BARRICADES WITHIN THE ROADWAY LIMITS. SPACING OF THE WARNING LIGHTS SHALL BE UNIFORM TO THE EDGE OF ROADWAY AS SHOWN (APPROX. 8 FOOT LIGHT SPACING).
- ② THESE SIGNS AND BARRICADES ARE NOT REQUIRED IF ROAD CLOSURE BEGINS AT AN INTERSECTION.
- ③ FOR ROAD CLOSURE WITHOUT LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "D".
- ④ FOR ROAD CLOSURE WITH LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "E".
- ⑤ FOR BRIDGE OR CULVERT REPLACEMENTS, SUBSTITUTE "BRIDGE OUT" INSTEAD OF "ROAD CLOSED" ON R11 - 2 AND R11 - 3 SIGNS.
- ⑥ INSTALL DETOUR AND COMMUNITY GUIDE SIGNS AND ARROWS ONLY IF SPECIFIED IN THE CONTRACT. IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. MODIFY EXISTING SIGNS WHERE POSSIBLE. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. IF DETOUR SIGNS ARE BEING INSTALLED BY OTHERS, PLACE THE CONTRACTED TRAFFIC CONTROL SIGNS TO ALLOW FOR PLACEMENT OF ALL WARNING, DETOUR AND GUIDE SIGNS AS SHOWN.
- ⑦ "EAST" CARDINAL DIRECTION MARKERS AND RIGHT TURN ARROWS ARE SHOWN. USE OTHER CARDINAL DIRECTIONS AND ARROWS AS APPROPRIATE.

**BARRICADES AND SIGNS
FOR
VARIOUS CLOSURES**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2020 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

LEGEND

- SIGN ON PERMANENT SUPPORT
- WORK AREA
- DETOUR M4 - 8
- EAST M3 - X
- XX M1 - 4 OR XX M1 - 6 OR COUNTY X M1 - 5A
- M05 - 1 OR M06 - 1 OR M06 - 1

GENERAL NOTES

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. MODIFY EXISTING SIGNS WHERE POSSIBLE.

THE SPACING BETWEEN TRAFFIC CONTROL AND DETOUR SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.




"MO" SIGNS ARE THE SAME AS "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

SIGN SIZES SHALL BE AS FOLLOWS:

- M3-X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M4-8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M1-4, M1-5A AND M1-6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
- M05-1 AND M06-1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
- M4-9 AND M4-59 SHALL BE 30" X 24"
- M4-8a SHALL BE 24" X 18"
- G20-51 SHALL BE 60" X 24"
- W20-2A SHALL BE 48" X 48"
- D1-X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.

- * OPTIONAL SIGNS. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS.
- ** FOR A TOWN ROAD OR LOCAL STREET DETOURED ONTO A STATE TRUNK HIGHWAY, PLACE A ROAD NAME PLAQUE ABOVE THE M4-9 SIGN AS SPECIFIED IN THE CONTRACT.

THIS DRAWING PROVIDES GENERAL GUIDANCE ON TYPICAL DETOUR SIGN LAYOUT AND SPACING. SEE PROJECT DETOUR SIGNING SHEETS FOR SPECIFIC DETAILS FOR EACH PROJECT.

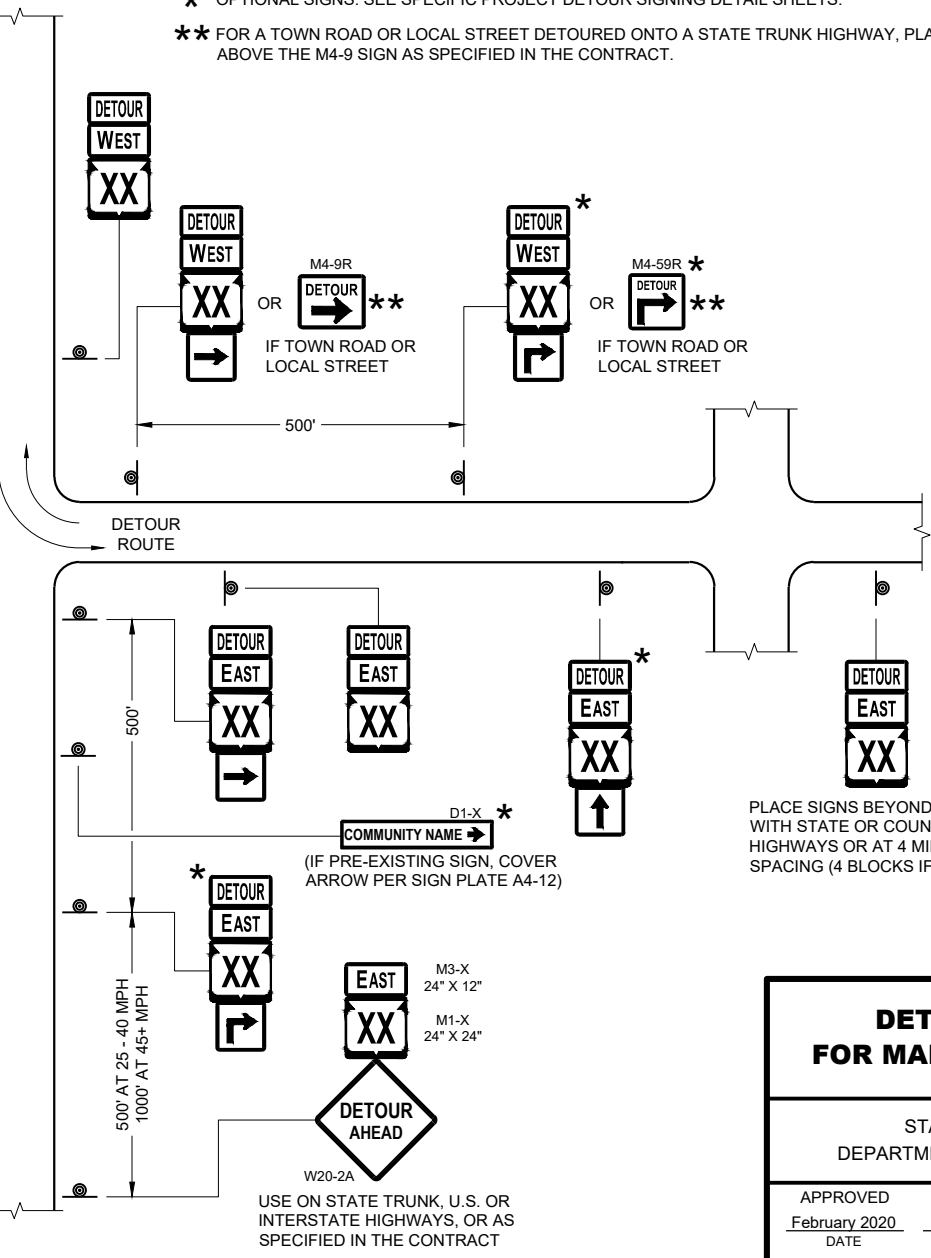

**DETAIL F
DETOUR SIGNING**


SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS AND DETAIL A OR B ON SDD SHEET 15C02 - SHEET "a"

**DETOUR SIGNING
FOR MAINLINE CLOSURES**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2020 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER


FHWA




DETAIL 1
(NO ACCESS TO PROJECT)



DETAIL 2
(PUBLIC CROSS-TRAFFIC MAINTAINED.
NO ACCESS TO PROJECT)



DETAIL 3
(PUBLIC CROSS-TRAFFIC MAINTAINED.
CONTRACTOR, LOCAL BUSINESS AND
RESIDENT ACCESS TO PROJECT)



DETAIL 4
(CONTRACTOR, LOCAL BUSINESS AND
RESIDENT ACCESS TO PROJECT)

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND BARRICADES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE (500 FEET DESIRABLE) TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

IF A "STOP" SIGN MUST BE REMOVED FOR A WORK OPERATION, A TEMPORARY "STOP" SIGN SHALL BE PLACED PRIOR TO THE SIGN REMOVAL, OR A FLAGGER SHALL BE PROVIDED UNTIL THE SIGN IS REESTABLISHED.

BARRICADES THAT MUST BE MOVED FOR A WORK OPERATION SHALL BE IMMEDIATELY REESTABLISHED UPON COMPLETION OF THE OPERATION OR FOR CONTINUING OPERATIONS, AT THE END OF EACH WORKING DAY.

SIGNS THAT WILL BE IN PLACE LESS THAN SEVEN CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

ALL TYPE III BARRICADES SHALL HAVE RAILS REFLECTORIZED ON BOTH FACES. STRIPES SHALL BE PROPERLY SLOPED DOWN TOWARD THE TRAFFIC SIDE OR AS SHOWN IN THE ROAD CLOSURE BARRICADE DETAIL "D" FOR FULL ROAD CLOSURES.

TYPE "A" LOW-INTENSITY FLASHING WARNING LIGHTS SHALL BE VISIBLE ON BOTH SIDES OF THE BARRICADE.

THE R11-2, R11-3, AND R11-4 SIGNS PLACED ON BARRICADES SHALL COVER NO MORE THAN THE TOP RAIL. THE SIGNS SHALL NOT COVER ANY PORTION OF THE MIDDLE OR BOTTOM RAILS.

ALL SIGNS SHALL BE 48" X 48" UNLESS OTHERWISE NOTED BELOW:
R11-2 SHALL BE 48" X 30".
R11-4 AND R11-3 SHALL BE 60" X 30".

- * OMIT THE "ROAD CLOSED 500 FT." SIGN IF THE LAST INTERSECTION IS 500 FEET OR LESS FROM THE WORK ZONE.
- ** 500' MAX. OR AT LAST INTERSECTION, WHICHEVER IS CLOSEST.

LEGEND

- ⊙ SIGN ON PERMANENT SUPPORT
- ⊥ TYPE III BARRICADE
- ⊥ TYPE III BARRICADE WITH ATTACHED SIGN
- ⚡ TYPE "A" WARNING LIGHT (FLASHING)
- ▨ WORK AREA

**BARRICADES AND SIGNS
FOR
SIDEROAD CLOSURES**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
July 2018 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A MINIMUM OF 200 FEET (500 FEET DESIRABLE) CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.




ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.


SIGNS THAT WILL BE IN PLACE LESS THAN SEVEN CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

IF A "STOP" SIGN MUST BE REMOVED FOR A WORK OPERATION, A TEMPORARY "STOP" SIGN SHALL BE PLACED PRIOR TO THE SIGN REMOVAL, OR A FLAGGER SHALL BE PROVIDED UNTIL THE SIGN IS REESTABLISHED.


- * OMIT G20-1 SIGNS IF LENGTH OF WORK AREA IS 2 MILES OR LESS
- ** PLACE AN ADDITIONAL W20-1A "ROAD WORK AHEAD" SIGN IF WORK AREA WITHIN THE PROJECT IS SEPARATED BY MORE THAN 2 MILES FROM PREVIOUS WORK AREA.

LEGEND

-  SIGN ON PERMANENT SUPPORT
-  DIRECTION OF TRAFFIC
-  WORK AREA

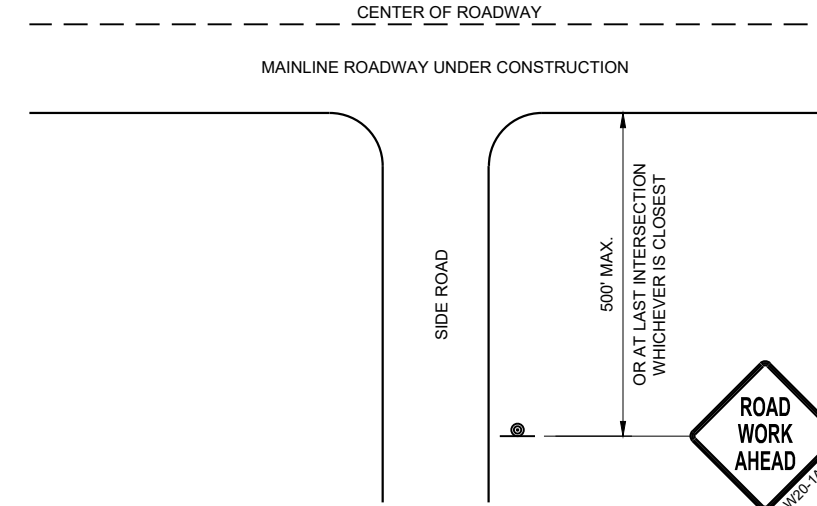

TYPICAL SIDE ROAD APPROACH WARNING SIGN DETAIL




TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45MPH OR GREATER

TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45 MPH OR GREATER TWO-WAY UNDIVIDED ROAD OPEN TO TRAFFIC


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
DATE July 2018 /S/ Andrew Heidtke
WORK ZONE ENGINEER

FHWA




TWO WAY TRAFFIC




ONE WAY TRAFFIC

PERMANENT PAVEMENT MARKING



TWO WAY TRAFFIC

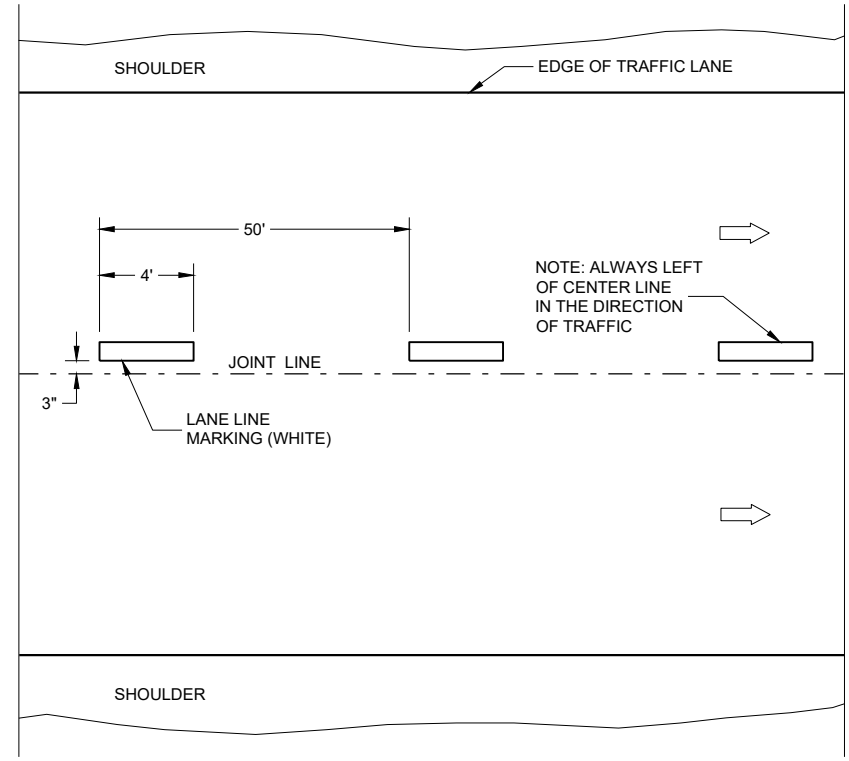

ONE WAY TRAFFIC

TEMPORARY PAVEMENT MARKING


GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS.

- ① LOCATE THE NO PASSING ZONE W14-3 SIGN WITHIN 50 FEET OF THE "T" MARKING
- ② MEASURE FROM EDGE OF MARKING TO JOINT LINE. THIS DOES NOT INCLUDE SPACE NEEDED FOR GROOVING OPERATIONS.

LEGEND


- "T" MARKING
- SIGN ON PERMANENT SUPPORT
- DIRECTION OF TRAFFIC




LONGITUDINAL MARKING (MAINLINE)

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION

APPROVED
 February 2020 /S/ Matthew Rauch
 DATE STATEWIDE SIGNING AND MARKING ENGINEER
 FHWA



DRUM




42" CONE

DO NOT USE IN TAPERS
1/2 SPACING OF DRUMS


GENERAL NOTES

- ① REFLECTIVE SHEETING SHALL FOLLOW THE REQUIREMENTS IN THE APPROVED PRODUCTS LISTING FOR SIGN SHEETING.
- ② LOCATION OF WARNING LIGHTS WHEN SHOWN ON THE PLAN.




VERTICAL PANEL

THE STRIPES SHALL SLOPE DOWNWARD TO
THE TRAFFIC SIDE FOR CHANNELIZATION.



TYPE II BARRICADE

FOR RAILS LESS THAN 36" LONG, 4" WIDE STRIPES
MAY BE USED. ALL STRIPES SHALL SLOPE DOWNWARD
TO THE TRAFFIC SIDE FOR CHANNELIZATION.



TYPE III BARRICADE

IF SIGN MOUNTED, DO NOT COVER MORE THAN 50% OF THE TOP
TWO RAILS OR 33% OF THE TOTAL AREA OF THE THREE RAILS.






* IF USED FOR A PERMANENT APPLICATION USE RED SHEETING.

**CHANNELIZING DEVICES
DRUMS, CONES, BARRICADES
AND VERTICAL PANELS**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2021 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

LEGEND

-  SIGN ON PORTABLE OR PERMANENT SUPPORT
-  TEMPORARY PORTABLE RUMBLE STRIP ARRAY
-  DIRECTION OF TRAFFIC
-  WORK AREA
-  FLAGGER, EQUIPPED WITH STOP/SLOW PADDLE FASTENED ON SUPPORT STAFF

GENERAL NOTES

DETAILS OF TRAFFIC CONTROL DEVICES AND INSTALLATION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS, THE SPECIAL PROVISIONS, AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS, DEVICES, AND LOCATION OF ALL FLAGGERS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

THE FIRST ADVANCE WARNING SIGN SHOULD TYPICALLY BE LOCATED IN ADVANCE OF THE ANTICIPATED TRAFFIC BACKUP OR QUEUE.


WHEN A SIDE ROAD OR RAMP INTERSECTS THE FACILITY ON WHICH THE WORK IS BEING PERFORMED, ADDITIONAL TRAFFIC CONTROLS SHALL BE PROVIDED AS SPECIFIED IN THE PLANS AND/OR THE SPECIAL PROVISIONS OR AS APPROVED BY THE ENGINEER.

FLAGGING

- FLAGGERS SHALL BE IN SIGHT OF EACH OTHER OR IN DIRECT COMMUNICATION AT ALL TIMES. THEY SHALL BE EQUIPPED WITH STOP/SLOW PADDLES FASTENED ON SUPPORT STAFFS. WHEN THE FLAGGING OPERATION IS NOT IN EFFECT REMOVE TEMPORARY PORTABLE RUMBLE STRIPS PRIOR TO COVERING OR REMOVING ALL ADVANCE SIGNING.
- ① FOR MOVING WORK OPERATIONS, POST ADDITIONAL W20-7A FLAGGER SIGNS AT APPROXIMATELY 3,500' INTERVALS IN THE MOVING WORK OPERATION OR AS APPROVED BY THE ENGINEER.
 - ② SIGN NOT REQUIRED IF FLAGGING OPERATION OCCURS WITHIN A SIGNED ROAD WORK ZONE AREA.
- WHEN THE DISTANCE BETWEEN FLAGGERS EXCEEDS 2 MILES, A PILOT CAR IS REQUIRED. WHEN CURVES REDUCE SIGHT DISTANCE BELOW 400', A PILOT CAR IS REQUIRED.

TEMPORARY PORTABLE RUMBLE STRIPS

- UTILIZE TEMPORARY PORTABLE RUMBLE STRIPS ON ALL FLAGGING OPERATIONS.
- ③ EACH TEMPORARY PORTABLE RUMBLE STRIP ARRAY CONSISTS OF THREE RUMBLE STRIPS SPACED ACCORDING TO MANUFACTURER'S RECOMMENDATION, PLACED TRANSVERSE ACROSS THE LANE AT LOCATIONS SHOWN.
- ONLY USE TEMPORARY PORTABLE RUMBLE STRIPS FOR THE APPROVED PRODUCTS LIST.
- INSTALL TEMPORARY RUMBLE STRIPS PER MANUFACTURER'S RECOMMENDATIONS.
- PLACE ADVANCE SIGNING PRIOR TO INSTALLING TEMPORARY RUMBLE STRIPS.
- DO NOT INSTALL TEMPORARY PORTABLE RUMBLE STRIPS ON GRAVEL, MILLED SURFACES, OR ASPHALT THAT HAS BEEN PAVED LESS THAN 12 HOURS.

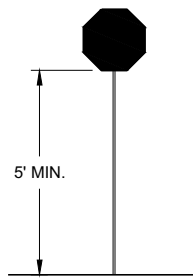

STOP/SLOW PADDLE ON SUPPORT STAFF


SIGN AND TEMPORARY RUMBLE STRIP ARRAY SPACING TABLE

SPEED LIMIT	SPACING "A"
25-30 MPH	200'
35-40 MPH	350'
45-55 MPH	500'



W03-4

USE OF W03-4 SIGN IS OPTIONAL. WHEN USED, THIS SIGN SHALL BE LOCATED BETWEEN THE W20-7A AND W20-4A SIGNS, USING SPACING "A".

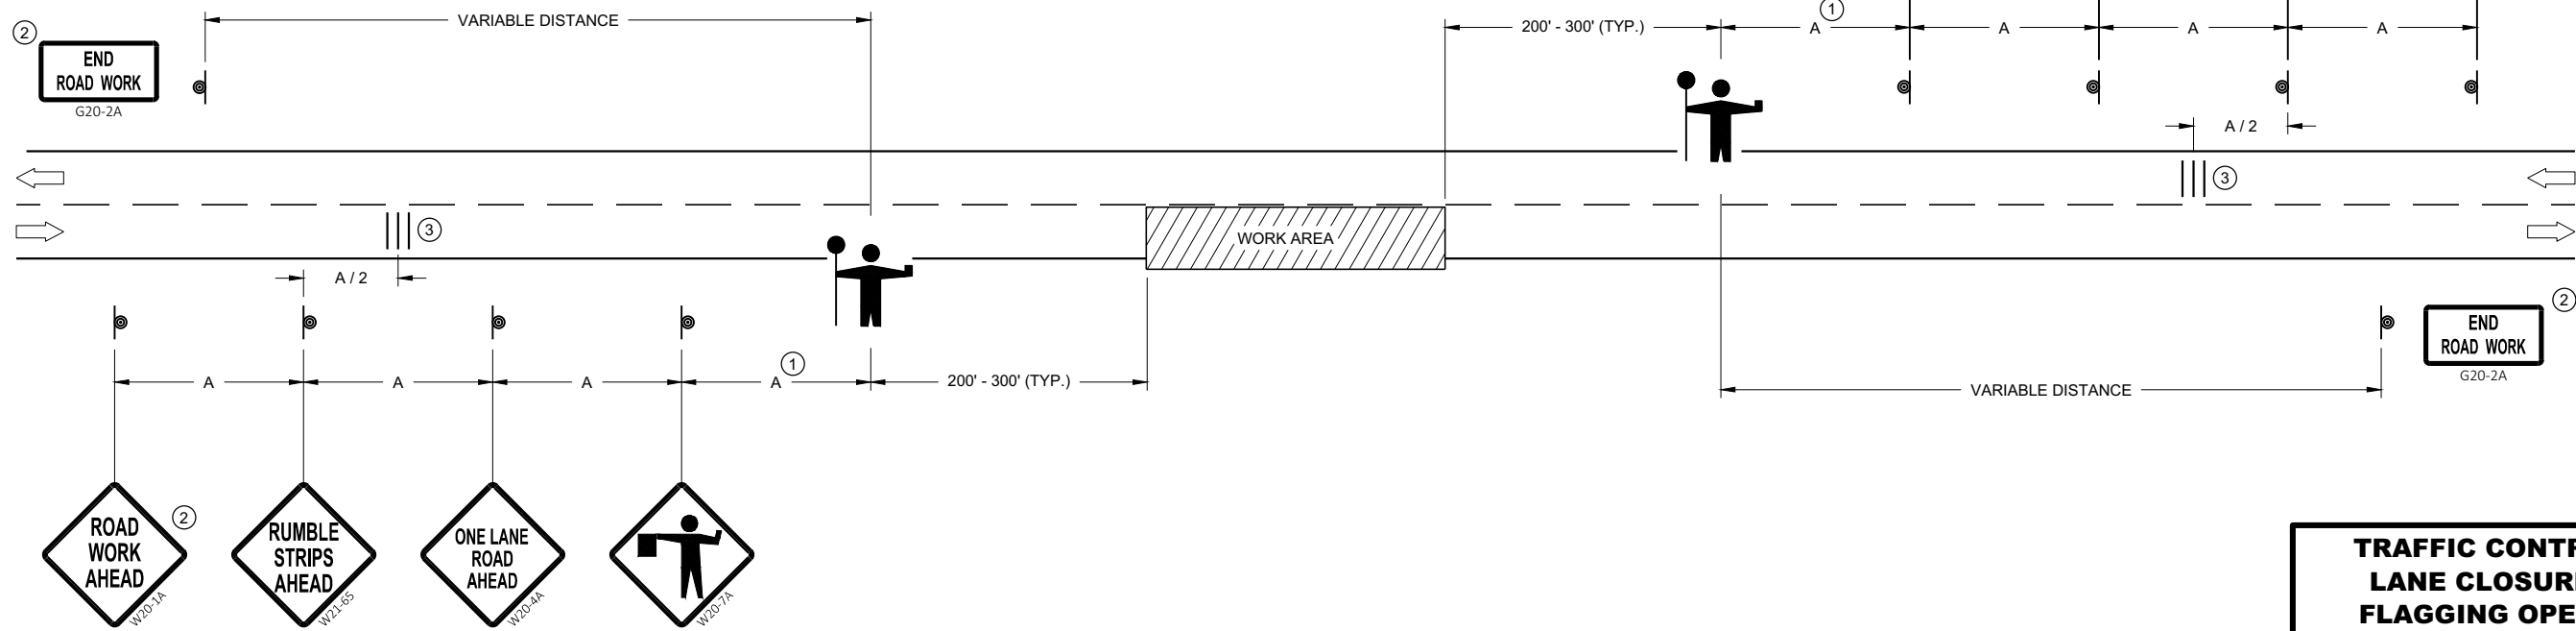

TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION





TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
DATE: May 2019 /S/ Andrew Heidtke
WORK ZONE ENGINEER

FHWA

LEGEND

- V1 LEAD VEHICLE
- V2 MARKING VEHICLE
- V3 SHADOW VEHICLE
-  TRUCK MOUNTED ATTENUATOR (TMA)
-  SIGN ON TEMPORARY SUPPORT
-  DIRECTION OF TRAFFIC
-  FLASHING ARROW PANEL (CAUTION)

GENERAL NOTES

ALL VEHICLES SHALL BE EQUIPPED WITH TWO 360 DEGREE HIGH INTENSITY YELLOW FLASHING LIGHTS OR STROBE LIGHTS AND OPERATED WITH HEADLIGHTS TURNED ON.

ALL VEHICLES SHALL BE EQUIPPED WITH REAR FACING TYPE B OR C FLASHING ARROW PANEL OPERATING IN CAUTION MODE. SIGNS PLACED ON VEHICLES MUST NOT OBSCURE THE ARROW PANEL.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE SPECIFIED.

DISTANCE BETWEEN VEHICLES MAY VARY ACCORDING TO TERRAIN, SIGHT DISTANCE, PAINT DRYING TIME, AND OTHER FACTORS. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, SHADOW VEHICLES SHOULD MAINTAIN THE MINIMUM DISTANCE FROM THE WORK VEHICLE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. SHADOW VEHICLES SHOULD SLOW DOWN IN ADVANCE OF VERTICAL AND HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.

THE WORK AND SHADOW VEHICLES SHOULD PULL OVER PERIODICALLY TO ALLOW TRAFFIC TO PASS.

WHEN NO WORK ACTIVITY IS TAKING PLACE, REMOVE OR LAY STATIONARY SIGNS AND SUPPORTS FLAT ON THE GRADE WITH UPRIGHTS ORIENTED PARALLEL TO AND DOWNSTREAM FROM TRAFFIC.


CONES SHOULD BE USED BETWEEN THE MARKING AND SHADOW VEHICLE AT 100 FOOT SPACING. CONES MAY BE OMITTED ON PAINTED LINE IF APPROVED BY THE ENGINEER. CONSIDER PAVEMENT MARKING DRY OR CURE TIMES AND TRAFFIC VOLUME.

CONES SHALL BE A MINIMUM OF 28" FOR WET PAVEMENT MARKING.

- ① SIGNS SHALL BE REPEATED APPROXIMATELY EVERY THREE MILES.
- ② IF CONSTRUCTION WORK ZONE SIGNS ARE IN PLACE, W20-1A OR W21-63 ARE NOT REQUIRED.

6

6



**MOVING PAVEMENT MARKING OPERATIONS
TWO-LANE TWO-WAY ROADWAY**

SDD 15C19 - 06a

SDD 15C19 - 06a

MOVING PAVEMENT MARKING OPERATION TWO-LANE TWO-WAY ROADWAY	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED November 2019 DATE	/S/ Andrew Heidtke WORK ZONE ENGINEER
FHWA	


GENERAL NOTES

OMIT EDGE LINES THROUGH INTERSECTIONS. CONTINUE EDGE LINES THROUGH DRIVEWAYS.


- ① WHEN DISTANCE "A" IS LESS THAN 250 FEET, OMIT LANE LINE.
- ② WHEN DISTANCE "B" IS LESS THAN 100 FEET, OMIT CHANNELIZING LANE LINE.
- ③ BARRIER LINE ENDS AT SIDE ROAD PAVEMENT / SURFACE EDGE EXTENSION.
- ④ BARRIER LINE STARTS 500 FEET PRIOR TO THE BYPASS TAPER.

LEGEND


➡ DIRECTION OF TRAVEL

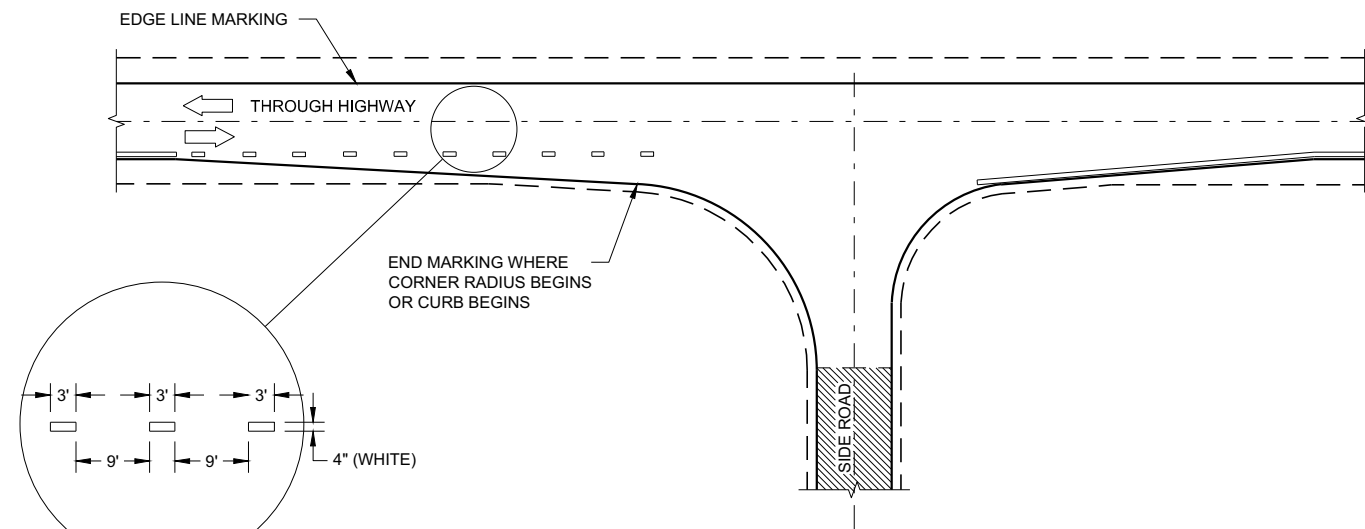

MINOR INTERSECTION

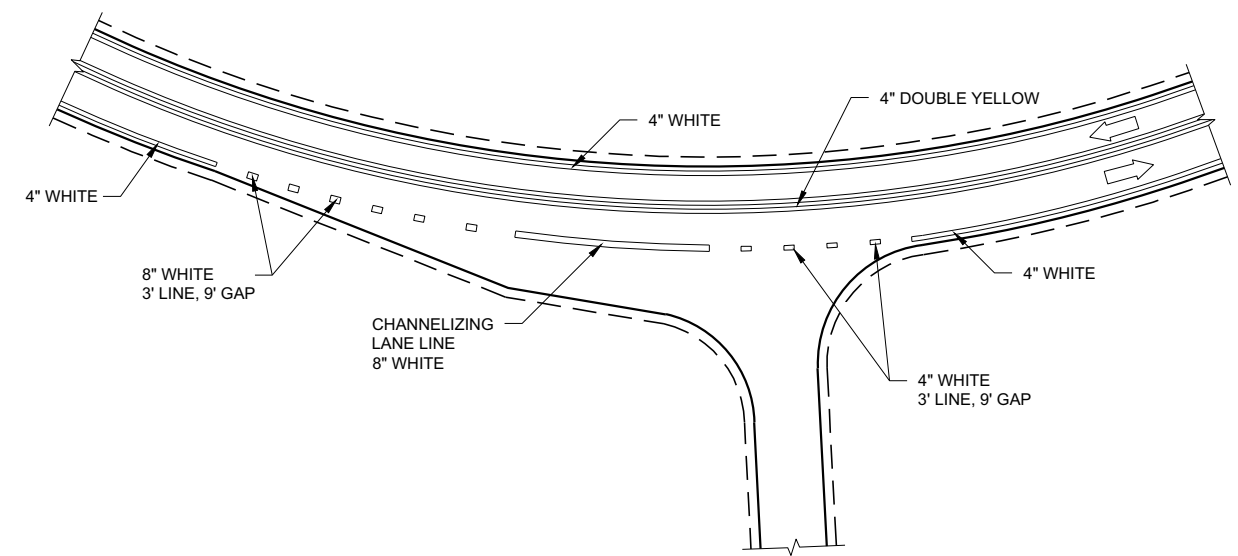

INTERSECTION ON OUTSIDE OF CURVE




**MAJOR INTERSECTIONS
(INTERSECTION WITH FULL RIGHT TURN LANE OR BYPASS LANE)**

**PAVEMENT MARKING
(INTERSECTIONS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

LEGEND

- V1 SHADOW VEHICLE 1
- V2 SHADOW VEHICLE 2
- V3 ADVANCE WARNING TRUCK
- TRAFFIC CONTROL DRUM
- ◻ TRUCK MOUNTED ATTENUATOR (TMA)
- ⊥ SIGN ON TEMPORARY SUPPORT
- ➡ DIRECTION OF TRAFFIC
- ◻ FLASHING ARROW PANEL (MERGE)
- ◻ FLASHING ARROW PANEL (CAUTION)
- PCMS PORTABLE CHANGEABLE MESSAGE SIGN
- ▨ WORK AREA

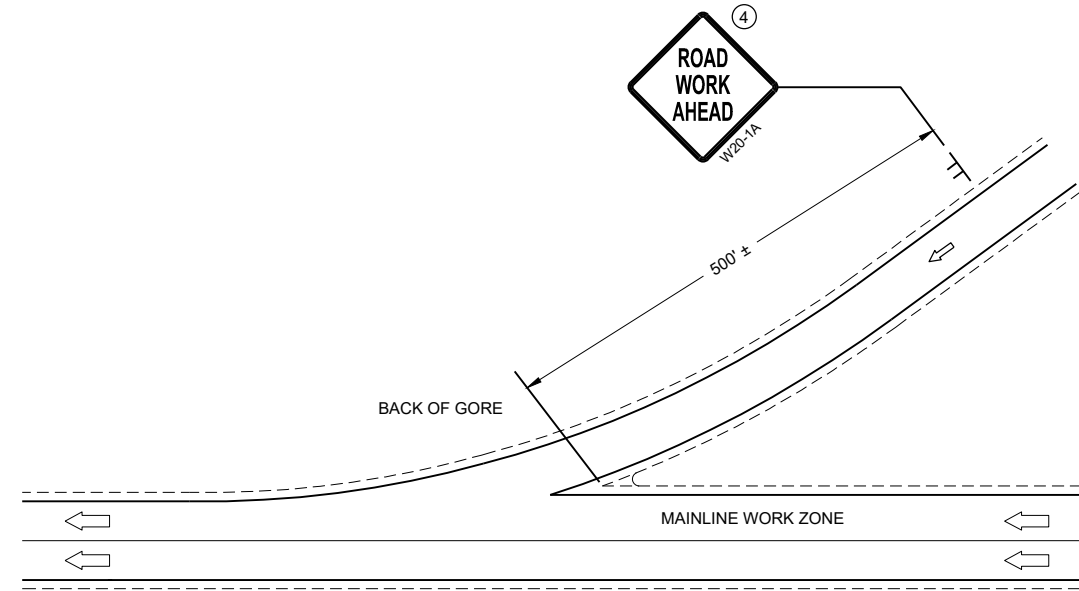

GENERAL NOTES

SHORT DURATION IS WORK THAT OCCUPIES A LOCATION UP TO 1 HOUR.

MOBILE IS WORK THAT MOVES INTERMITTENTLY OR CONTINUOUSLY.

ALL VEHICLES SHALL BE EQUIPPED WITH TWO 360 DEGREE HIGH INTENSITY YELLOW FLASHING LIGHTS OR STROBE LIGHTS AND OPERATED WITH HEADLIGHTS TURNED ON.

ALL VEHICLES SHALL BE EQUIPPED WITH REAR FACING TYPE B OR C FLASHING ARROW PANEL. SIGNS PLACED ON VEHICLES MUST NOT OBSCURE THE ARROW PANEL.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE SPECIFIED.

WHEN WORK ACTIVITY BLOCKS THE RIGHT LANE, REVERSE TRAFFIC CONTROL.

WHEN A RAMP INTERSECTS THE FACILITY ON WHICH THE WORK IS BEING PERFORMED, PROVIDE ADDITIONAL TRAFFIC CONTROLS AS SPECIFIED IN THE CONTRACT OR AS APPROVED BY THE ENGINEER.

USE DOUBLE ARROWS WHEN CONVOY IS IN CENTER LANE ONLY.


WHEN NO WORK ACTIVITY IS TAKING PLACE, REMOVE OR LAY STATIONARY SIGNS AND SUPPORTS FLAT ON THE GRADE WITH UPRIGHTS ORIENTED PARALLEL TO AND DOWNSTREAM FROM TRAFFIC

- ① DISTANCE BETWEEN VEHICLES MAY VARY ACCORDING TO TERRAIN, SIGHT DISTANCE AND OTHER FACTORS. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, SHADOW VEHICLES SHOULD MAINTAIN THE MINIMUM DISTANCE FROM THE WORK VEHICLE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. SHADOW VEHICLES SHOULD SLOW DOWN IN ADVANCE OF VERTICAL AND HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.
- ② DRUMS ARE TO BE USED FOR BRIDGE DECK SEALING AND OTHER PROJECTS THAT REQUIRE DELINEATION.
- ③ WITHIN 5 MILES, RELOCATE SIGNS AS WORK PROGRESSES AND NECESSARY OR AS DIRECTED BY THE ENGINEER.
- ④ SIGN NOT REQUIRED IF MOVING OPERATION OCCURS WITHIN A SIGNED ROAD WORK ZONE AREA.
- ⑤ SHADOW VEHICLE 1 (V1) IS OPTIONAL

* PCMS OPTIONAL

PCMS MESSAGING

FRAME 1	FRAME 2
MOVING LANE CLOSURES	NEXT XX MILES

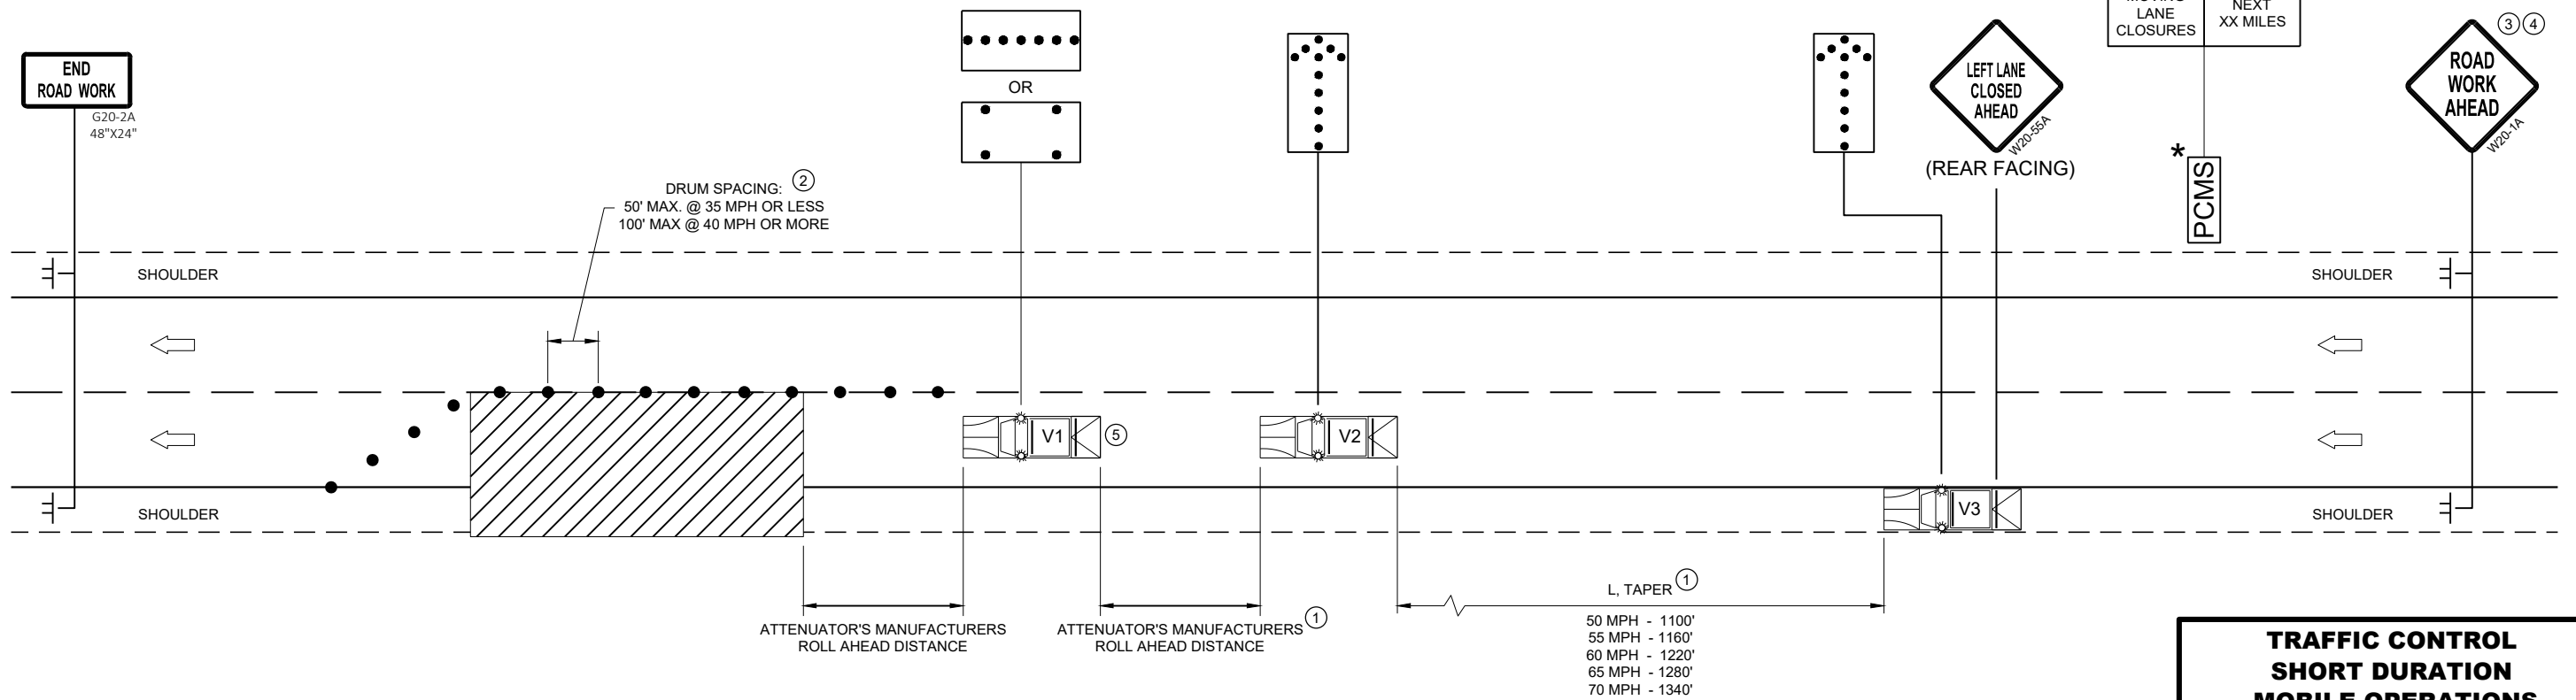

**TRAFFIC CONTROL
SHORT DURATION
MOBILE OPERATIONS**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
August 2021 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

6

6

SDD 15D43 - 02

SDD 15D43 - 02

GENERAL NOTES

DRAWING NOT TO SCALE. ALL SIGNS AND POSTS ON THIS SHEET SHALL BE PAID FOR WITH 'TRAFFIC CONTROL SIGNS' BID ITEM. ALL SIDE ROADS WHICH ARE UNDER CONSTRUCTION OF CURB AND GUTTER AND/OR GRADING SHALL BE ADEQUATELY SIGNED.

ALL SIGNS AND DEVICES SHALL BE IN CONFORMANCE WITH THE WISCONSIN MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (WMUTCD). SIGN LAYOUTS SHALL BE IN ACCORDANCE WITH THE WISDOT STANDARD SIGN PLATES.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THAT THE BACKGROUND IS ORANGE.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS DIRECTED BY THE ENGINEER.

ALL SIGNS INAPPROPRIATE TO THE STATUS OF THE CONTROL ZONE, INCLUDING PRE-EXISTING SIGNS IN THE VICINITY, SHALL BE COVERED OR REMOVED AS DIRECTED BY THE ENGINEER.


SEE 15C34 FOR ADDITIONAL TRAFFIC CONTROL SIGNING WHEN CENTERLINE PAVEMENT MAKINGS ARE MISSING. 'DO NOT PASS' SIGNS MUST BE INSTALLED ON THE SAME DAY AS MILLING OPERATIONS.

- ① PLACE SIGNS 350' IN ADVANCE OF MILLED SURFACES AND AT 1 MILE INTERVALS, OR AS DIRECTED BY THE ENGINEER.
- ② PLACE SIGN 200' MIN. FROM INTERSECTION AND 200' MIN. AFTER ADVANCE WARNING SIGN SHOWN IN SDD 15C04.


LEGEND

⊥ SIGN ON TEMPORARY SUPPORT

⇨ DIRECTION OF TRAFFIC



TYPICAL SIDE ROAD APPROACH SIGN DETAIL



SEE SDD15C04 FOR ADVANCE WARNING SIGNS

SEE SDD15C04 FOR ADVANCE WARNING SIGNS

DETAIL FOR SIGNING ON MILLED SURFACES

TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2020 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

GENERAL NOTES

DRAWING NOT TO SCALE. ALL SIGNS AND POSTS ON THIS SHEET SHALL BE PAID FOR WITH 'TRAFFIC CONTROL SIGNS' BID ITEM. ALL SIDE ROADS WHICH ARE UNDER CONSTRUCTION OF CURB AND GUTTER AND/OR GRADING SHALL BE ADEQUATELY SIGNED.

ALL SIGNS AND DEVICES SHALL BE IN CONFORMANCE WITH THE WISCONSIN MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (WMUTCD). SIGN LAYOUTS SHALL BE IN ACCORDANCE WITH THE WISDOT STANDARD SIGN PLATES.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THAT THE BACKGROUND IS ORANGE.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS DIRECTED BY THE ENGINEER.


ALL SIGNS INAPPROPRIATE TO THE STATUS OF THE CONTROL ZONE, INCLUDING PRE-EXISTING SIGNS IN THE VICINITY, SHALL BE COVERED OR REMOVED AS DIRECTED BY THE ENGINEER.

SEE 15C34 FOR ADDITIONAL TRAFFIC CONTROL SIGNING WHEN CENTERLINE PAVEMENT MAKINGS ARE MISSING. 'DO NOT PASS' SIGNS MUST BE INSTALLED ON THE SAME DAY AS MILLING OPERATIONS.


- ① PLACE SIGNS 350' IN ADVANCE OF CHIP SEALED OR LOOSE GRAVEL SURFACES AND AT 1 MILE INTERVALS, OR AS DIRECTED BY THE ENGINEER.
- ② PLACE SIGN 200' MIN. FROM INTERSECTION AND 200' MIN. AFTER ADVANCE WARNING SIGN SHOWN IN SDD 15C04.
- ③ ADD WO8-1 OR WO8-2 SIGN WHEN THE CONDITION IS PRESENT.

LEGEND

- ⌋ SIGN ON TEMPORARY SUPPORT
- ➡ DIRECTION OF TRAFFIC



TYPICAL SIDE ROAD APPROACH SIGN DETAIL



DETAIL FOR SIGNING ON LOOSE GRAVEL OR CHIP SEALED SURFACES

SEE SDD15C04 FOR ADVANCE WARNING SIGNS





SEE SDD15C04 FOR ADVANCE WARNING SIGNS

TRAFFIC CONTROL SIGNING ON ROADWAYS WITH LOOSE GRAVEL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2021 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER
FHWA

LEGEND

- V1 WORK VEHICLE
- V2 SHADOW VEHICLE
-  TRUCK MOUNTED ATTENUATOR (TMA)
-  FLASHING ARROW PANEL (CAUTION)
-  WORK AREA
-  DIRECTION OF TRAFFIC

POSTED SPEED PRIOR TO WORK STARTING (MPH)	DECISION SIGHT DISTANCE (D)
0 - 25	550'
30	550'
35	700'
40	700'
45	900'
50	900'
55	1200'

GENERAL NOTES

ALL SIGNS ARE 48"X48" UNLESS OTHERWISE NOTED.


MOBILE IS WORK THAT MOVES CONTINUOUSLY OR MOVES AT LEAST THE DECISION SIGHT DISTANCE EVERY 15 MINUTES.

ALL VEHICLES SHALL BE EQUIPPED WITH TWO 360 DEGREE HIGH INTENSITY YELLOW FLASHING LIGHTS OR STROBE LIGHTS AND OPERATED WITH HEADLIGHTS TURNED ON.

ALL ARROW PANELS SHALL BE REAR FACING, TYPE "B" OR "C", AND DISPLAYING THE FLASHING CAUTION MODE. SIGNS PLACED ON VEHICLES MUST NOT OBSCURE THE ARROW PANEL.

USE AN ATTENUATOR ON THE REARMOST VEHICLE THAT BLOCKS ALL OR PART OF THE TRAFFIC LANE.

- ① DISTANCE BETWEEN VEHICLES MAY INCREASE FROM THE ATTENUATOR'S ROLL AHEAD BASED ON TERRAIN, SIGHT DISTANCE, AND OTHER FACTORS. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, SHADOW VEHICLES SHOULD MAINTAIN THE MINIMUM DISTANCE FROM THE WORK VEHICLE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. SHADOW VEHICLES SHOULD SLOW DOWN IN ADVANCE OF VERTICAL OR HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.
- ② ALIGN LEFT SIDE OF SHADOW VEHICLE WITH EDGE OF WORK AREA.



6

6

SDD 15D51 - 01

SDD 15D51 - 01

**TRAFFIC CONTROL,
MOBILE OPERATIONS ON
AN UNDIVIDED ROADWAY**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2021 DATE /S/ Andrew Heidtke
STATEWIDE WORK ZONE TRAFFIC SAFETY ENGINEER

FHWA

NOTES

1. Fixed Message Signs Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - D




2.250" Radius, 0.625" Border, 0.500" Indent

7


7

URBAN AREA


RURAL AREA (See Note 2)




White Edgeline Location



Outside Edge of Gravel



White Edgeline Location



Outside Edge of Gravel

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

GENERAL NOTES

1. Signs wider than 4 feet or 20 sq.ft or larger, shall be mounted on multiple posts. Refer to plate A4-4.
2. If signs are mounted on or behind barrier wall, see A4-10 sign plate.
The Double Arrow sign (W12-1D) shall be mounted at a height of 2'-3" (±). The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Enhanced Reference Markers, Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±).
3. For expressways and freeways, mounting height is 7'- 3" (±) or 6'-3" (±) depending upon existence of a sub-sign.
4. Minimum mounting height for signs mounted on traffic signal poles is 5'- 3" (±).
5. Offset distance shall be consistent with existing signs or consistent throughout length of project.
6. The (±) tolerance for mounting height is 3 inches.
7. Folding signs shall be mounted at a height of 5'-3" (±) or as directed by the Engineer.

* * The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.


* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

TYPICAL INSTALLATION OF PERMANENT TYPE II SIGNS ON SINGLE POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 5/13/2020 PLATE NO. A4-3.22

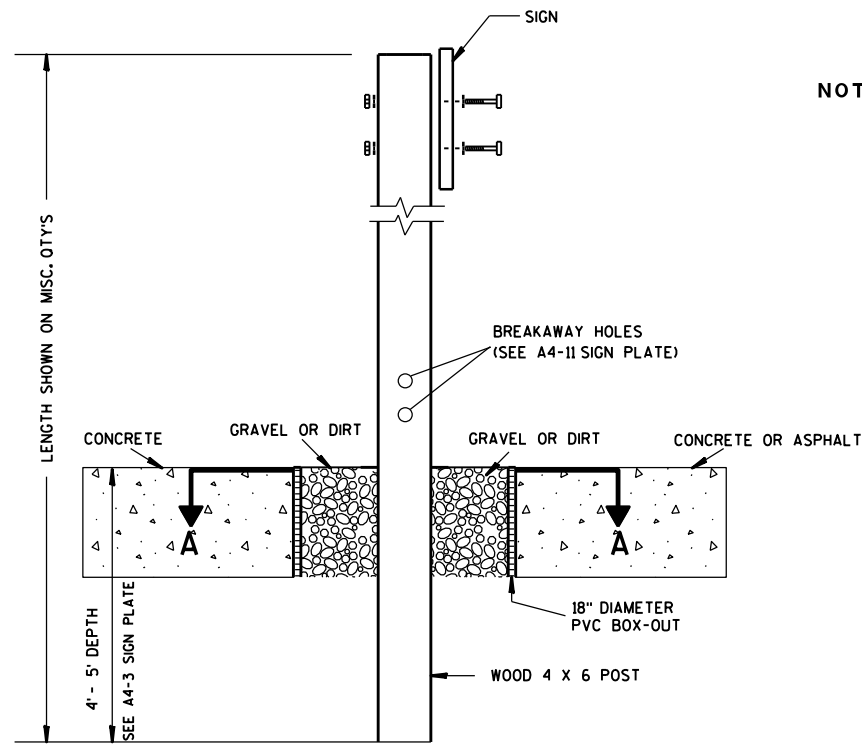

ELEVATION VIEW


DETAIL OF WOOD 4 X 6 SIGN POST IN BOX-OUT

- NOTES:**
1. ALL MATERIAL TO BE APPROVED BY ENGINEER PRIOR TO INSTALLATION
 2. SEE SIGN PLATE A4-8 FOR SIGN HARDWARE REQUIREMENTS
 3. 18 INCH X 18 INCH SQUARE BOX-OUTS MAY BE USED FOR INSTALLATIONS IN EXISTING CONCRETE OR ASPHALT LOCATIONS.

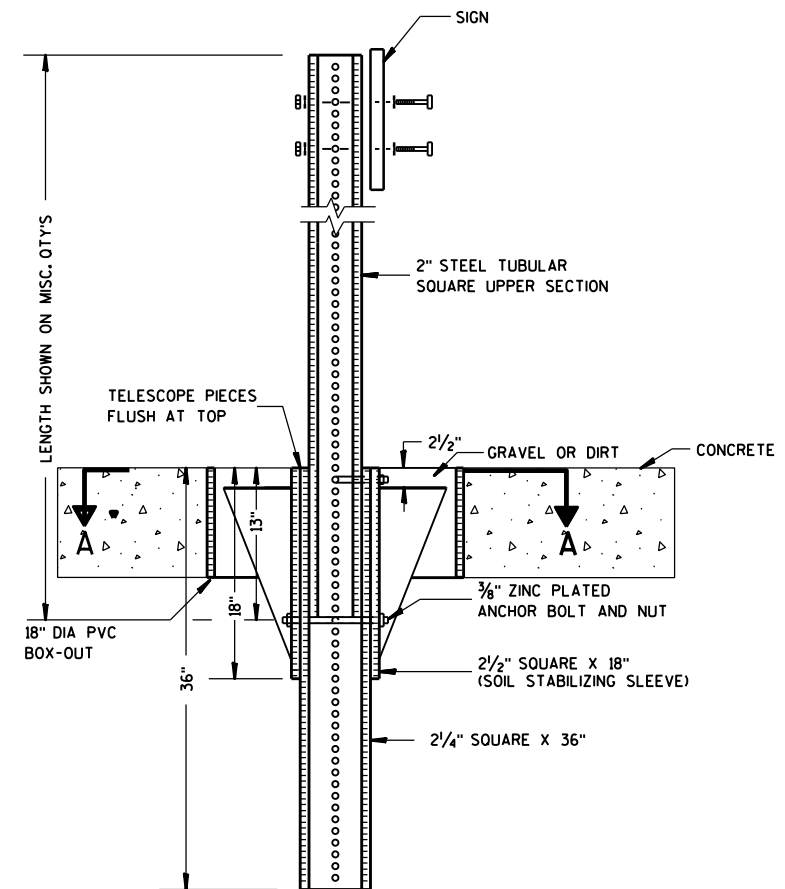

ELEVATION VIEW

DETAIL OF STEEL 2 X 2 SIGN POST IN BOX-OUT

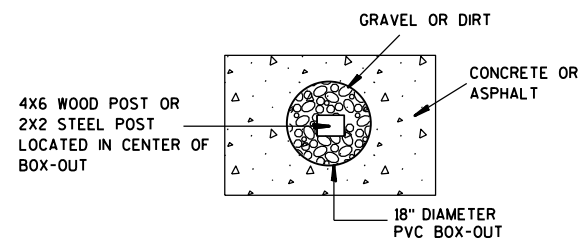

PLAN VIEW


FOR NEW CONCRETE/ ASPHALT INSTALLATIONS

SIGN POST BOX-OUTS A4-3B	
<small>WISCONSIN DEPT OF TRANSPORTATION</small>	
APPROVED <i>Matthew R. Rauch</i> <small>for State Traffic Engineer</small>	
<small>DATE 1/27/14</small>	<small>PLATE NO. A4-3B.1</small>



GENERAL NOTES

1. For 3 or 4 post installations, individual post spacing shall be greater than 3'-6".
2. See tables below for required number of posts.
3. For expressways and freeways, mounting height is 7'-3" (±) or 6'-3" (±) depending upon existence of sub-sign.
4. The (±) tolerance for mounting height is 3 inches.
5. J-Assemblies are considered to be one sign for mounting height.
6. Offset distance shall be consistent with existing signs or consistent throughout length of project.
7. Folding signs shall be mounted at a height of 5'-3" (±) or as directed by the engineer.
8. The Double Arrow sign (W12-1) shall be mounted at a height of 2'-3" (±). The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±).


URBAN AREA

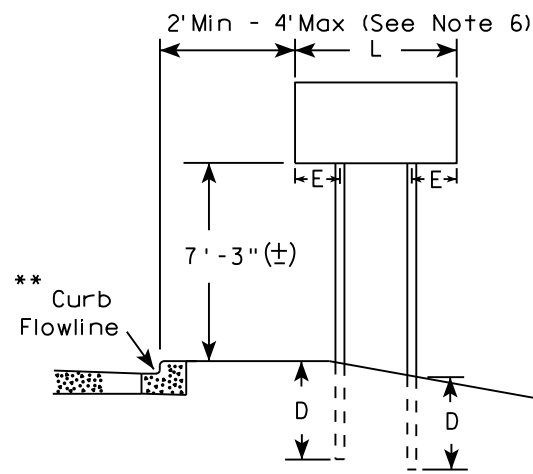


RURAL AREA (See Note 3)

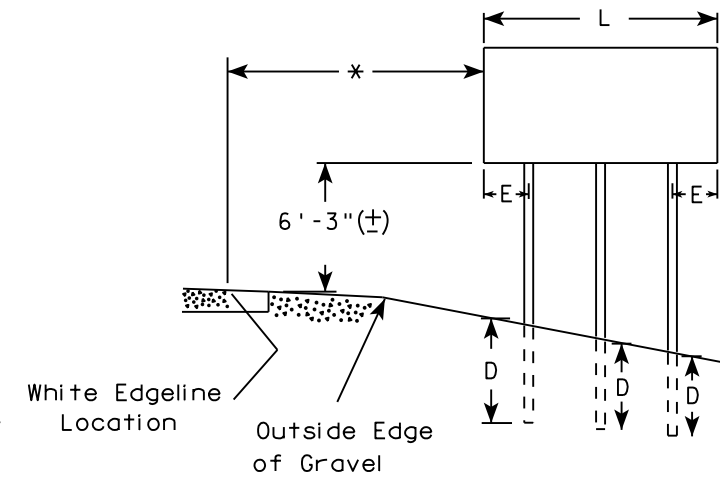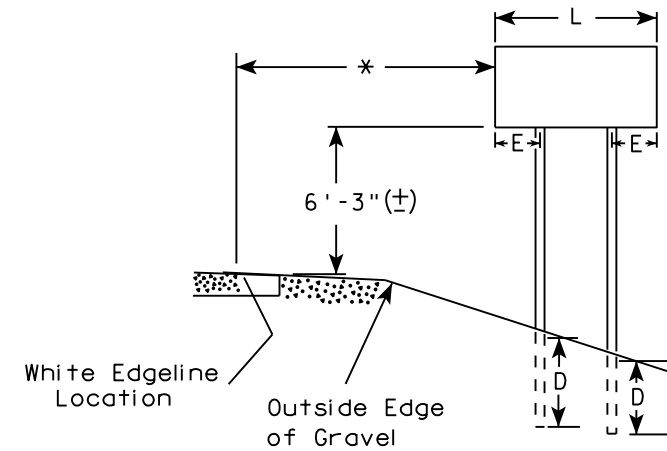

2' Min - 4' Max (See Note 6)

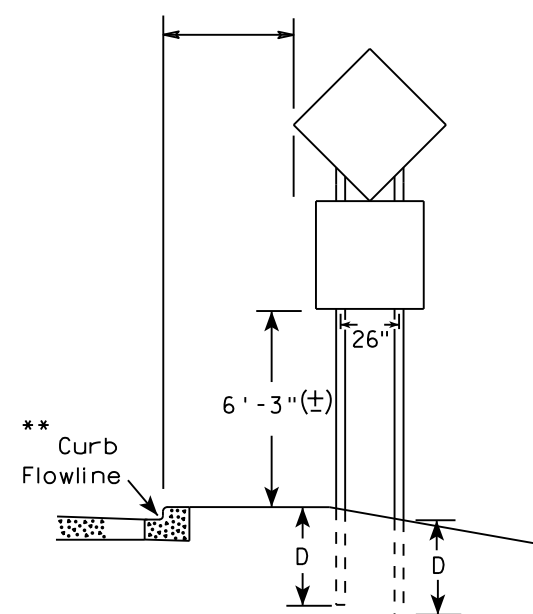

48" DIAMOND WARNING SIGN

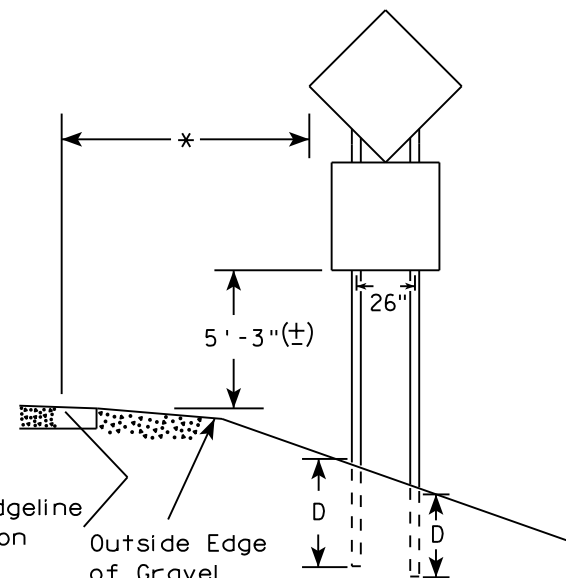

48" DIAMOND WARNING SIGN

* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

** The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.

*** See A4-3 sign plate for signs 4' or less in width and less than 20 S.F. in area.

SIGN SHAPE OTHER THAN DIAMOND (TWO POSTS REQUIRED)	
L	E
Greater than 48" Less than 60"	12"
60" to 108"	L/5


SIGN SHAPE OTHER THAN DIAMOND (THREE POSTS REQUIRED)	
L	E
Greater than 108" to 144"	12"

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

TYPICAL INSTALLATION OF TYPE II SIGNS ON MULTIPLE POSTS


WISCONSIN DEPT OF TRANSPORTATION
 APPROVED *Matthew R. Rauch*
 For State Traffic Engineer
 DATE 8/21/17 PLATE NO. A4-4.15



Nuts, bolts and lags used for mounting signs shall have hexagonal heads and shall be either :

- a. Hot dip galvanized in accordance with ASTM Designation: A 153, Class D, or SC 3
- b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3.

Threads on bolts and nuts shall be manufactured with sufficient allowance for the cadmium plate or galvanized coating to permit the nuts to run freely on the bolts.



STRINGER BOLTING TO ALUMINUM SIGNS (SEE SIGN PLATE A4-18)

MACHINE BOLTS - 5/16" X 1-3/4" Length w/ lock nuts

WOOD POSTS (4" x 6")

LAG SCREWS - 3/8" X 3" (NO STRINGERS ON BACK OF SIGN)
 3/8" X 4" (STRINGERS ON BACK OF SIGN)

SQUARE STEEL POSTS (2" x 2")

MACHINE BOLTS - 3/8" X 3-1/4" Length w/ nuts (NO STRINGER ON BACK OF SIGN)
 3/8" X 5" Length w/ nuts (STRINGERS ON BACK OF SIGN)

RIVETS - 9/32" (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM BODY/MANDREL
 O.D. FLANGE .720-.765 INCH, GRIP RANGE .042-.375 INCH

WASHERS (ALL POSTS) -


1-1/4" O.D. X 3/8" I.D. X 1/16" STEEL
 1-1/4" O.D. X 3/8" I.D. X .080 NYLON

* Two different fastening systems are shown for illustration purposes. On any individual sign, either one or the other system shall be used. Actual number of fasteners per sign varies with the sign area, but normally there are two. For a single post installation, all signs greater than 9 sq. ft. require the use of 3 fasteners.


ATTACHMENT OF SIGNS TO POSTS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R Rauch</i> For State Traffic Engineer
DATE 4/1/2020	PLATE NO. A4-8.9

**TELESCOPIC TUBING ANCHORS
TWO PIECE SYSTEM**


2 1/4" SQUARE
12 GAUGE
PERFORATED
GALVANIZED FINISH

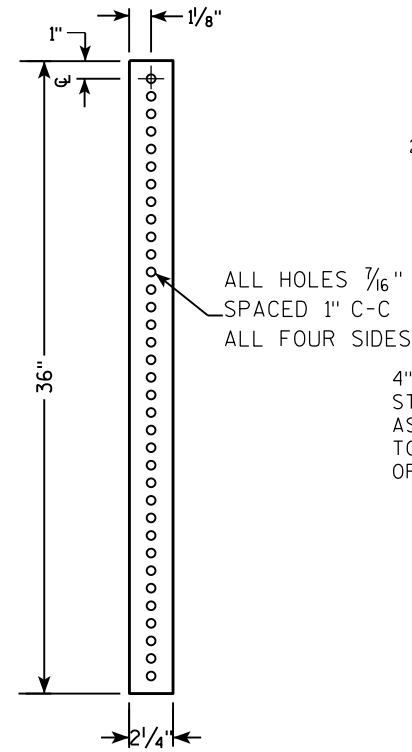



2 1/2" SQUARE
12 GAUGE
OMNI-DIRECTIONAL
PERFORATED
SOIL STABILIZING SLEEVE
GALVANIZED FINISH

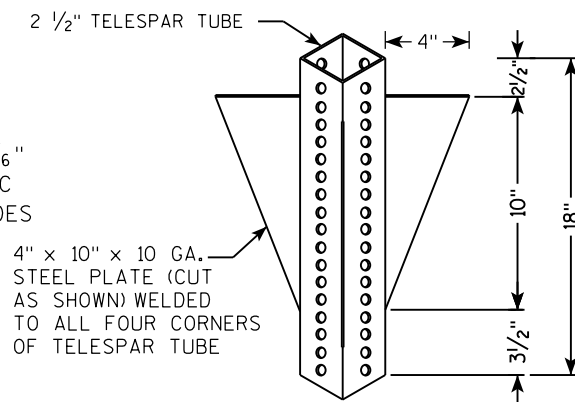

**DETAIL OF TUBULAR STEEL SIGN POST
(IN POURED CONCRETE OR ASPHALT)**

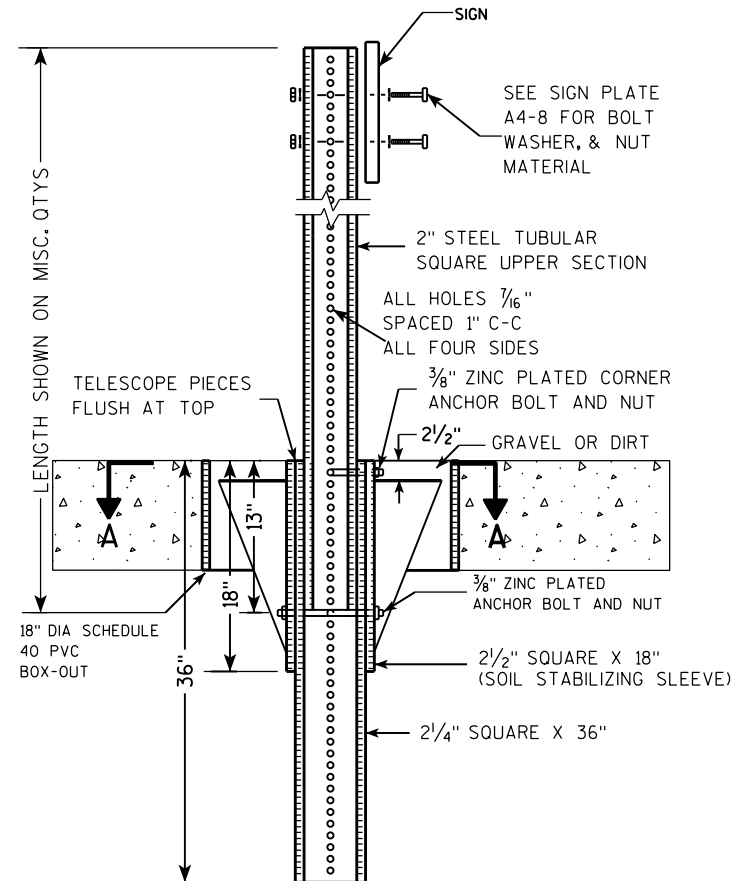

**DETAIL OF TUBULAR STEEL SIGN POST
(IN LOCATIONS OTHER THAN POURED CONCRETE OR ASPHALT)**

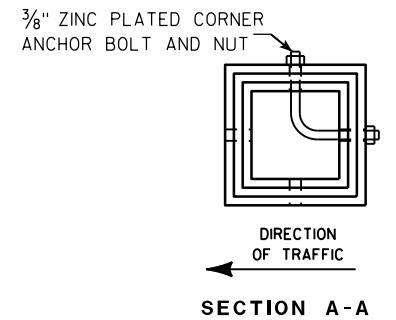

Area of Sign Installation (Sq. Ft.)	Number of Required Posts
9 or less	1
Greater than 9 less than or equal to 18	2
Greater than 18 less than or equal to 27	3



Signs wider than 3 feet or larger than 9 sq. ft shall be mounted on multiple posts (see above table).

**TUBULAR STEEL
SIGN POST
A4-9**

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 2/05/15 PLATE NO. A4-9.9

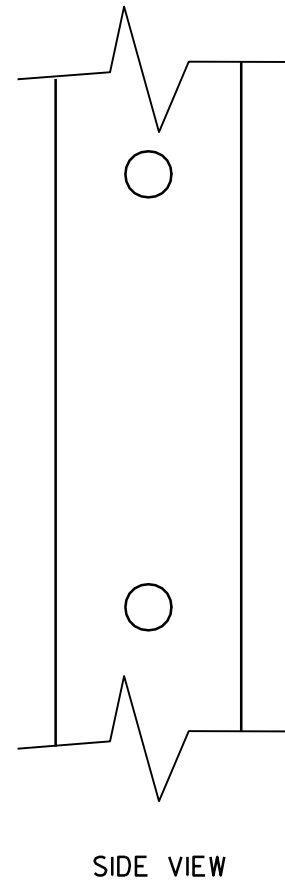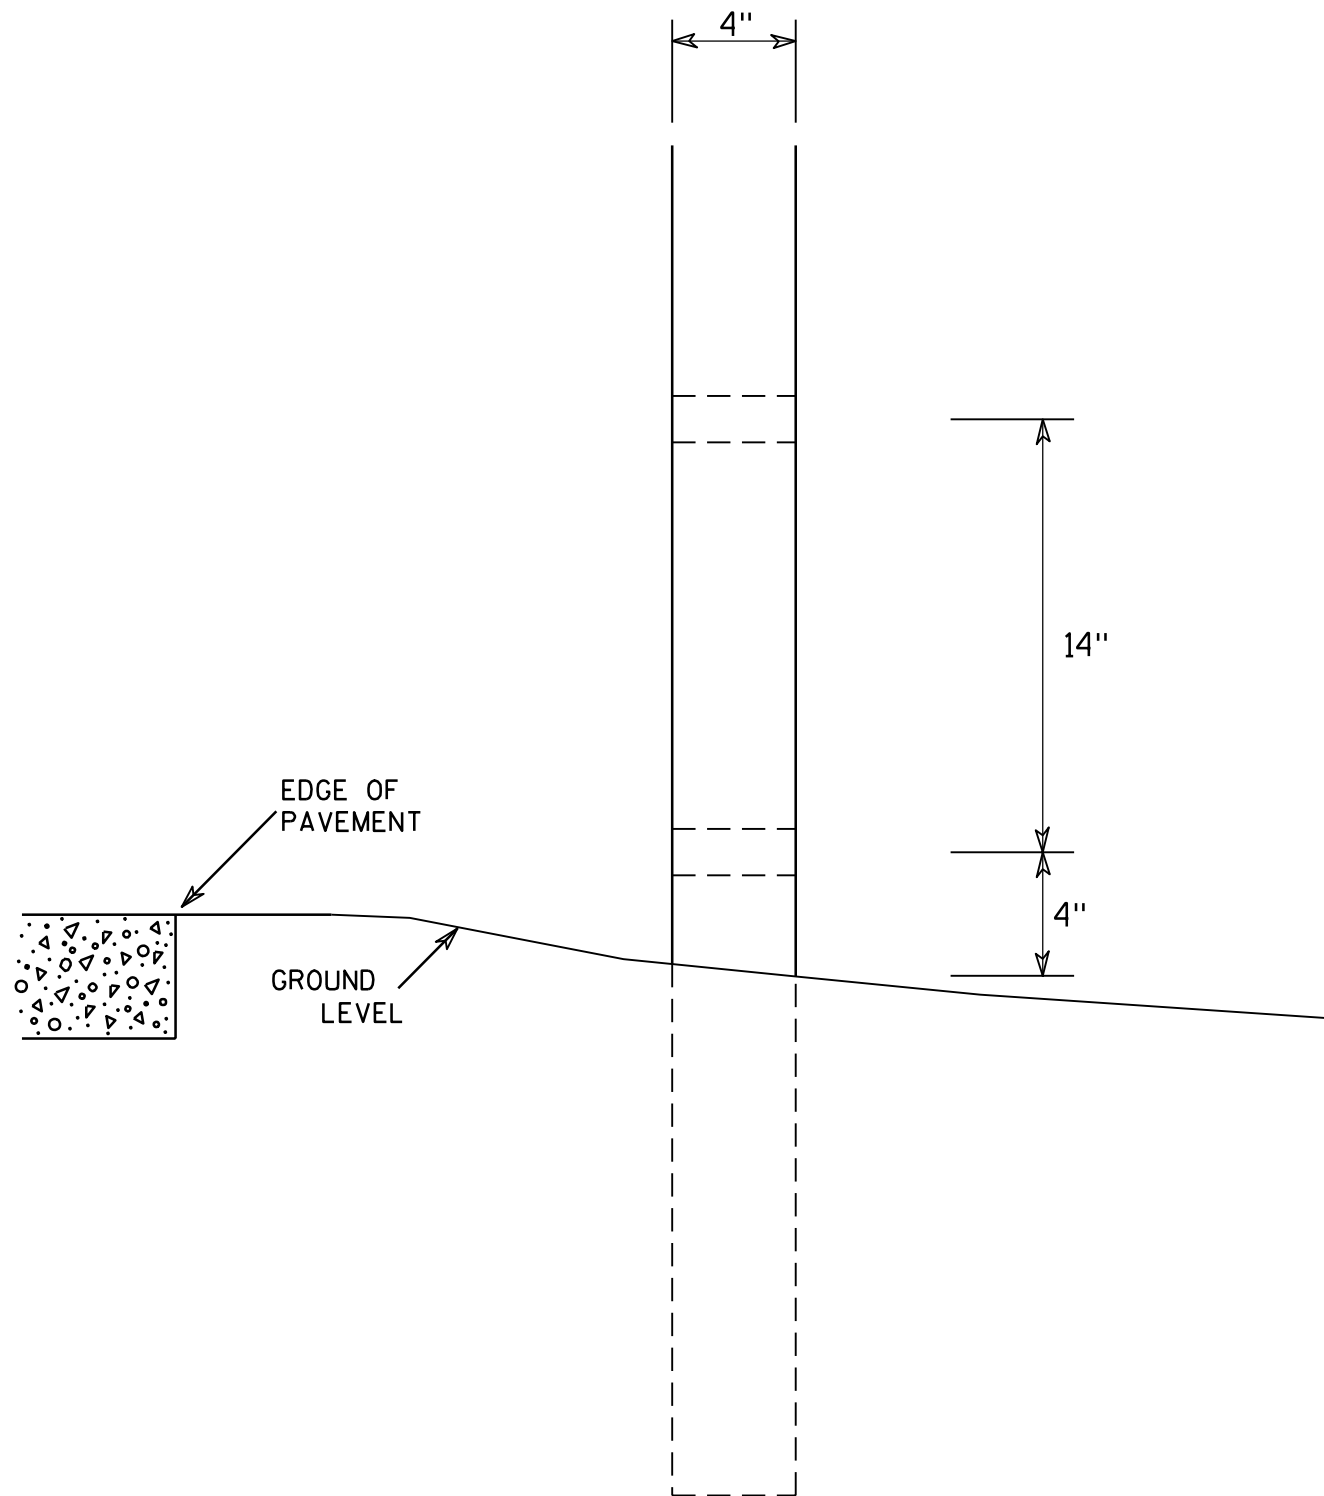

GENERAL NOTES

1. All 4 x 6 Wood Posts shall be modified by having two 1½" diameter holes drilled perpendicular to the roadway centerline.

7





7

4 X 6 WOOD POST MODIFICATIONS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Chester J. Spang</i> for State Traffic Engineer
DATE 3/27/97	PLATE NO. A4-11.2

SIGN LAYOUT WITH VARIOUS SIZED MESSAGES

GENERAL NOTES



- Materials shall conform to Standard Specification Section 637.
Base - Sheet Aluminum 0.040" Thickness
Sheeting - Orange Type F Reflective
Arrow - Black Non-Reflective
- Arrow signs shall be fastened to permanent sign by either aluminum rivets or aluminum self-tapping sheet metal screws. There shall be a minimum of 2 fasteners used per arrow sign.
- There shall be a spacer consisting of a 0.08" nylon washer between the back of the arrow sign and the face of the permanent sign.
- Arrows are per standard plate A1-2
- Use separate arrow sign for each destination
- Tilt arrow is always at 45 degrees
- Arrow is centered on arrow sign



Lower Case Copy Size	Standard Width (Single Arrow)	2 Line Tilt Arrow Cover Width	3 Line Tilt Arrow Cover Width	Height
3 3/4" Series C	8	9 1/2	14 1/2	8
4 1/2" Series D & E	9 1/2	10	15	9 1/2
6" Series D & E	14	16	20 1/2	14
8" Series E	17 1/2	20 1/2	25	17 1/2

BEFORE

AFTER



DESTINATION DIRECTIONAL ARROW FOR DETOUR SIGNS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED


Matthew R. Rauch
For State Traffic Engineer

DATE 10/08/14

PLATE NO. A4-12.2

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - Line 1 is D and Line 2 is C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Round distance to nearest whole Mile and substitute appropriate numerals and optically adjust spacing to achieve proper balance



G20-51

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	60	24	1 3/8	1/2	5/8	6	4 1/2	3 3/4	16 1/4	16 1/8	16	18 5/8															10
3																											
4	60	24	1 3/8	1/2	5/8	6	4 1/2	3 3/4	16 1/4	16 1/8	16	18 5/8															10
5																											

STANDARD SIGN
G20-51

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R Rauch*
for State Traffic Engineer

DATE 3/14/17 PLATE NO. G20-51.2

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - D
4. Substitute appropriate numeral and adjust spacing to achieve proper balance.



G20-57

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2																											
3	72	36	1 1/8	1/2	5/8	6	5	4	15 5/8	1 5/8	5	9 1/4	21 1/4	3 1/2	1 1/2	23 1/4		29 7/8	1 3/4	3 1/4	28 1/2					18.0	
4	96	48	2 1/4	3/4	1	8	6 1/2	5 1/2	20 5/8	2 1/4	6	12 1/4	28 1/4	4 3/8	1 5/8	31		39 1/4	2	4	37 7/8					32.0	
5																											

STANDARD SIGN
G20-57

WISCONSIN DEPT OF TRANSPORTATION



APPROVED *Matthew R Rauch*
For State Traffic Engineer

DATE 1/22/19 PLATE NO. G20-57.3

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

NOTES

1. Sign is Type II - Type H Reflective
2. Color:
Background - White
Message - Black
3. Message Series - D except 3 number signs Series C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.



SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24		1 1/2			12	5 1/2	6 1/2	10 1/4	2 1/2	8 7/8	11 1/2	1	1 7/8	11 1/4	21 7/8											4.0
3	36		2 1/4			18	8 3/4	9 1/4	15 3/8	5 3/8	12 5/8	17 1/8	1 1/2	2 7/8	16 7/8	33											9.0
4	36		2 1/4			18	8 3/4	9 1/4	15 3/8	5 3/8	12 5/8	17 1/8	1 1/2	2 7/8	16 7/8	33											9.0
5	36		2 1/4			18	8 3/4	9 1/4	15 3/8	5 3/8	12 5/8	17 1/8	1 1/2	2 7/8	16 7/8	33											9.0

STATE ROUTE MARKER
M1-6 FOR ASSEMBLIES

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 3/16/18 PLATE NO. M1-6.10


PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

7


7

NOTES

- All Signs Type II - Type H
- Color:
 - Background - See note 5
 - Message - See note 5
- Message Series - C
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- M3-1 thru M3-4 Background - White
 Message - Black
 MB3-1 thru MB3-4 Background - Blue
 Message - White
 MK3-1 thru MK3-4 Background - Green
 Message - White
 MM3-1 thru MM3-4 Background - White
 Message - Green
 MN3-1 thru MN3-4 Background - Brown
 Message - White
 MP3-1 thru MP3-4 Background - White
 Message - Blue
- Note the first letter of each direction is larger than the remainder of the message.

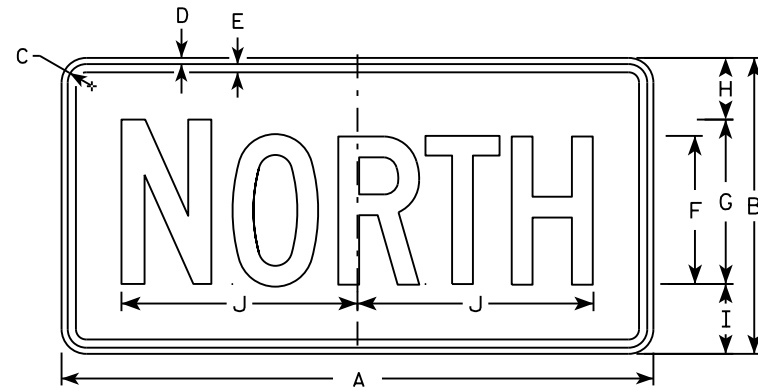


M3-1
MM3-1
MP3-1

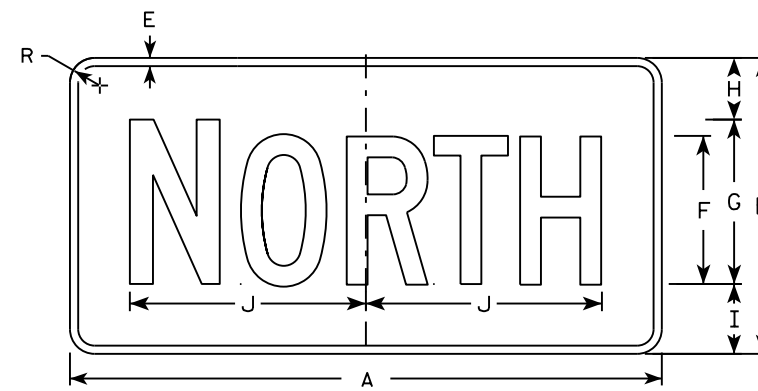


MB3-1
MK3-1
MN3-1




M3-2
MM3-2
MP3-2




MB3-2
MK3-2
MN3-2




M3-3
MM3-3
MP3-3



MB3-3
MK3-3
MN3-3



M3-4
MM3-4
MP3-4



MB3-4
MK3-4
MN3-4

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24	12	1 1/8	3/8	3/8	6	7	2 1/4	2 3/4	10 1/4	7 7/8	8 3/8	10 1/4	9 3/4	8 3/4			1 1/2									2.00
3	36	18	1 1/8	3/8	1/2	9	10	3 3/4	4 1/4	14 3/8	12	12 1/8	14	14 1/8	13			1 1/2									4.5
4	36	18	1 1/8	3/8	1/2	9	10	3 3/4	4 1/4	14 3/8	12	12 1/8	14	14 1/8	13			1 1/2									4.5
5	36	18	1 1/8	3/8	1/2	9	10	3 3/4	4 1/4	14 3/8	12	12 1/8	14	14 1/8	13			1 1/2									4.5

STANDARD SIGNS
M3-1 thru M3-4
SERIES


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 10/15/15 PLATE NO. M3-1.14

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - B
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.



M4-8

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24	12	1 1/8	3/8	3/8	6	3	10	10 1/4																		2.0
3	36	18	1 1/8	3/8	1/2	9	4 1/2	14 5/8	14 1/2																		4.5
4																											
5																											

STANDARD SIGN
M4-8

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 11/10/10 PLATE NO. M4-8.2

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - B
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.



7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24	18	1 1/8	3/8	1/2	6	2	2	4 3/4	9 3/4																	3.0
3	30	24	1 1/8	3/8	1/2	8	2 1/2	3	6 3/4	13																	5.0
4																											
5																											

STANDARD SIGN
M4-8A

WISCONSIN DEPT OF TRANSPORTATION



APPROVED *Matthew R Rauch*
for State Traffic Engineer

DATE 3/9/11 PLATE NO. M4-8A.2

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. M4-9L is the same as M4-9R except the arrow is reversed.



Arrow Detail

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	30	24	1 1/8	3/8	1/2	5	4	7	8	11 1/2	12	9	3/4	4 7/8													5.00
3	30	24	1 1/8	3/8	1/2	5	4	7	8	11 1/2	12	9	3/4	4 7/8													5.00
4	48	36	1 3/8	1/2	5/8	8	6	10 1/2	11 5/8	20 5/8	20 1/2	13 1/4	1 1/8	6 7/8													12.0
5	48	36	1 3/8	1/2	5/8	8	6	10 1/2	11 5/8	20 5/8	20 1/2	13 1/4	1 1/8	6 7/8													12.0


STANDARD SIGN
M4-9 R & L

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 3/9/11 PLATE NO. M4-9R.4


PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

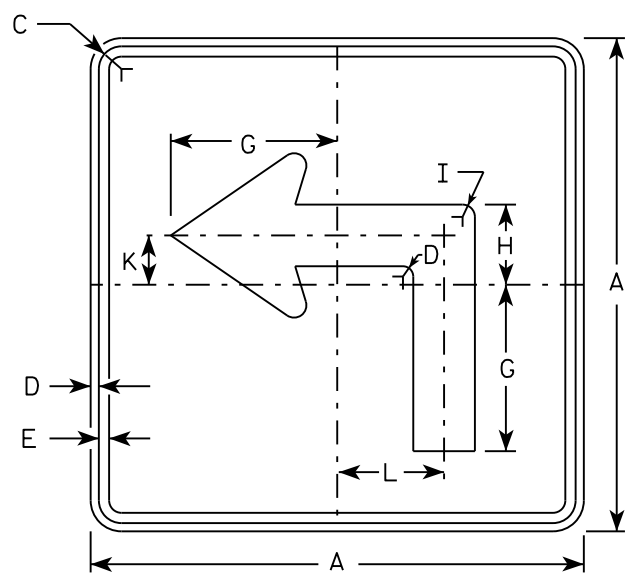


M5-1L
MM5-1L
M05-1L
MP5-1L




M5-2L
MM5-2L
M05-2L
MP5-2L

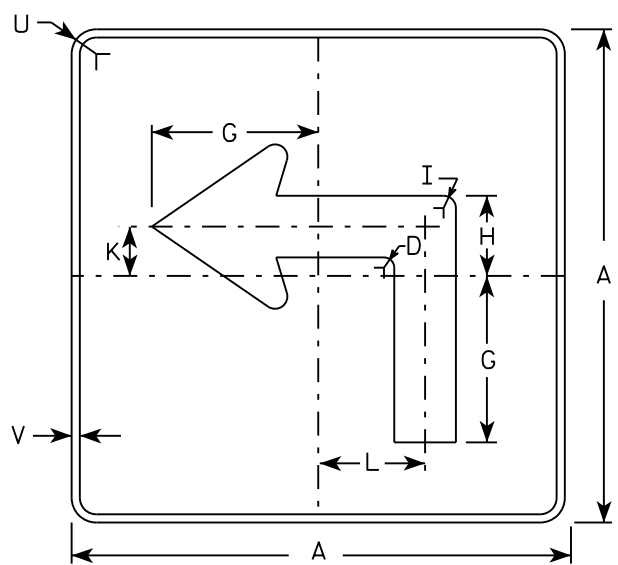

MB5-1L
MK5-1L
MN5-1L
MR5-1L



MB5-2L
MK5-2L
MN5-2L
MR5-2L

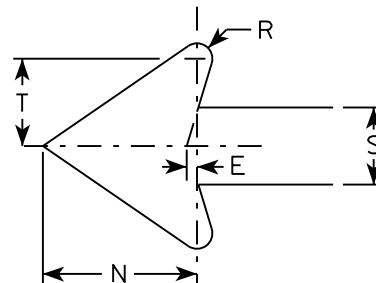

NOTES

- Signs are Type II - Type H reflective except as shown
- Color:
 - Background - See note 4
 - Message - See note 4
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- M5-1 and M5-2 Background - White
Message - Black
 - MB5-1 and MB5-2 Background - Blue
Message - White
 - MK5-1 and MK5-2 Background - Green
Message - White
 - MM5-1 and MM5-2 Background - White
Message - Green
 - MN5-1 and MN5-2 Background - Brown
Message - White
 - M05-1 and M05-2 Background - Orange - Type F Reflective
Message - Black
 - MP5-1 and MP5-2 Background - White - Type H Reflective
Message - Blue
 - MR5-1 and MR5-2 Background - Brown
Message - Yellow
- M5-1R same as M5-1L except arrow points right.
- M5-2R same as M5-2L except arrow tilts right.


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	21		1 1/8	3/8	3/8		7	3 3/8	5/8		2 1/8	4 1/2	6 3/8	5 1/4	5	2 1/2		1/2	2 5/8	3	1 1/2	1/2					3.06
3	30		1 3/8	1/2	5/8		10 1/8	4 7/8	7/8		3	6 1/2	9 1/8	7 1/2	7 1/4	3 1/2		3/4	3 3/4	4 1/4	1 7/8	1/2					6.25
4	30		1 3/8	1/2	5/8		10 1/8	4 7/8	7/8		3	6 1/2	9 1/8	7 1/2	7 1/4	3 1/2		3/4	3 3/4	4 1/4	1 7/8	1/2					6.25
5	30		1 3/8	1/2	5/8		10 1/8	4 7/8	7/8		3	6 1/2	9 1/8	7 1/2	7 1/4	3 1/2		3/4	3 3/4	4 1/4	1 7/8	1/2					6.25

STANDARD SIGN
M5-1 & M5-2


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 10/15/15 PLATE NO. M5-1.13

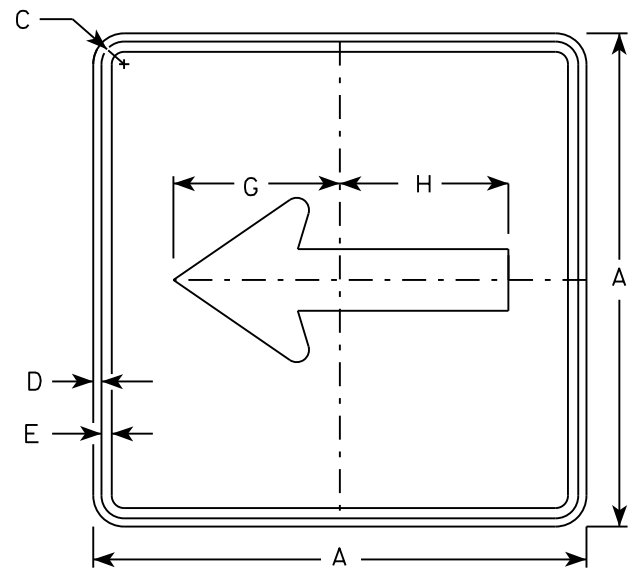


M6-1
MM6-1
M06-1
MP6-1

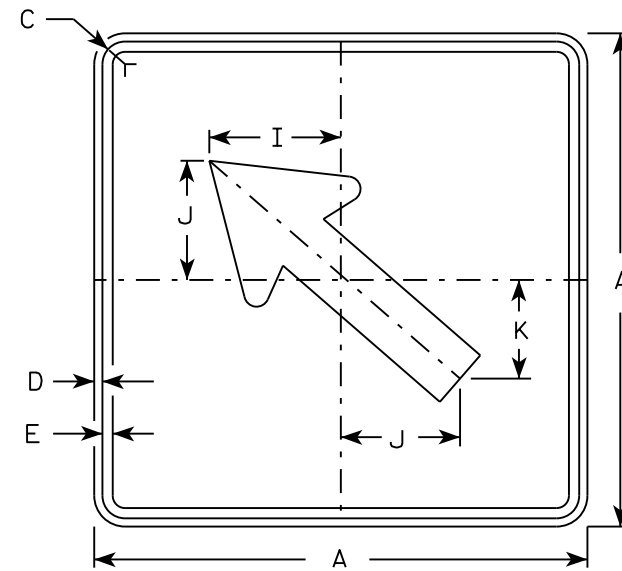


M6-2
MM6-2
M06-2
MP6-2

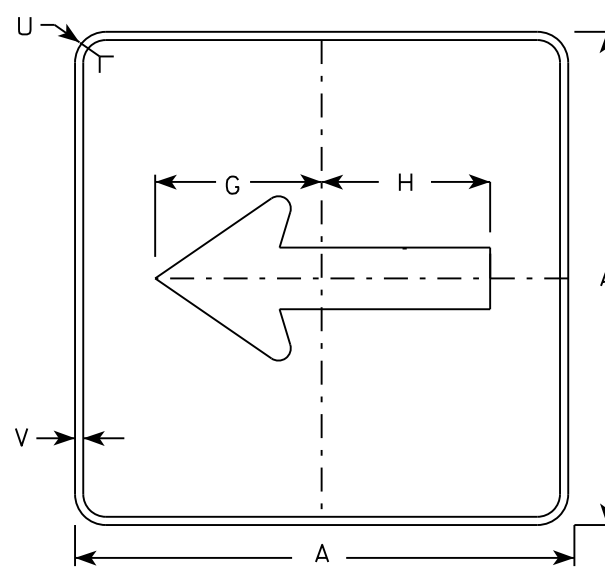

MB6-1
MK6-1
MN6-1
MR6-1

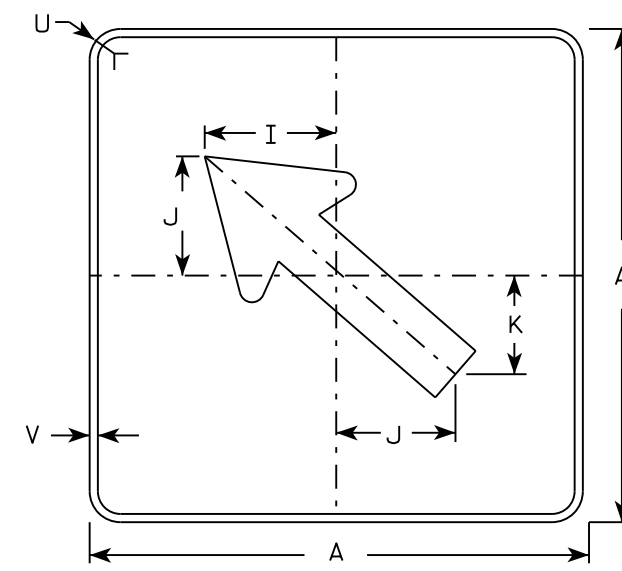

MB6-2
MK6-2
MN6-2
MR6-2



NOTES

- Signs are Type II - Type H except as Shown
- Color:
Background - See note 4
Message - See note 4
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- M6-1 and M6-2 Background - White
Message - Black
MB6-1 and MB6-2 Background - Blue
Message - White
MK6-1 and MK6-2 Background - Green
Message - White
MM6-1 and MM6-2 Background - White
Message - Green
MN6-1 and MN6-2 Background - Brown
Message - White
M06-1 and M06-2 Background - Orange - Type F Reflective
Message - Black
MP6-1 and MP6-2 Background - White
Message - Blue
MR6-1 and MR6-2 Background - Brown
Message - Yellow

7


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	21		1 1/8	3/8	3/8		7 1/2	7 1/8	5 5/8	5	4 1/4	5 1/4	3	2 5/8	1/2						1 1/2	1/2					3.06
3	30		1 3/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4						1 7/8	1/2					6.25
4	30		1 3/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4						1 7/8	1/2					6.25
5	30		1 3/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4						1 7/8	1/2					6.25

STANDARD SIGN
M6-1 & M6-2
SERIES

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 10/15/15 PLATE NO. M6-1.15

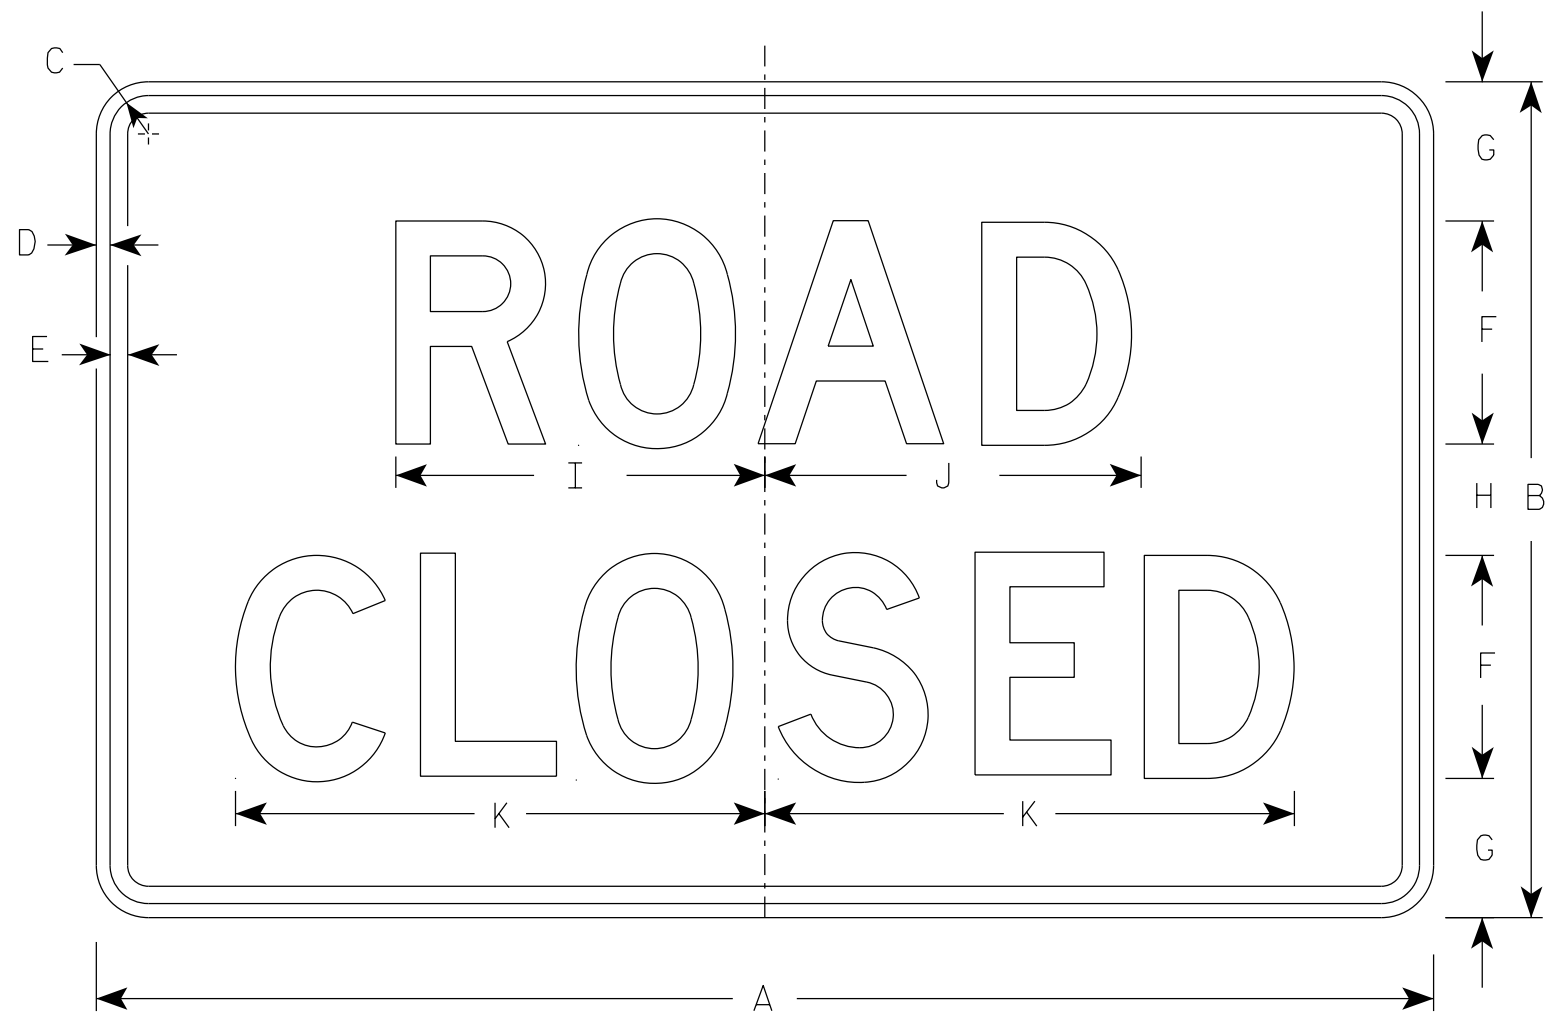


R11-2



R11-2R



R11-2T

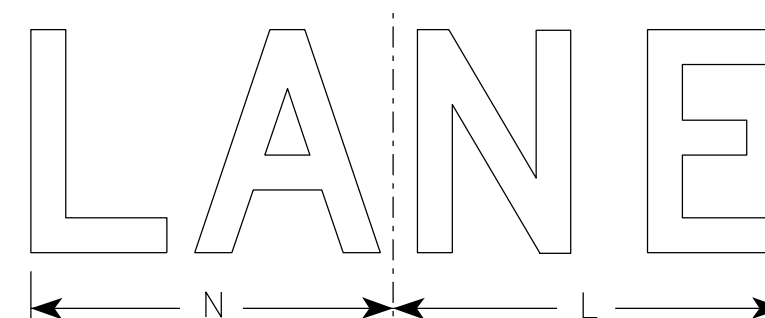

R11-2L

NOTES

1. Sign is Type II - Type H Reflective
2. Color:
Background - White
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Modify the message as required.

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
2M	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
3	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
4	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
5	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0

STANDARD SIGN
R11-2

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R Rauch*
For State Traffic Engineer

DATE 3/29/2021 PLATE NO. R11-2.11

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**


NOTES

1. Sign is Type II - Type H Reflective
2. Color:
Background - White
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Substitute appropriate numerals to nearest quarter mile and optically adjust spacing to achieve proper balance.



** See Note 5

R11-3B



SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36	18	1 3/8	1/2	5/8	4	3	2 1/2	2	2	13 1/4	2 1/4	3	8	8	1 1/2	2	10 3/4	8 3/8	4 3/4	6 1/2	2	6 3/4	7 1/8		4.5	
2S	60	30	1 3/8	1/2	5/8	6	5	4	4 1/4	3 3/8	20 1/8	3	5	12	13 1/4	1 3/4	3	17 3/8	13 1/8	8	10	3 1/2	11	11 7/8		12.5	
2M	60	30	1 3/8	1/2	5/8	6	5	4	4 1/4	3 3/8	20 1/8	3	5	12	13 1/4	1 3/4	3	17 3/8	13 1/8	8	10	3 1/2	11	11 7/8		12.5	
3																											
4																											
5																											

STANDARD SIGN
R11-3B

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 3/21/17 PLATE NO. R11-3B.3

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**


NOTES

1. Sign is Type II - Type H Reflective
2. Color:
Background - White
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Substitute appropriate numerals to nearest quarter mile and optically adjust spacing to achieve proper balance.



R11-3C

** See Note 5



SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36	15	1 3/8	1/2	5/8	4	3	2 1/2	13 1/4	2 1/4	3	8	8	1 1/2	2	10 3/4		7 1/8									3.75
2S	60	24	1 3/8	1/2	5/8	6	5	4	20 1/8	3	5	12	13 1/4	1 3/4	3	17 3/8		11 7/8									10.0
2M	60	24	1 3/8	1/2	5/8	6	5	4	20 1/8	3	5	12	13 1/4	1 3/4	3	17 3/8		11 7/8									10.0
3																											
4																											
5																											

STANDARD SIGN
R11-3C

WISCONSIN DEPT OF TRANSPORTATION

APPROVED
Matthew R. Rauch
For State Traffic Engineer

DATE 7/28/16 PLATE NO. R11-3C.3


PROJECT NO:

SHEET NO:

E

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.



R11-4

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	60	30	1 3/8	1/2	5/8	6	5	4	2 1/2	16 1/8		7/8	23 3/8	3 1/4	3	16 3/4	5 1/4	2 1/4	24 1/4								12.5
2M	60	30	1 3/8	1/2	5/8	6	5	4	2 1/2	16 1/8		7/8	23 3/8	3 1/4	3	16 3/4	5 1/4	2 1/4	24 1/4								12.5
3																											
4																											
5																											






STANDARD SIGN
R11 - 4

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Raush*
for State Traffic Engineer

DATE 4/1/11 PLATE NO. R11-4.3

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ E



NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - See note 5
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Line 1 is Series D.
Line 2 is Series D for AHEAD and Series C for all other distances.

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	6	5	1	2 1/4	14 3/4	15	11 5/8	9	1 3/8	1 7/8	5 5/8	10 1/8	2 1/2	1 1/8	4 1/2	3 1/2	8	1 3/4	10 3/4			9.0
2S	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
2M	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
3	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
4	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
5	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0


STANDARD SIGN
W20-2A, B, C, D, F & G

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Raub*
for State Traffic Engineer

DATE 3/18/11 PLATE NO. W20-2.6


PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ E




W20-3A




W20-3D




W20-3C



W20-3B



W20-3G



W20-3F

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - see note 5
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Lines 1 and 2 are Series D.
Line 3 is Series D for AHEAD and Series C for all other distances.

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	5	3 3/8	3 1/2	1 1/8	4	8 3/8	8 7/8	12 1/2	11	9	6	10 1/8	2 1/2	1 7/8	5 5/8	8	1 3/8	4 1/2	3 1/2	10 3/4	1 3/4	9.0
2S	48		2 1/4	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
2M	48		2 1/4	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
3	48		2 1/4	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
4	48		2 1/4	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
5	48		2 1/4	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0

STANDARD SIGN
W20-3A, B, C, D, F & G

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 3/18/11 PLATE NO. W20-3.7

DIVISION 1 - ALI-STH 173


STATION	REAL STATION	DISTANCE	AREA (SF)			INCREMENTAL VOL (CY) (UNADJUSTED)			CUMULATIVE VOL (CY)		
			CUT	SALVAGED/UNUSABLE PAVEMENT MATERIAL	FILL	CUT	SALVAGED/UNUSABLE PAVEMENT MATERIAL	FILL	CUT	EXPANDED FILL	MASS ORDINATE
NOTE 1	NOTE 2	NOTE 3	NOTE 1	NOTE 8							
1288+80.141	128880.14	0.00	0.00	0.00	0.00	0	0	0	0	0	0
1289+00	128900.00	19.86	0.00	0.00	0.00	0	0	0	0	0	0
1289+54.875	128954.88	54.88	0.00	0.00	3.07	0	0	3	0	4	-4
1289+79.875	128979.88	25.00	0.00	0.00	4.50	0	0	4	0	9	-9
1290+00	129000.00	20.13	0.00	0.00	4.10	0	0	3	0	13	-13
1290+04.875	129004.88	4.88	0.00	0.00	2.54	0	0	1	0	14	-14
1290+08	129008.00	3.13	0.00	0.00	2.34	0	0	0	0	14	-14
1290+11.125	129011.13	3.13	0.00	0.00	1.34	0	0	0	0	14	-14
1290+33	129033.00	21.88	0.00	0.00	0.00	0	0	1	0	15	-15
1290+36.125	129036.13	3.13	0.00	0.00	0.00	0	0	0	0	15	-15
1290+58	129058.00	21.88	0.00	0.00	0.00	0	0	0	0	15	-15
1290+61.125	129061.13	3.13	0.00	0.00	0.00	0	0	0	0	15	-15
1290+64.25	129064.25	3.13	0.00	0.00	0.00	0	0	0	0	15	-15
1290+70.5	129070.50	6.25	0.10	0.00	0.00	0	0	0	0	15	-15
1290+75	129075.00	4.50	0.58	0.00	0.00	0	0	0	0	15	-15
1290+76.75	129076.75	1.75	0.78	0.00	0.00	0	0	0	0	15	-15
1290+83	129083.00	6.25	0.50	0.00	0.00	0	0	0	0	15	-15
1290+89.369	129089.37	6.37	0.40	0.00	0.00	0	0	0	0	15	-15
1290+91.99	129091.99	2.62	0.38	0.00	0.00	0	0	0	0	15	-15
1290+92	129092.00	0.01	0.80	0.00	0.00	0	0	0	0	15	-15
1290+93	129093.00	1.00	0.95	0.00	0.00	0	0	0	0	15	-15
1290+95	129095.00	2.00	1.13	0.00	0.00	0	0	0	0	15	-15
1291+00	129100.00	5.00	0.90	0.00	0.00	0	0	0	0	15	-15
1291+05.745	129105.75	5.75	19.07	5.67	0.00	2	1	0	2	15	-14
1291+25	129125.00	19.25	90.19	5.67	0.00	39	4	0	41	15	21
1291+44.388	129144.39	19.39	177.06	5.67	0.00	96	4	0	137	15	113
1291+50	129150.00	5.61	176.41	5.67	0.00	37	1	0	174	15	149
1291+59.365	129159.36	9.36	173.32	5.67	0.00	61	2	0	235	15	208
1291+72.144	129172.14	12.78	173.45	5.67	0.00	82	3	0	317	15	287
1291+85.07	129185.07	12.93	173.83	5.67	0.00	83	3	0	400	15	367
1292+00	129200.00	14.93	148.32	5.67	0.00	89	3	0	489	15	453
1292+25	129225.00	25.00	12.14	5.67	4.59	74	5	2	563	18	520
1292+37	129237.00	12.00	0.00	5.67	2.80	3	3	2	566	20	517
1292+37.01	129237.01	0.01	0.00	5.67	1.74	0	0	0	566	20	517
1292+51.75	129251.75	14.74	0.00	5.67	0.58	0	3	1	566	21	513
1292+72	129272.00	20.25	0.00	0.00	0.00	0	2	0	566	21	511
1292+76.75	129276.75	4.75	0.00	0.00	0.00	0	0	0	566	21	511
1292+97	129297.00	20.25	0.00	0.00	0.00	0	0	0	566	21	511
1293+00	129300.00	3.00	0.00	0.00	1.34	0	0	0	566	21	511
1293+01.75	129301.75	1.75	0.00	0.00	1.82	0	0	0	566	21	511
1293+22	129322.00	20.25	0.00	0.00	3.49	0	0	2	566	24	508
1293+95.378	129395.38	73.38	0.15	0.00	0.00	0	0	5	566	30	502
						566	24		30		

DIVISION 1 - ALI-STH 173

STATION	REAL STATION	DISTANCE	AREA (SF)			INCREMENTAL VOL (CY) (UNADJUSTED)			CUMULATIVE VOL (CY)		
			CUT	SALVAGED/UNUSABLE PAVEMENT MATERIAL	FILL	CUT	SALVAGED/UNUSABLE PAVEMENT MATERIAL	FILL	CUT	EXPANDED FILL	MASS ORDINATE
NOTE 1	NOTE 2	NOTE 3	NOTE 1	NOTE 8							
1330+49	133049.00	0.00	62.98	5.67	0.00	0	0	0	0	0	0
1331+00	133100.00	51.00	49.67	5.67	0.00	106	11	0	106	0	95
1331+01.17	133101.17	1.17	48.25	5.67	0.00	2	0	0	108	0	97
1331+25	133125.00	23.83	64.69	5.67	0.00	50	5	0	158	0	142
1331+54	133154.00	29.00	69.64	5.67	0.00	72	6	0	230	0	208
						230	0		0		

9

9




9

9

PROJECT NO: 7020-00-71 HWY: STH 173 COUNTY: WOOD CROSS SECTIONS: STH 173 SHEET E

FILE NAME: P:\905\93\00093492\CADD\SHEETSPLAN\090201-XS.DWG PLOT DATE: 9/30/2021 10:18 AM PLOT BY: CONNOR GIRTEN PLOT NAME: PLOT SCALE: 1 IN:10 FT HORZ. / 1 IN:10 FT VERT. WISDOT/CADD SHEET 49


LAYOUT NAME - 2




9

9

PROJECT NO: 7020-00-71	HWY: STH 173	COUNTY: WOOD	CROSS SECTIONS: STH 173	SHEET	E
------------------------	--------------	--------------	-------------------------	-------	---

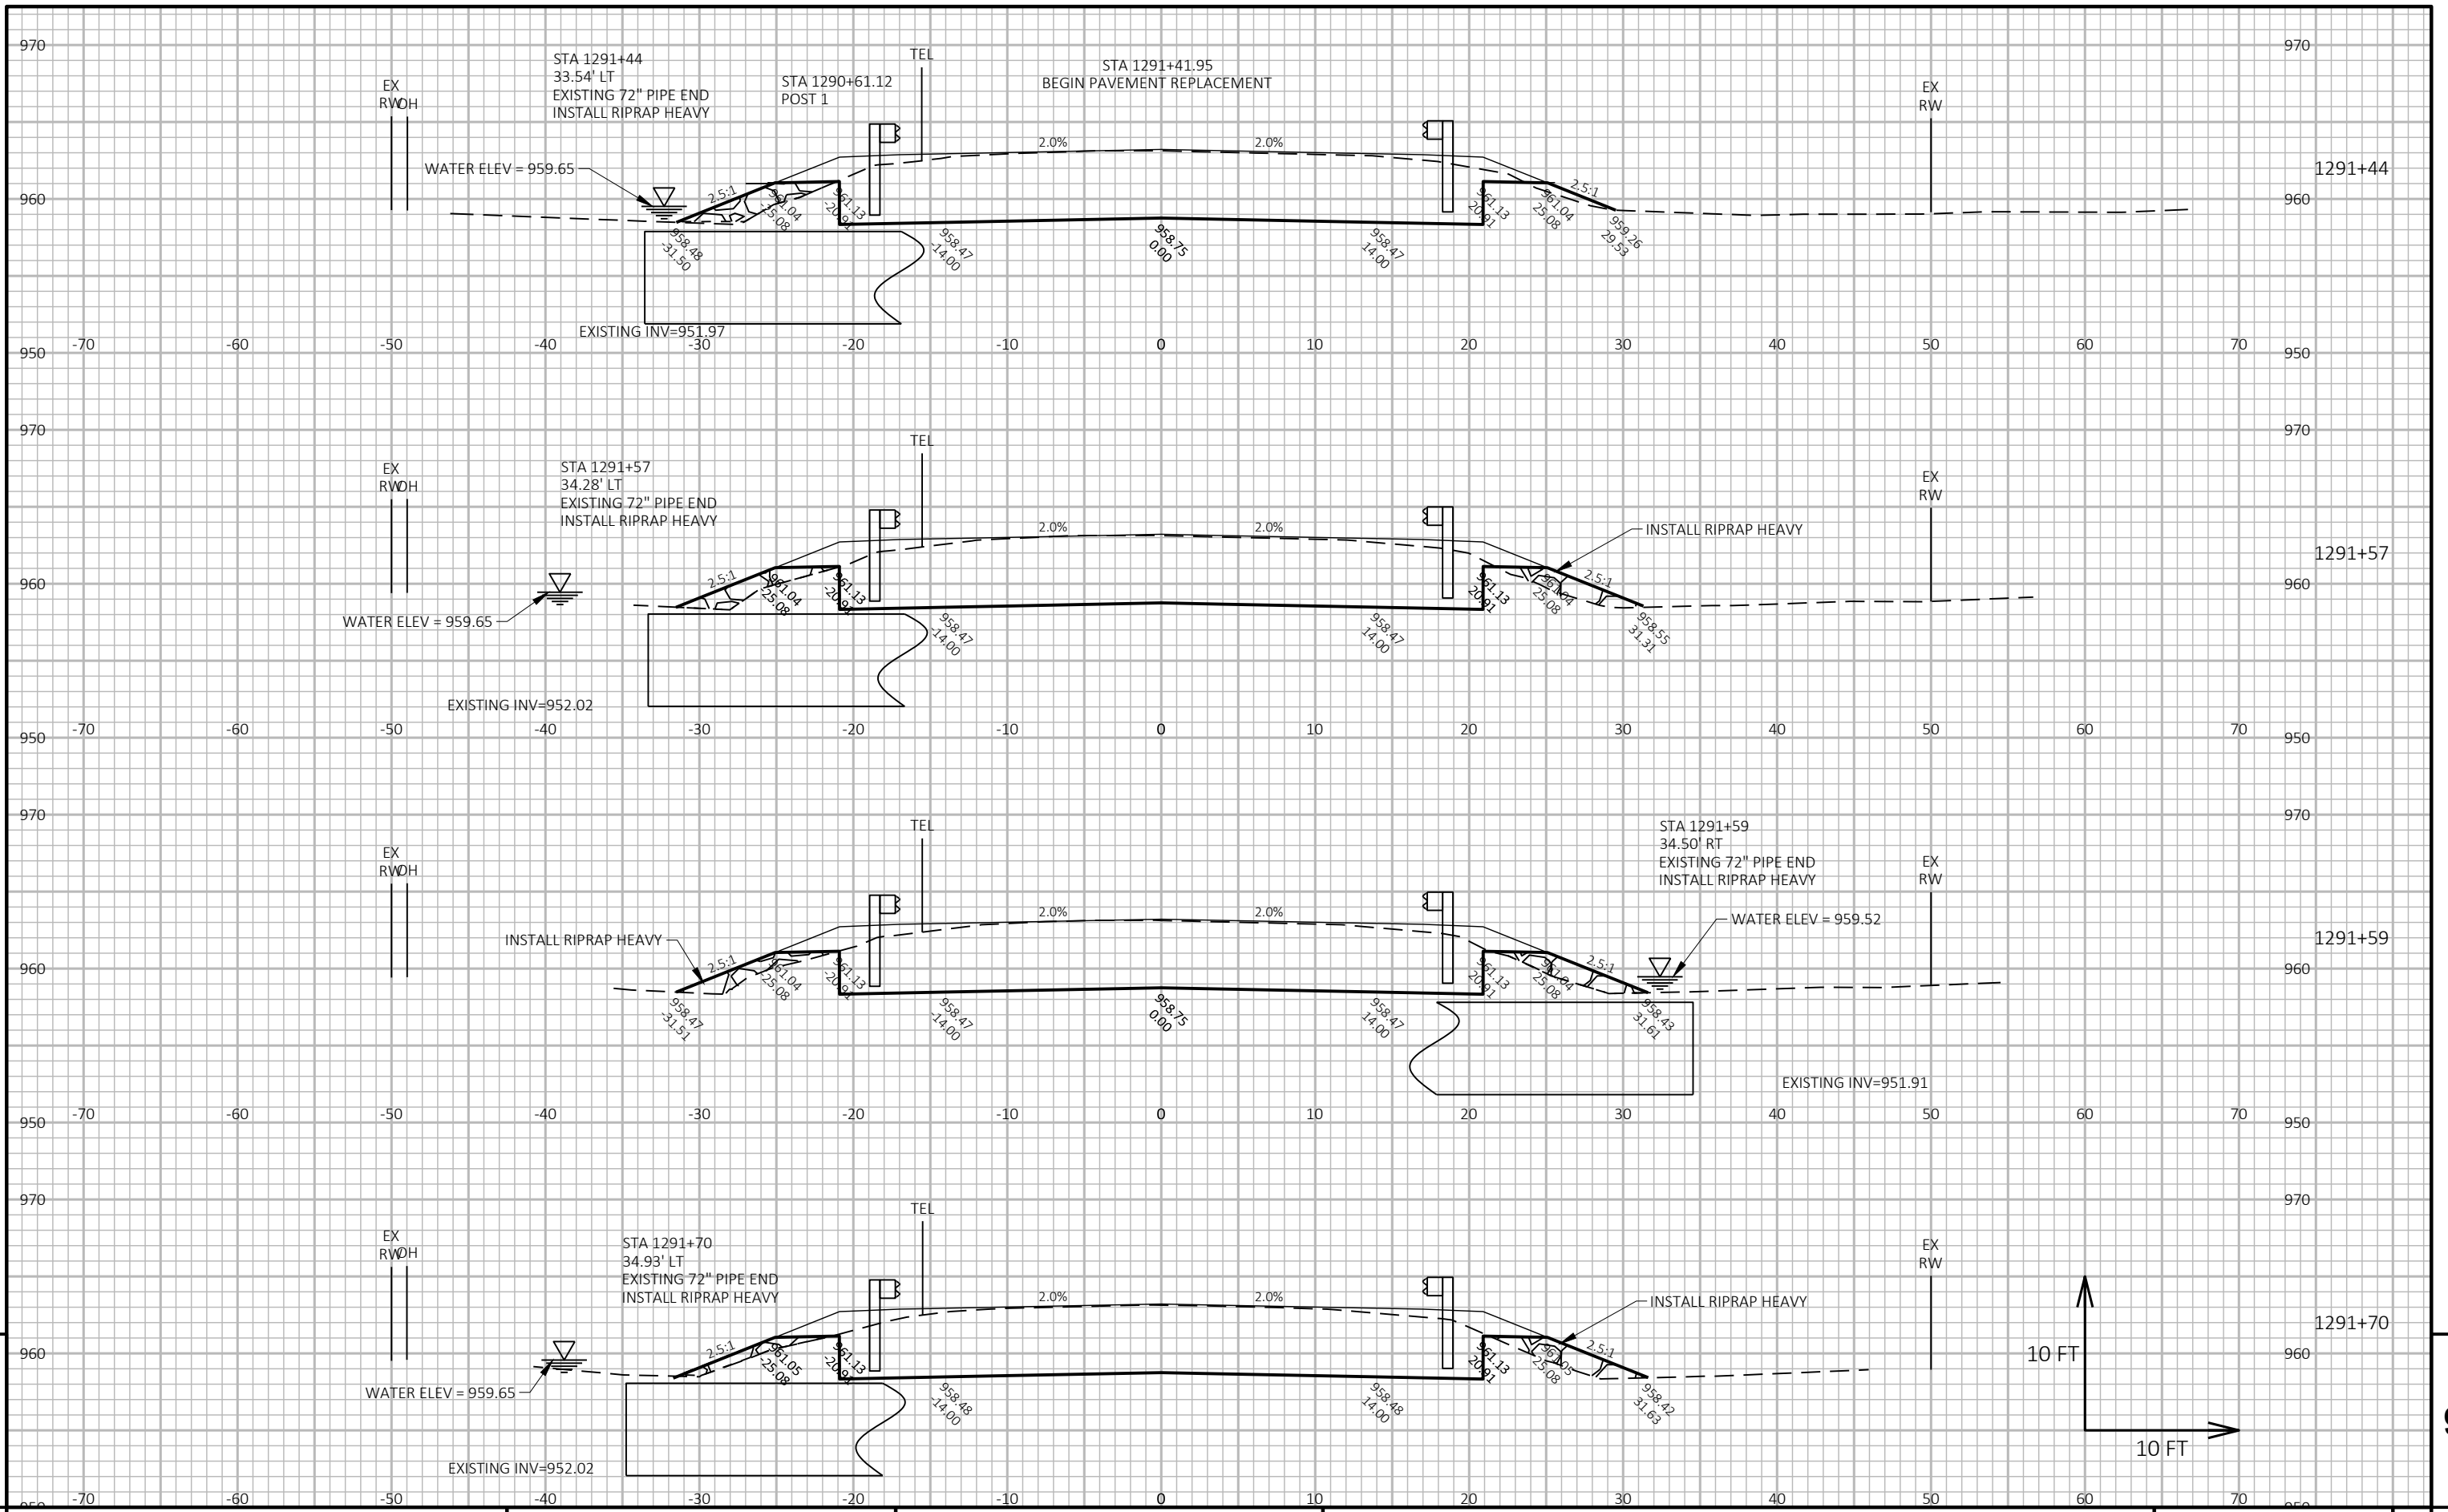

PROJECT NO: 7020-00-71 HWY: STH 173 COUNTY: WOOD CROSS SECTIONS: STH 173 SHEET 9

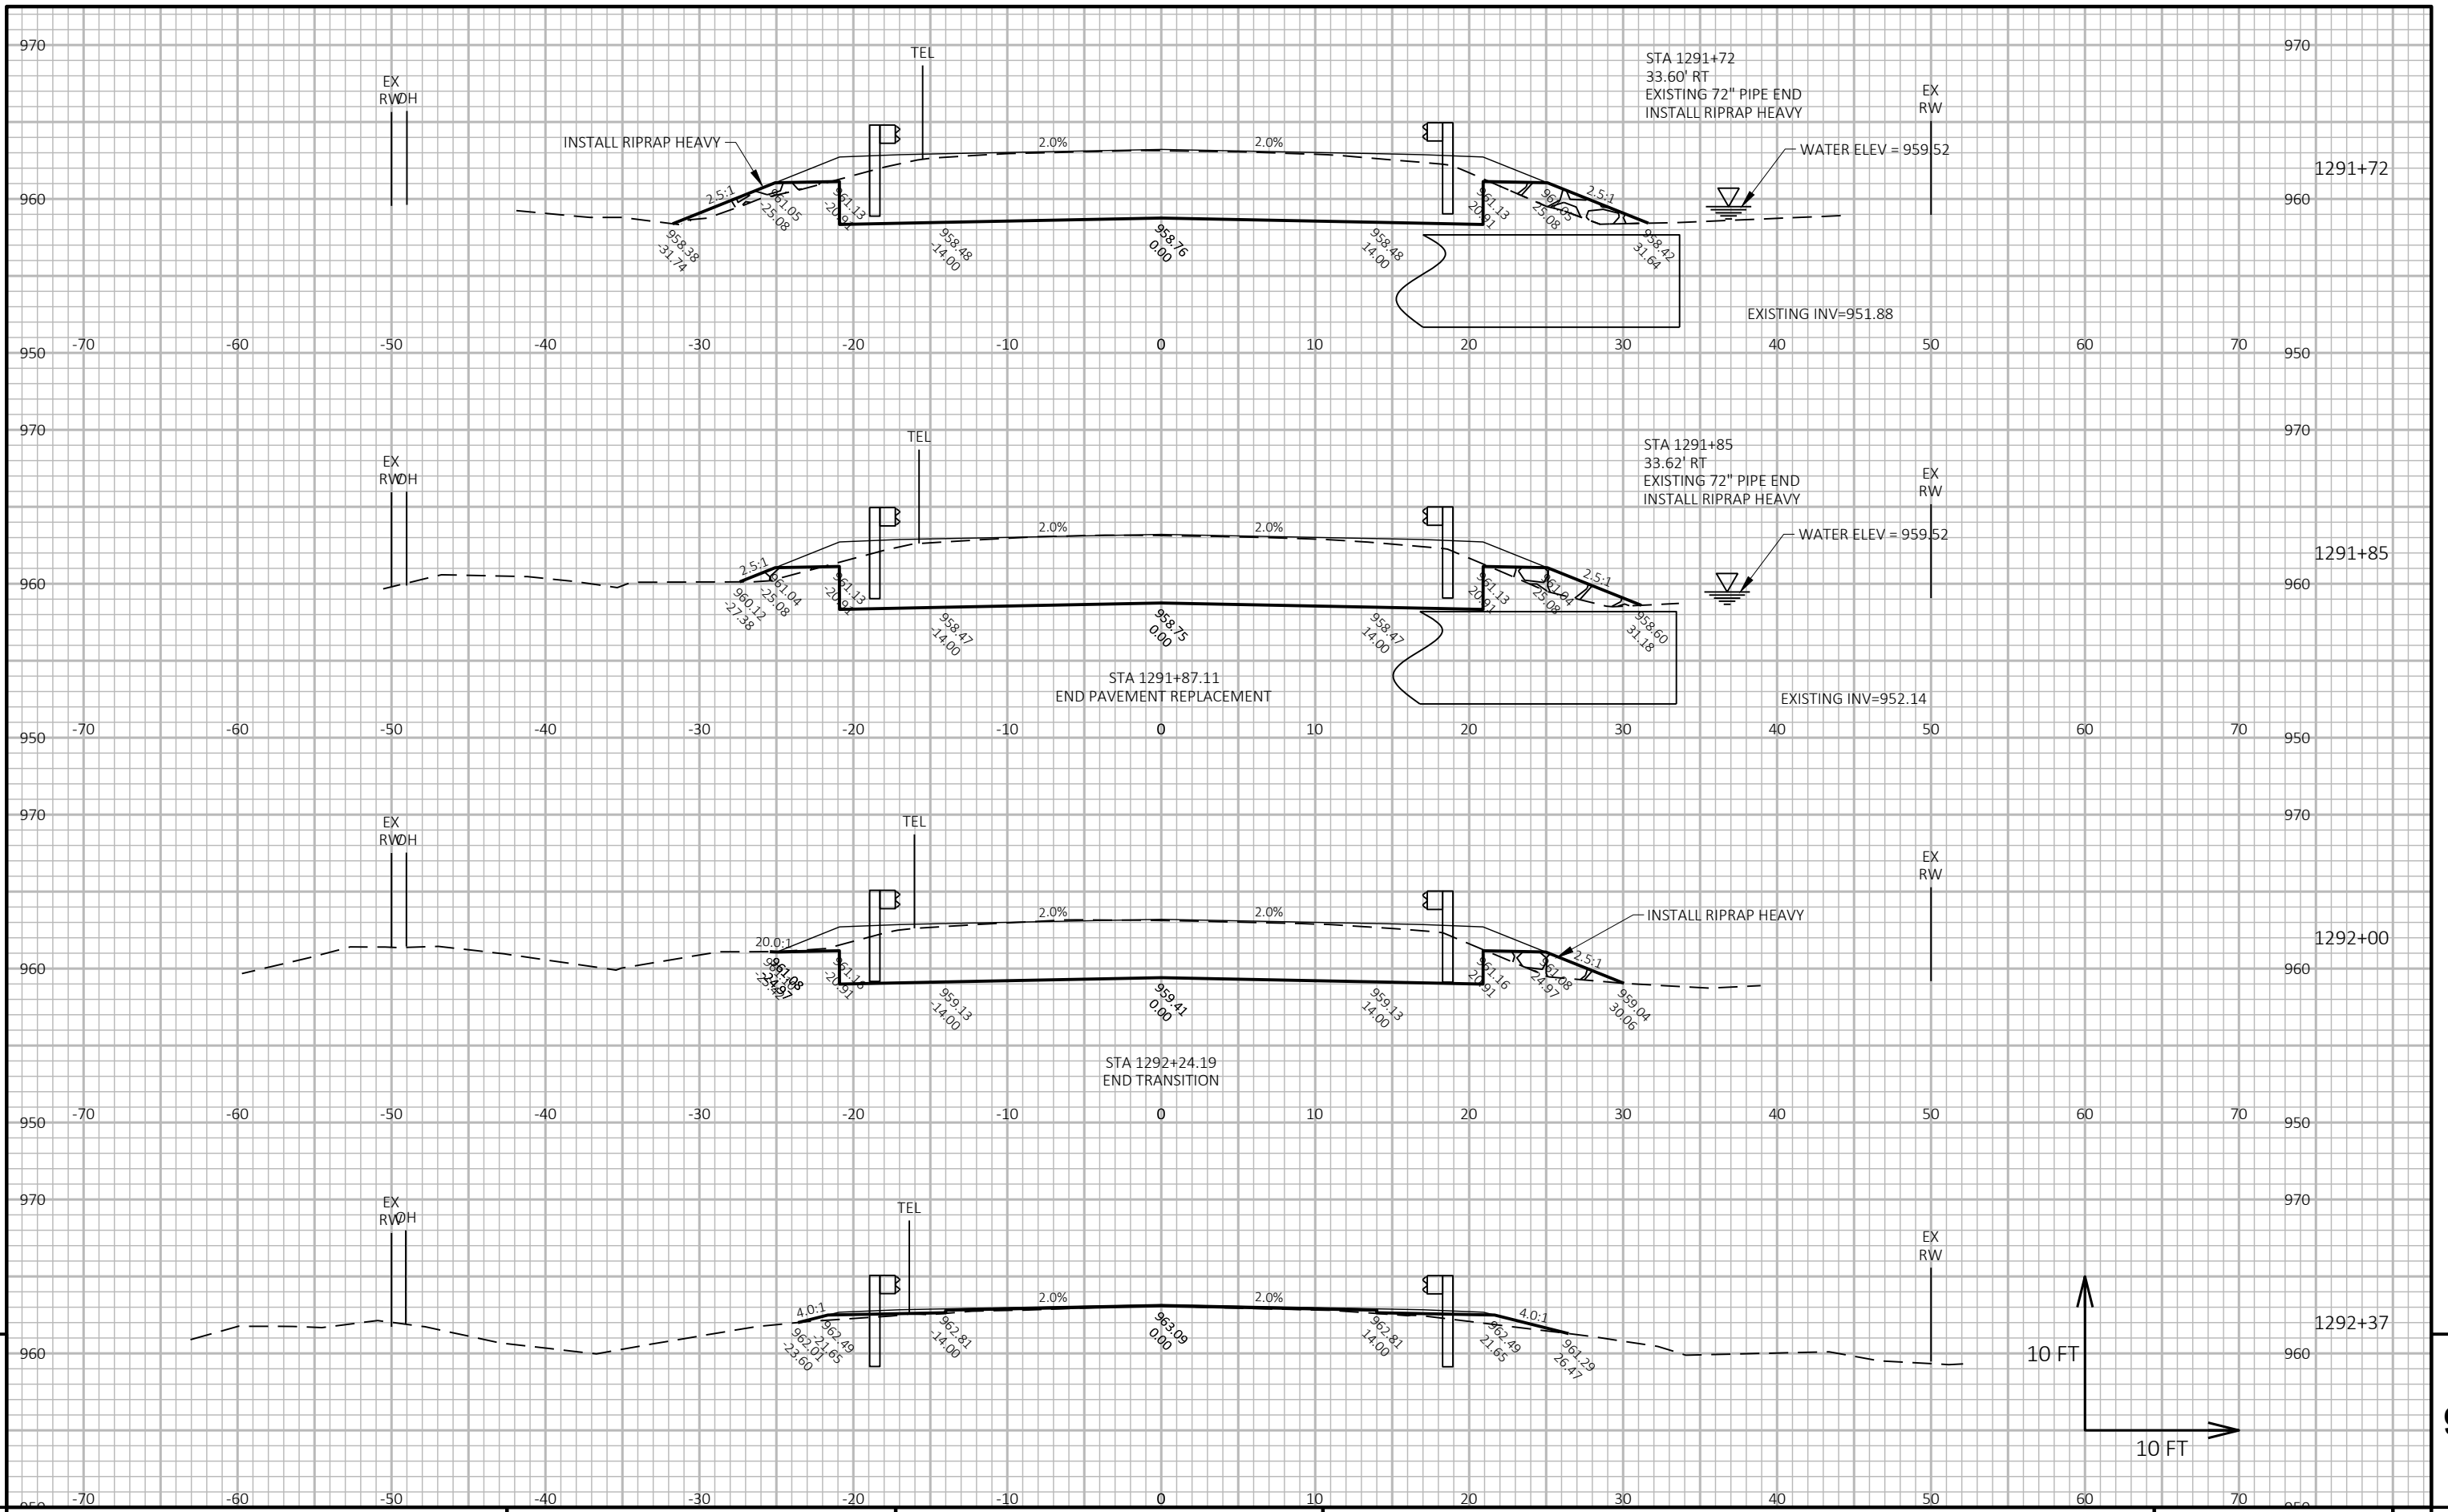


9

9

PROJECT NO: 7020-00-71 HWY: STH 173 COUNTY: WOOD CROSS SECTIONS: STH 173 SHEET E

FILE NAME: P:\905\93\00093492\CADD\SHEETSPLAN\090201-XS.DWG PLOT DATE: 9/30/2021 10:18 AM PLOT BY: CONNOR GIRTEN PLOT NAME: PLOT SCALE: 1 IN:10 FT HORZ. / 1 IN:10 FT VERT. WISDOT/CADD SHEET 49

LAYOUT NAME - 5




9

9


PROJECT NO: 7020-00-71 HWY: STH 173 COUNTY: WOOD CROSS SECTIONS: STH 173 SHEET E

FILE NAME: P:\905\93\00093492\CADD\SHEETSPLAN\090201-XS.DWG PLOT DATE: 9/30/2021 10:18 AM PLOT BY: CONNOR GIRTEN PLOT NAME: PLOT SCALE: 1 IN:10 FT HORZ. / 1 IN:10 FT VERT. WISDOT/CADD SHEET 49

LAYOUT NAME - 6




PROJECT NO: 7020-00-71 HWY: STH 173 COUNTY: WOOD CROSS SECTIONS: STH 173 SHEET 9



9

9



PROJECT NO: 7020-00-71	HWY: STH 173	COUNTY: WOOD	CROSS SECTIONS: STH 173	SHEET	E
------------------------	--------------	--------------	-------------------------	-------	---



Wisconsin Department of Transportation

Dedicated people creating transportation solutions through innovation and exceptional service.

<http://www.dot.wisconsin.gov>