



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

May 5, 2022

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #21: 1100-50-71, WISC 2022396
Milwaukee – Fond du Lac
SCL – USH 151
IH 41
Fond du Lac County

Letting of May 10, 2022

This is Addendum No. 03, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
6	Traffic

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
625.0500	Salvaged Topsoil	SY	11,333	23,980	35,313
628.1504	Silt Fence	LF	4,678	-936	3,742
628.1520	Silt Fence Maintenance	LF	4,678	-936	3,742
628.2004	Erosion Mat Class I Type B	SY	207,293	-171,980	35,313
628.7005	Inlet Protection Type A	EACH	73	-15	58
628.7504	Temporary Ditch Checks	LF	2,200	-440	1,760
628.7555	Culvert Pipe Checks	EACH	165	-33	132
629.0210	Fertilizer Type B	CWT	131	-109	22
630.0130	Seeding Mixture No. 30	LB	3,743	-3,107	636
630.0500	Seed Water	MGAL	1,161	-232	929
649.0105	Temporary Marking Line Paint 4-Inch	LF	316,472	-142,480	173,992

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
45	Miscellaneous quantities revisions
47	Miscellaneous quantities revised to revise item 649.0105

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 03

1100-50-71

May 5, 2022

Special Provisions

6. Traffic.

*Replace entire section titled **Milled Surfaces Open to Traffic** with the following:*

Opening to Traffic

Traffic will not be allowed on any milled surface. Pave milled surfaces prior to opening to traffic.

Schedule of Items

Attached, dated May 5, 2022, are the revised Schedule of Items Pages 1 - 6.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 45, 47

END OF ADDENDUM

TEMPORARY EROSION CONTROL

STATION	TO	STATION	LOCATION	SILT FENCE LF	SILT FENCE MAINTENANCE LF	PROTECTION TYPE	INLET EACH	TEMPORARY DITCH CHECKS LF	CULVERT PIPE CHECKS EACH
1804+30	-	1816+12	MEDIAN	---	---	2	2	70	12
1816+41	-	1830+33	MEDIAN	---	---	2	2	80	24
1832+01	-	1861+81	MEDIAN	---	---	6	6	160	---
1862+05	-	1907+87	MEDIAN	2,517	2,517	8	8	220	36
1911+79	-	1963+49	MEDIAN	614	614	9	9	270	---
1963+78	-	2015+65	MEDIAN	---	---	7	7	270	---
2017+71	-	2063+72	MEDIAN	408	408	8	8	240	36
2064+03	-	2095+34	MEDIAN	58	58	7	7	170	12
2097+48	-	2150+80	MEDIAN	---	---	9	9	280	12
41 SB TO CTH B RAMP				145	145	---	---	---	---
TOTAL 0010				3,742	3,742	58	58	1,760	132


Addendum No. 03
ID 1100-50-71
Revised Sheet 45
May 5, 2022

PERMANENT EROSION CONTROL

STATION	TO	STATION	LOCATION	SALVAGED TOPSOIL SY	EROSION CONTROL EACH	EROSION MAT CLASS / TYPE B SY	FERTILIZER TYPE B CWT	SEEDING MIXTURE NO. 30 LB	SEED WATER MGAL
625.0500		628.1910	MEDIAN	---	---	---	---	---	---
628.1905		629.0210	MEDIAN	---	---	---	---	---	---
628.2004		630.0130	MEDIAN	---	---	---	---	---	---
630.0500		630.0500	MEDIAN	---	---	---	---	---	---
1804+30	-	2160+50	IH 41	35,313	6	35,313	22	636	929
TOTAL 0010				35,313	6	35,313	22	636	929

PAVEMENT MARKING

STATION	TO	STATION	LOCATION	MARKING LINE EPOXY 4-INCH LF	MARKING LINE EPOXY 8-INCH LF	MARKING ARROW EPOXY EACH	MARKING STOP LINE EPOXY 18-INCH LF	COLD WEATHER MARKING EPOXY 4-INCH LF	COLD WEATHER MARKING EPOXY 4-INCH LF	TEMPORARY MARKING LINE PAINT 4-INCH LF	REMARKS
1804+30	-	2160+50	IH 41 MAINLINE	138,266	---	---	---	---	---	142,480	EDGELINES
1804+30	-	2160+50	IH 41 MAINLINE	---	---	---	---	---	---	11,400	CENTERLINE SKIPS
075P+00	-	3075S+81	B - 41S RAMP	3,012	2,064	---	---	2,064	---	5,828	CTH B - IH 41 SB ON RAMP
07NB+00	-	247NB+45	41N - B RAMP	4,376	773	2	42	773	42	4,777	IH 41 NB - CTH B OFF RAMP
075B+00	-	1875B+29	41S - B RAMP	3,094	775	2	39	775	39	3,554	IH 41 SB - CTH B OFF RAMP
07NB+00	-	317NB+75	B - 41N RAMP	4,630	2,273	---	---	2,273	---	5,953	CTH B - IH 41 NB ON RAMP
TOTAL 0010				153,378	5,885	4	81	5,885	15,112	173,992	

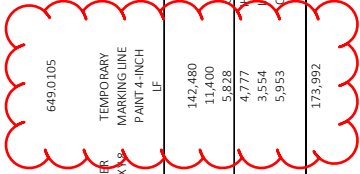

AERIAL ENFORCEMENT BARS

STATION	LOCATION	ENFORCEMENT BAR EPOXY EACH
1628+68	NB	2
1935+31	NB	2
1941+89	NB	2
1948+48	NB	2
1955+09	NB	2
1961+68	NB	2
2007+21	NB & SB	4
2013+82	NB & SB	4
2045+14	SB	2
2051+74	SB	2
2058+33	SB	2
2064+93	SB	2
2071+51	SB	2
TOTAL 0010		30

Addendum No. 03
 ID 1100-50-71
 Revised Sheet 47
 May 5, 2022



Proposal Schedule of Items

Proposal ID: 20220510021 Project(s): 1100-50-71

Federal ID(s): WISC 2022396

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0115 Removing Asphaltic Surface Butt Joints	74.000 SY	_____.	_____.
0004	204.0120 Removing Asphaltic Surface Milling	374,491.000 SY	_____.	_____.
0006	204.0165 Removing Guardrail	5,858.000 LF	_____.	_____.
0008	204.0185 Removing Masonry	3.000 CY	_____.	_____.
0010	204.9090.S Removing (item description) 01. Removing Cable Barrier	34,071.000 LF	_____.	_____.
0012	205.0100 Excavation Common	570.000 CY	_____.	_____.
0014	208.0100 Borrow	5,479.000 CY	_____.	_____.
0016	213.0100 Finishing Roadway (project) 01. 1100-50-71	1.000 EACH	_____.	_____.
0018	305.0110 Base Aggregate Dense 3/4-Inch	6,544.000 TON	_____.	_____.
0020	305.0120 Base Aggregate Dense 1 1/4-Inch	176.000 TON	_____.	_____.
0022	450.4000 HMA Cold Weather Paving	9,356.000 TON	_____.	_____.
0024	455.0605 Tack Coat	26,214.000 GAL	_____.	_____.
0026	460.0115.S HMA Pavement Test Strips Volumetrics	1.000 EACH	_____.	_____.
0028	460.0120.S HMA Pavement Test Strips Density	1.000 EACH	_____.	_____.
0030	460.2000 Incentive Density HMA Pavement	23,960.000 DOL	1.00000	23,960.00
0032	460.5224 HMA Pavement 4 LT 58-28 S	9,656.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20220510021 Project(s): 1100-50-71

Federal ID(s): WISC 2022396

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	460.6424 HMA Pavement 4 MT 58-28 H	3,604.000 TON	_____	_____
0036	460.8624 HMA Pavement 4 SMA 58-28 V	24,164.000 TON	_____	_____
0038	460.9000.S Material Transfer Vehicle (project) 01. 1100-50-71	1.000 EACH	_____	_____
0040	465.0400 Asphaltic Shoulder Rumble Strips	142,560.000 LF	_____	_____
0042	504.0900 Concrete Masonry Endwalls	3.000 CY	_____	_____
0044	522.0118 Culvert Pipe Reinforced Concrete Class III 18-Inch	4.000 LF	_____	_____
0046	524.0118 Culvert Pipe Salvaged 18-Inch	20.000 LF	_____	_____
0048	524.0124 Culvert Pipe Salvaged 24-Inch	80.000 LF	_____	_____
0050	524.0148 Culvert Pipe Salvaged 48-Inch	60.000 LF	_____	_____
0052	524.0618 Apron Endwalls for Culvert Pipe Salvaged 18-Inch	2.000 EACH	_____	_____
0054	524.0624 Apron Endwalls for Culvert Pipe Salvaged 24-Inch	4.000 EACH	_____	_____
0056	613.1100.S Cable Barrier Type 1	33,471.000 LF	_____	_____
0058	613.1200.S Cable Barrier End Terminal Type 1	20.000 EACH	_____	_____
0060	614.0220 Steel Thrie Beam Bullnose Terminal	6.000 EACH	_____	_____
0062	614.0230 Steel Thrie Beam	474.000 LF	_____	_____
0064	614.2300 MGS Guardrail 3	5,127.000 LF	_____	_____



Proposal Schedule of Items

Proposal ID: 20220510021 Project(s): 1100-50-71

Federal ID(s): WISC 2022396

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0066	614.2500 MGS Thrie Beam Transition	169.000 LF	_____.	_____.
0068	614.2610 MGS Guardrail Terminal EAT	6.000 EACH	_____.	_____.
0070	614.2620 MGS Guardrail Terminal Type 2	6.000 EACH	_____.	_____.
0072	618.0100 Maintenance And Repair of Haul Roads (project) 01. 1100-50-71	1.000 EACH	_____.	_____.
0074	619.1000 Mobilization	1.000 EACH	_____.	_____.
0076	624.0100 Water	72.000 MGAL	_____.	_____.
0078	625.0500 Salvaged Topsoil	35,313.000 SY	_____.	_____.
0080	628.1504 Silt Fence	3,742.000 LF	_____.	_____.
0082	628.1520 Silt Fence Maintenance	3,742.000 LF	_____.	_____.
0084	628.1905 Mobilizations Erosion Control	14.000 EACH	_____.	_____.
0086	628.1910 Mobilizations Emergency Erosion Control	6.000 EACH	_____.	_____.
0088	628.2004 Erosion Mat Class I Type B	35,313.000 SY	_____.	_____.
0090	628.7005 Inlet Protection Type A	58.000 EACH	_____.	_____.
0092	628.7504 Temporary Ditch Checks	1,760.000 LF	_____.	_____.
0094	628.7555 Culvert Pipe Checks	132.000 EACH	_____.	_____.
0096	629.0210 Fertilizer Type B	22.000 CWT	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20220510021 Project(s): 1100-50-71

Federal ID(s): WISC 2022396

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0098	630.0130 Seeding Mixture No. 30	636.000 LB	_____.	_____.
0100	630.0500 Seed Water	929.000 MGAL	_____.	_____.
0102	633.5200 Markers Culvert End	7.000 EACH	_____.	_____.
0104	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0106	643.0300 Traffic Control Drums	147,104.000 DAY	_____.	_____.
0108	643.0420 Traffic Control Barricades Type III	1,920.000 DAY	_____.	_____.
0110	643.0705 Traffic Control Warning Lights Type A	3,840.000 DAY	_____.	_____.
0112	643.0715 Traffic Control Warning Lights Type C	2,400.000 DAY	_____.	_____.
0114	643.0800 Traffic Control Arrow Boards	512.000 DAY	_____.	_____.
0116	643.0900 Traffic Control Signs	10,416.000 DAY	_____.	_____.
0118	643.0920 Traffic Control Covering Signs Type II	192.000 EACH	_____.	_____.
0120	643.1050 Traffic Control Signs PCMS	42.000 DAY	_____.	_____.
0122	643.1205.S Basic Traffic Queue Warning System	256.000 DAY	_____.	_____.
0124	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0126	646.1020 Marking Line Epoxy 4-Inch	153,378.000 LF	_____.	_____.
0128	646.1555 Marking Line Grooved Contrast Permanent Tape 4-Inch	17,810.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20220510021 Project(s): 1100-50-71

Federal ID(s): WISC 2022396

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0130	646.3020 Marking Line Epoxy 8-Inch	5,885.000 LF	_____	_____
0132	646.5020 Marking Arrow Epoxy	4.000 EACH	_____	_____
0134	646.5420 Marking Aerial Enforcement Bar Epoxy	30.000 EACH	_____	_____
0136	646.6120 Marking Stop Line Epoxy 18-Inch	81.000 LF	_____	_____
0138	646.6464 Cold Weather Marking Epoxy 4-Inch	15,112.000 LF	_____	_____
0140	646.6468 Cold Weather Marking Epoxy 8-Inch	5,885.000 LF	_____	_____
0144	650.6000 Construction Staking Pipe Culverts	7.000 EACH	_____	_____
0146	650.8000 Construction Staking Resurfacing Reference	35,620.000 LF	_____	_____
0148	650.9910 Construction Staking Supplemental Control (project) 01. 1100-50-71	LS	LUMP SUM	_____
0150	650.9920 Construction Staking Slope Stakes	4,142.000 LF	_____	_____
0152	690.0150 Sawing Asphalt	170.000 LF	_____	_____
0154	740.0440 Incentive IRI Ride	108,000.000 DOL	1.00000	108,000.00
0156	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,100.000 HRS	5.00000	10,500.00
0158	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	3,360.000 HRS	5.00000	16,800.00
0160	649.0105 Temporary Marking Line Paint 4-Inch	173,992.000 LF	_____	_____
Section: 0001			Total:	_____

Total Bid: _____.

