



Wisconsin Department of Transportation

January 3, 2023

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

**Proposal #07: 5572-00-72, WISC 2023141
STH 78-USH 14
Black Earth Creek, B-13-0883
CTH KP
Dane County**

Letting of January 10, 2023

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
6	Utilities

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
643.0410	Traffic Control Barricades Type II	Day	213	+24	237
643.0420	Traffic Control Barricades Type III	Day	1,207	+136	1,343
643.0705	Traffic Control Warning Lights Type A	Day	1,775	+200	1,975
643.0900	Traffic Control Signs	Day	8,733	+984	9,717

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
21	Miscellaneous Quantities (revisions to traffic control bid item quantities due to changes to the contract time)

Other

Revised the contract time for completion from 40 working days to 45 working days (an increase of 5 working days).

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

5572-00-72

January 3, 2023

Special Provisions

6. Utilities

*Add the following paragraph under section titled **Charter Communications (communications)**:*

Charter can temporarily lower their overhead fiber facility that is located near B-13-883, upon request. Contact Charter prior to construction to determine which work operations require the overhead fiber line to be temporarily lowered. Contact Charter a minimum of two weeks prior to work operations potentially impacting the overhead fiber line to coordinate the temporary lowering of the overhead fiber line.

*Add the following paragraph under section titled **Madison Gas & Electric (electric)**:*

MG&E can temporarily relocate their overhead electric line that is located near B-13-883, upon request. Availability and timing of the relocation need to be coordinated with MG&E. Contact MG&E prior to construction to determine which work operations require the overhead line be temporarily relocated. Contact MG&E a minimum of two weeks prior to work operations potentially impacting the overhead line to schedule the temporary relocation of the electric line.

Schedule of Items

Attached, dated January 3, 2023, are the revised Schedule of Items Page 5.


Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 21.

END OF ADDENDUM

SIGNING SUMMARY

SIGN APPROX. NO.	STA.	LOC.	CODE	SIGN MESSAGE	SIGN SIZE (WxH)	REFLECTIVE TYPE I	SIGN TYPE II	POSTS 4x16-INCH	MOVING SIGNS	REMOVING SIGNS	REMOVING SMALL SIGNS	SUPPORTS	REMARKS
0010	101	12406	RT	R9-3A	NO PEDESTRIAN CROSSING (SYMBOL SIGN)	1 REMOVE
	102	12438	RT	W5-3	SIGNAL AHEAD	1 REMOVE
	103	12444	RT	W5-52R	CLEARANCE STRIPPER DOWN LEFT	1 REMOVE
	104	12486	RT	W5-52L	CLEARANCE STRIPPER DOWN RIGHT	1 REMOVE
	105	13454	RT	R9-3A	NO PEDESTRIAN CROSSING (SYMBOL SIGN)	1 REMOVE 25MPH SPEED LIMIT SIGN ON BACK
	106	12486	LT	W5-52R	CLEARANCE STRIPPER DOWN LEFT	1 REMOVE
	107	12444	LT	W5-52L	CLEARANCE STRIPPER DOWN RIGHT	1 REMOVE
	108	12414	RT	W5-3	SIGNAL AHEAD	1 REMOVE
	109	12433	RT	...	PUBLIC FISHING ONLY	1 REMOVE
	110	13406	RT	W10-1	RAILROAD CROSSING	1 REMOVE
	111	11487	RT	W10-1	RAILROAD CROSSING	1 REMOVE
	112	12486	RT	W10-1	RAILROAD CROSSING	1 REMOVE
	113	14435	RT	W1-1R	RIGHT TURN	1 REMOVE
TOTALS													8

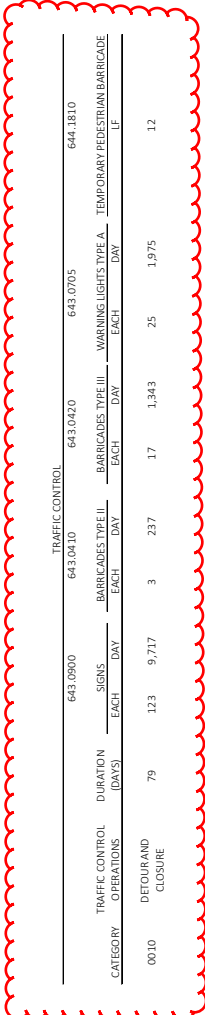

FIELD OFFICE TYPE C			TRAFFIC CONTROL		
CATEGORY	PROJECT	EACH	CATEGORY	PROJECT	EACH
0010	5572-00-72	1	0010	5572-00-72	1
		642.52/01			
		643.50/00			

INSTALLING AND MAINTAINING BIRD DETERRENT SYSTEM		
CATEGORY	STATION	EACH
0010	12465	1
		999.20/00.5
		999.20/00.5

CONSTRUCTION STAKING										
CATEGORY	STATION - STATION	LF	LF	LF	LF	LF	LF	LF	LF	LF
650.45/00	650.50/00	650.50/00	650.50/00	650.50/00	650.50/00	650.50/00	650.50/00	650.50/00	650.50/00	650.50/00
0010	11487 - 12442	40	40	40	40	40	40	40	40	40
	12480 - 14417	125	110	240	15	15	15	15	15	15
TOTALS										

EXCAVATION, HAULING, AND DISPOSAL OF CREOSOTE CONTAMINATED SOIL										
CATEGORY	STATION - STATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION
0010	12455 - 12446	110	110	110	110	110	110	110	110	110
	12485 - 12496	110	110	110	110	110	110	110	110	110
TOTAL										

SAWING										
CATEGORY	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION	LOCATION
0010	11487 - 12442	34	19	19	19	19	19	19	19	19
	12490 - 14417	85	11	11	11	11	11	11	11	11
TOTALS										

MARKING LINE ITEMS										
CATEGORY	STATION - STATION	LF	LF	LF	LF	LF	LF	LF	LF	LF
0010	11487 - 14417	56	460	460	460	460	460	460	460	460
TOTAL										

TRAFFIC CONTROL COVERING SIGNS TYPE II										
CATEGORY	NO. OF CYCLES	NO. OF SIGNS	NO. OF SIGNS	NO. OF SIGNS	NO. OF SIGNS	NO. OF SIGNS	NO. OF SIGNS	NO. OF SIGNS	NO. OF SIGNS	NO. OF SIGNS
0010	1	9	9	9	9	9	9	9	9	9
TOTAL										



Proposal Schedule of Items

Proposal ID: 20230110007 Project(s): 5572-00-72

Federal ID(s): WISC 2023141

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0130	638.3000 Removing Small Sign Supports	8.000 EACH	_____.	_____.
0132	642.5201 Field Office Type C	1.000 EACH	_____.	_____.
0134	643.0410 Traffic Control Barricades Type II	237.000 DAY	_____.	_____.
0136	643.0420 Traffic Control Barricades Type III	1,343.000 DAY	_____.	_____.
0138	643.0705 Traffic Control Warning Lights Type A	1,975.000 DAY	_____.	_____.
0140	643.0900 Traffic Control Signs	9,717.000 DAY	_____.	_____.
0142	643.0920 Traffic Control Covering Signs Type II	9.000 EACH	_____.	_____.
0144	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0146	644.1810 Temporary Pedestrian Barricade	12.000 LF	_____.	_____.
0148	645.0111 Geotextile Type DF Schedule A	82.000 SY	_____.	_____.
0150	645.0120 Geotextile Type HR	360.000 SY	_____.	_____.
0152	646.1005 Marking Line Paint 4-Inch	516.000 LF	_____.	_____.
0154	650.4500 Construction Staking Subgrade	180.000 LF	_____.	_____.
0156	650.5000 Construction Staking Base	150.000 LF	_____.	_____.
0158	650.5500 Construction Staking Curb Gutter and Curb & Gutter	280.000 LF	_____.	_____.
0160	650.6000 Construction Staking Pipe Culverts	1.000 EACH	_____.	_____.

