



# Wisconsin Department of Transportation

February 1, 2023

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #31: 4685-29-60, WISC 2023242**  
**Appleton, STH 441**  
**USH 10 – North Junction IH 41**  
**STH 441**  
**Calumet and Outagamie Counties**

### Letting of February 14, 2023

This is Addendum No. 02, which provides for the following:

#### Special Provisions:

| Revised Special Provisions |   |
|----------------------------|---|
| Article No.                | Description                                 |
| 3                          | Prosecution and Progress                    |
| 5                          | Traffic                                     |
| 6                          | Holiday and Special Event Work Restrictions |
| 7                          | Utilities                                   |

| Deleted Special Provisions |                                 |
|----------------------------|---------------------------------|
| Article No.                | Description                     |
| 24                         | Rout and Seal, Item 415.6000.S. |

#### Schedule of Items:

| Deleted Bid Item Quantities |                  |      |                                  |                              |                               |
|-----------------------------|------------------|------|----------------------------------|------------------------------|-------------------------------|
| Bid Item                    | Item Description | Unit | Proposal Total Prior to Addendum | Proposal Quantity Change (-) | Proposal Total After Addendum |
| 415.6000.S                  | Rout and Seal    | LF   | 705                              | -705                         | 0                             |

**Plan Sheets:**

| <b>Revised Plan Sheets</b> |   |
|----------------------------|---|
| <b>Plan Sheet</b>          | <b>Plan Sheet Title (brief description of changes to sheet)</b> |
| 146                        | Miscellaneous Quantities (removed Rout and Seal bid item)       |

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

**ADDENDUM NO. 02**

**4685-29-60**

**February 1, 2023**

**Special Provisions**

**3. Prosecution and Progress.**

*Replace subsection titled Stages 1 and 2: Fox River Bridge Segment Long-Term Single Lane Closure - (Station 498+00 NB to Station 583+00 NB) under section titled **Interim Completion of Work and Liquidated Damages** with the following:*

Stages 1 and 2: Fox River Bridge Segment Long-Term Single Lane Closure - (Station 498+00 NB to Station 570+00 NB)

Complete Expansion Device Modular work on Structure B-44-126, and all culvert, storm sewer, concrete barrier wall single face, MGS guardrail, and concrete pavement work within the limits of concrete barrier temporary precast shown in the plans between Station 498+00 NB and Station 570+00 NB within 90 consecutive calendar days.

If the contractor fails to open all traffic lanes and remove all traffic control devices associated with the long-term single lane closure within 90 consecutive calendar days, the department will assess \$13,750 in interim liquidated damages for each calendar day the contract work remains incomplete beyond 90 consecutive calendar days. An entire calendar day will be charged for any period of time within a calendar day that the work remains incomplete beyond 12:01 AM.

Long-term single lane closures will not be allowed prior to 6:00 AM Tuesday, May 30, 2023.

*Add the following at the end of section titled **Interim Completion of Work and Liquidated Damages**:*

Full Ramp Closures

Close ramps as allowed in the traffic article for up to 10 full closures in total for each ramp. The full closures do not have to be consecutive.

If the contractor exceeds 10 total full closures on a single ramp, the department will assess \$750 in interim liquidated damages for each additional full ramp closure beyond 10 total full closures on a single ramp. An entire full closure will be charged for any period of time within the allowable full ramp closure times that a ramp is closed.

**5. Traffic.**

*Add the following at the end of section titled **Allowable Lane/Ramp/Shoulder Closure Times**:*

STH 441 off-peak single lane closures will not be allowed in areas where a long-term single lane closure is present. If off-peak single lane closures are in place upstream or downstream of a long-term single lane closure, provide a minimum two mile gap between the closures. If a minimum two mile gap cannot be provided, the lane closure must be continuous with no gap.

*Replace entire section titled **STH 441 Long-Term Single Lane Closures** with the following:*

**STH 441 Long-Term Single Lane Closures**

**Stage 1**

**Traffic:**

- Close the inside, median travel lane as shown in the plans.

**Construction:**

Complete Expansion Device Modular work on Structure B-44-126, and all culvert, storm sewer, concrete barrier wall single face, MGS guardrail, and concrete pavement work, within the limits of concrete barrier temporary precast shown in the plans between Station 498+00 NB and Station 570+00 NB.

**Stage 2**

**Traffic:**

- Close the outside travel lane as shown in the plans.

**Construction:**

- Complete Expansion Device Modular work on Structure B-44-126, and all culvert, storm sewer, concrete barrier wall single face, MGS guardrail, and concrete pavement work, within the limits of concrete barrier temporary precast shown in the plans between Station 498+00 NB and Station 570+00 NB.

**6. Holiday and Special event Work Restrictions.**

*Add the following paragraph at the end of the article:*

Do not perform work on, nor haul materials of any kind along or across any portion of the highway carrying Tellulah Avenue and Newberry Street traffic, and entirely clear the traveled way, shoulders, and sidewalk of such portions of the highway of equipment, barricades, signs, lights, and any other material that might impede the free flow of traffic during the Fox Cities Marathon, from 12:01 AM Friday, September 15, 2023 to 11:59 PM Sunday, September 17, 2023.

**7. Utilities.**

*Add the following to the end of the article:*

The following owners will be installing new facilities during construction:

**We Energies (ELCTY)** will be installing a new, underground electric along the northern right of way of CTH OO from Conkey Street to French Road. The new underground electric will cross STH 441 (including the CTH OO southbound exit ramp and the CTH OO northbound entrance ramp) at about Station 586+00 NB. This work is unrelated to the STH 441 project.

**24. Deleted**

**Schedule of Items**

Attached, dated February 1, 2023, are the revised Schedule of Items Pages 1 – 16.

**Plan Sheets**


The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:  
Revised: 146.

END OF ADDENDUM

CONCRETE PAVEMENT REPAIR/REPLACEMENT SUMMARY

Table with columns: CATEGORY, STATION, LOCATION, 690.0250 SAWING CONCRETE, 416.0610 DRILLED THE BARS, 416.0620 CONCRETE PAVEMENT REPAIR, 416.1710 CONCRETE PAVEMENT REPAIR, 416.1715 CONCRETE PAVEMENT REPAIR, 416.1720 CONCRETE PAVEMENT REPAIR, 416.1725 CONCRETE PAVEMENT REPAIR. Includes subtotals for ROUT AND SEAL, CONTINUOUS DIAMOND GRINDING CONCRETE PAVEMENT, and HMA PAVEMENT.

\* ADDITIONAL QUANTITIES LISTED ELSEWHERE  
\*\* USE SHEES ONLY IN AREAS NOT PROTECTED BY CONCRETE BARRIER TEMPORARY PRECAST

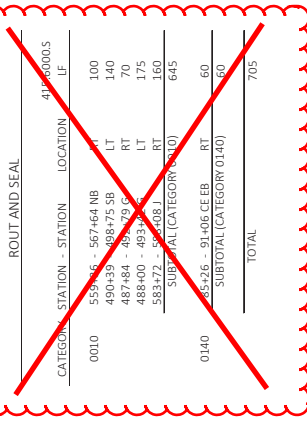

ROUT AND SEAL

Table with columns: CATEGORY, STATION, LOCATION, 416.0005, 420.1000, 460.5224. Includes subtotals for ROUT AND SEAL, CONCRETE CURB & GUTTER, and MISCELLANEOUS QUANTITIES.

CONCRETE PAVEMENT

Table with columns: CATEGORY, STATION, LOCATION, 416.0610 DRILLED THE BARS, 204.0100 REMOVING CONCRETE CURB & GUTTER, 415.0090 CONCRETE PAVEMENT 9 INCH, 415.0100 CONCRETE PAVEMENT JOINING. Includes subtotals for BASE AS AGGREGATE DENSE and MISCELLANEOUS QUANTITIES.

\* ADDITIONAL QUANTITIES LISTED ELSEWHERE.

BASE AS AGGREGATE DENSE

Table with columns: CATEGORY, STATION, LOCATION, 305.0110, 305.0120, 624.0100 WATER. Includes subtotals for BASE AS AGGREGATE DENSE and MISCELLANEOUS QUANTITIES.

\* ADDITIONAL QUANTITIES LISTED ELSEWHERE



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description   | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0002                 | 201.0110<br>Clearing  | 39.000<br>SY                   | _____.     | _____.     |
| 0004                 | 201.0210<br>Grubbing  | 84.000<br>SY                   | _____.     | _____.     |
| 0006                 | 203.0100<br>Removing Small Pipe Culverts                              | 4.000<br>EACH                  | _____.     | _____.     |
| 0008                 | 203.0330<br>Debris Containment (structure) 01. B-8-24                 | 1.000<br>EACH                  | _____.     | _____.     |
| 0010                 | 203.0330<br>Debris Containment (structure) 02. B-44-125               | 1.000<br>EACH                  | _____.     | _____.     |
| 0012                 | 203.0330<br>Debris Containment (structure) 03. B-8-33                 | 1.000<br>EACH                  | _____.     | _____.     |
| 0014                 | 203.0335<br>Debris Containment Over Waterway (structure) 01. B-44-126 | 1.000<br>EACH                  | _____.     | _____.     |
| 0016                 | 204.0100<br>Removing Concrete Pavement                                | 1,286.000<br>SY                | _____.     | _____.     |
| 0018                 | 204.0150<br>Removing Curb & Gutter                                    | 652.000<br>LF                  | _____.     | _____.     |
| 0020                 | 204.0157<br>Removing Concrete Barrier                                 | 900.000<br>LF                  | _____.     | _____.     |
| 0022                 | 204.0165<br>Removing Guardrail  | 9,065.000<br>LF                | _____.     | _____.     |
| 0024                 | 204.0170<br>Removing Fence  | 1,211.000<br>LF                | _____.     | _____.     |
| 0026                 | 204.0175<br>Removing Concrete Slope Paving                            | 152.000<br>SY                  | _____.     | _____.     |
| 0028                 | 204.0190<br>Removing Surface Drains                                   | 3.000<br>EACH                  | _____.     | _____.     |
| 0030                 | 204.0220<br>Removing Inlets   | 11.000<br>EACH                 | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description                                    | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0032                 | 204.0245<br>Removing Storm Sewer (size) 01. 12-Inch    | 170.000<br>LF                  | _____.     | _____.     |
| 0034                 | 204.0245<br>Removing Storm Sewer (size) 02. 18-Inch    | 798.000<br>LF                  | _____.     | _____.     |
| 0036                 | 204.0245<br>Removing Storm Sewer (size) 03. 24-Inch    | 162.000<br>LF                  | _____.     | _____.     |
| 0038                 | 204.0291.S<br>Abandoning Sewer                         | 36.000<br>CY                   | _____.     | _____.     |
| 0040                 | 205.0100<br>Excavation Common                          | 7,103.000<br>CY                | _____.     | _____.     |
| 0042                 | 213.0100<br>Finishing Roadway (project) 01. 4685-29-60 | 1.000<br>EACH                  | _____.     | _____.     |
| 0044                 | 305.0110<br>Base Aggregate Dense 3/4-Inch              | 1,746.000<br>TON               | _____.     | _____.     |
| 0046                 | 305.0120<br>Base Aggregate Dense 1 1/4-Inch            | 7,190.000<br>TON               | _____.     | _____.     |
| 0048                 | 312.0110<br>Select Crushed Material                    | 802.000<br>TON                 | _____.     | _____.     |
| 0050                 | 415.0090<br>Concrete Pavement 9-Inch                   | 1,772.000<br>SY                | _____.     | _____.     |
| 0052                 | 415.0100<br>Concrete Pavement 10-Inch                  | 2,920.000<br>SY                | _____.     | _____.     |
| 0056                 | 416.0610<br>Drilled Tie Bars                           | 3,123.000<br>EACH              | _____.     | _____.     |
| 0058                 | 416.0620<br>Drilled Dowel Bars                         | 5,512.000<br>EACH              | _____.     | _____.     |
| 0060                 | 416.1010<br>Concrete Surface Drains                    | 16.000<br>CY                   | _____.     | _____.     |
| 0062                 | 416.1110<br>Concrete Shoulder Rumble Strips            | 11,320.000<br>LF               | _____.     | _____.     |
| 0064                 | 416.1710<br>Concrete Pavement Repair                   | 55.000<br>SY                   | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description  | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0066                 | 416.1715<br>Concrete Pavement Repair SHES                                | 2,040.000<br>SY                | _____.     | _____.     |
| 0068                 | 416.1720<br>Concrete Pavement Replacement                                | 705.000<br>SY                  | _____.     | _____.     |
| 0070                 | 416.1725<br>Concrete Pavement Replacement SHES                           | 4,420.000<br>SY                | _____.     | _____.     |
| 0072                 | 416.9100.S<br>Filling Concrete Shoulder Rumble Strips (size) 01. 30-Inch | 625.000<br>EACH                | _____.     | _____.     |
| 0074                 | 416.9112.S<br>Filling Concrete Shoulder Rumble Strips 12-Inch            | 10,590.000<br>LF               | _____.     | _____.     |
| 0076                 | 420.1000<br>Continuous Diamond Grinding Concrete Pavement                | 171,100.000<br>SY              | _____.     | _____.     |
| 0078                 | 460.2000<br>Incentive Density HMA Pavement                               | 320.000<br>DOL                 | 1.00000    | 320.00     |
| 0080                 | 460.5224<br>HMA Pavement 4 LT 58-28 S                                    | 494.000<br>TON                 | _____.     | _____.     |
| 0082                 | 465.0315<br>Asphaltic Flumes   | 9.000<br>SY                    | _____.     | _____.     |
| 0084                 | 465.0400<br>Asphaltic Shoulder Rumble Strips                             | 75.000<br>LF                   | _____.     | _____.     |
| 0086                 | 502.3101<br>Expansion Device   | 111.000<br>LF                  | _____.     | _____.     |
| 0088                 | 502.3111.S<br>Expansion Device Modular                                   | 161.000<br>LF                  | _____.     | _____.     |
| 0090                 | 502.3200<br>Protective Surface Treatment                                 | 191.000<br>SY                  | _____.     | _____.     |
| 0092                 | 502.3205<br>Pigmented Surface Sealer Reseal                              | 3,920.000<br>SY                | _____.     | _____.     |
| 0094                 | 505.0600<br>Bar Steel Reinforcement HS Coated Structures                 | 11,620.000<br>LB               | _____.     | _____.     |
| 0096                 | 505.0904<br>Bar Couplers No. 4   | 16.000<br>EACH                 | _____.     | _____.     |





Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description   | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0098                 | 505.0906<br>Bar Couplers No. 6  | 96.000<br>EACH                 | _____.     | _____.     |
| 0100                 | 509.1000<br>Joint Repair  | 203.000<br>SY                  | _____.     | _____.     |
| 0102                 | 509.1500<br>Concrete Surface Repair                                     | 360.000<br>SF                  | _____.     | _____.     |
| 0104                 | 509.2100.S<br>Concrete Masonry Deck Repair                              | 64.000<br>CY                   | _____.     | _____.     |
| 0106                 | 520.8000<br>Concrete Collars for Pipe                                   | 22.000<br>EACH                 | _____.     | _____.     |
| 0108                 | 521.1018<br>Apron Endwalls for Culvert Pipe Steel 18-Inch               | 5.000<br>EACH                  | _____.     | _____.     |
| 0110                 | 521.3112<br>Culvert Pipe Corrugated Steel 12-Inch                       | 20.000<br>LF                   | _____.     | _____.     |
| 0112                 | 521.3118<br>Culvert Pipe Corrugated Steel 18-Inch                       | 50.000<br>LF                   | _____.     | _____.     |
| 0114                 | 522.0124<br>Culvert Pipe Reinforced Concrete Class III 24-Inch          | 6.000<br>LF                    | _____.     | _____.     |
| 0116                 | 522.1015<br>Apron Endwalls for Culvert Pipe Reinforced Concrete 15-Inch | 1.000<br>EACH                  | _____.     | _____.     |
| 0118                 | 522.1018<br>Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch | 1.000<br>EACH                  | _____.     | _____.     |
| 0120                 | 522.1024<br>Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch | 2.000<br>EACH                  | _____.     | _____.     |
| 0122                 | 531.2030<br>Drilling Shaft 30-Inch                                      | 52.000<br>LF                   | _____.     | _____.     |
| 0124                 | 531.2036<br>Drilling Shaft 36-Inch                                      | 64.000<br>LF                   | _____.     | _____.     |
| 0126                 | 531.5220<br>Foundation Single-Shaft Type MF-II (structure) 01. S-44-307 | 2.000<br>EACH                  | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description   | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0128                 | 531.5220<br>Foundation Single-Shaft Type MF-II (structure) 02. S-44-310 | 2.000<br>EACH                  | _____.     | _____.     |
| 0130                 | 531.6010<br>Foundation Two-Shaft Type FC-I (structure) 01. S-44-308     | 1.000<br>EACH                  | _____.     | _____.     |
| 0132                 | 531.6010<br>Foundation Two-Shaft Type FC-I (structure) 02. S-44-309     | 1.000<br>EACH                  | _____.     | _____.     |
| 0134                 | 532.5220<br>Monotube Full Span Type II (structure) 01. S-44-307         | 1.000<br>EACH                  | _____.     | _____.     |
| 0136                 | 532.5220<br>Monotube Full Span Type II (structure) 02. S-44-310         | 1.000<br>EACH                  | _____.     | _____.     |
| 0138                 | 532.6010<br>Truss Cantilever 4-Chord Type I (structure) 01. S-44-308    | 1.000<br>EACH                  | _____.     | _____.     |
| 0140                 | 532.6010<br>Truss Cantilever 4-Chord Type I (structure) 02. S-44-309    | 1.000<br>EACH                  | _____.     | _____.     |
| 0142                 | 601.0409<br>Concrete Curb & Gutter 30-Inch Type A                       | 635.000<br>LF                  | _____.     | _____.     |
| 0144                 | 601.0551<br>Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type A         | 106.000<br>LF                  | _____.     | _____.     |
| 0146                 | 601.0590<br>Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBTT      | 305.000<br>LF                  | _____.     | _____.     |
| 0148                 | 603.0105<br>Concrete Barrier Single-Faced 32-Inch                       | 900.000<br>LF                  | _____.     | _____.     |
| 0150                 | 603.1142<br>Concrete Barrier Type S42                                   | 82.000<br>LF                   | _____.     | _____.     |
| 0152                 | 603.8000<br>Concrete Barrier Temporary Precast Delivered                | 13,435.000<br>LF               | _____.     | _____.     |
| 0154                 | 603.8125<br>Concrete Barrier Temporary Precast Installed                | 18,475.000<br>LF               | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description  | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0156                 | 604.0400<br>Slope Paving Concrete                                  | 152.000<br>SY                  | _____.     | _____.     |
| 0158                 | 604.9010.S<br>Slope Paving Repair Crushed Aggregate                | 35.000<br>CY                   | _____.     | _____.     |
| 0160                 | 606.0200<br>Riprap Medium  | 240.000<br>CY                  | _____.     | _____.     |
| 0162                 | 608.0312<br>Storm Sewer Pipe Reinforced Concrete Class III 12-Inch | 156.000<br>LF                  | _____.     | _____.     |
| 0164                 | 608.0324<br>Storm Sewer Pipe Reinforced Concrete Class III 24-Inch | 156.000<br>LF                  | _____.     | _____.     |
| 0166                 | 608.0412<br>Storm Sewer Pipe Reinforced Concrete Class IV 12-Inch  | 32.000<br>LF                   | _____.     | _____.     |
| 0168                 | 608.0415<br>Storm Sewer Pipe Reinforced Concrete Class IV 15-Inch  | 128.000<br>LF                  | _____.     | _____.     |
| 0170                 | 608.0418<br>Storm Sewer Pipe Reinforced Concrete Class IV 18-Inch  | 97.000<br>LF                   | _____.     | _____.     |
| 0172                 | 611.0530<br>Manhole Covers Type J                                  | 4.000<br>EACH                  | _____.     | _____.     |
| 0174                 | 611.0606<br>Inlet Covers Type B                                    | 3.000<br>EACH                  | _____.     | _____.     |
| 0176                 | 611.0624<br>Inlet Covers Type H                                    | 1.000<br>EACH                  | _____.     | _____.     |
| 0178                 | 611.0639<br>Inlet Covers Type H-S                                  | 2.000<br>EACH                  | _____.     | _____.     |
| 0180                 | 611.0642<br>Inlet Covers Type MS                                   | 1.000<br>EACH                  | _____.     | _____.     |
| 0182                 | 611.0654<br>Inlet Covers Type V                                    | 1.000<br>EACH                  | _____.     | _____.     |
| 0184                 | 611.2003<br>Manholes 3-FT Diameter                                 | 2.000<br>EACH                  | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description  | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0186                 | 611.2004<br>Manholes 4-FT Diameter                                   | 2.000<br>EACH                  | _____.     | _____.     |
| 0188                 | 611.3004<br>Inlets 4-FT Diameter                                     | 3.000<br>EACH                  | _____.     | _____.     |
| 0190                 | 611.3225<br>Inlets 2x2.5-FT  | 1.000<br>EACH                  | _____.     | _____.     |
| 0192                 | 611.3230<br>Inlets 2x3-FT  | 3.000<br>EACH                  | _____.     | _____.     |
| 0194                 | 611.3901<br>Inlets Median 1 Grate                                    | 1.000<br>EACH                  | _____.     | _____.     |
| 0196                 | 612.0206<br>Pipe Underdrain Unperforated 6-Inch                      | 200.000<br>LF                  | _____.     | _____.     |
| 0198                 | 612.0806<br>Apron Endwalls for Underdrain Reinforced Concrete 6-Inch | 4.000<br>EACH                  | _____.     | _____.     |
| 0200                 | 614.0220<br>Steel Thrie Beam Bullnose Terminal                       | 2.000<br>EACH                  | _____.     | _____.     |
| 0202                 | 614.0230<br>Steel Thrie Beam   | 125.000<br>LF                  | _____.     | _____.     |
| 0204                 | 614.0905<br>Crash Cushions Temporary                                 | 4.000<br>EACH                  | _____.     | _____.     |
| 0206                 | 614.2300<br>MGS Guardrail 3  | 7,754.000<br>LF                | _____.     | _____.     |
| 0208                 | 614.2310<br>MGS Guardrail 3 HS                                       | 213.000<br>LF                  | _____.     | _____.     |
| 0210                 | 614.2340<br>MGS Guardrail 3 L  | 225.000<br>LF                  | _____.     | _____.     |
| 0212                 | 614.2500<br>MGS Thrie Beam Transition                                | 630.000<br>LF                  | _____.     | _____.     |
| 0214                 | 614.2610<br>MGS Guardrail Terminal EAT                               | 30.000<br>EACH                 | _____.     | _____.     |
| 0216                 | 614.2620<br>MGS Guardrail Terminal Type 2                            | 16.000<br>EACH                 | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description  | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0218                 | 616.0204<br>Fence Chain Link 4-FT  | 155.000<br>LF                  | _____.     | _____.     |
| 0220                 | 616.0208<br>Fence Chain Link 8-FT  | 732.000<br>LF                  | _____.     | _____.     |
| 0222                 | 616.0210<br>Fence Chain Link 10-FT   | 324.000<br>LF                  | _____.     | _____.     |
| 0224                 | 618.0100<br>Maintenance And Repair of Haul Roads<br>(project) 01. 4685-29-60 | 1.000<br>EACH                  | _____.     | _____.     |
| 0226                 | 619.1000<br>Mobilization   | 1.000<br>EACH                  | _____.     | _____.     |
| 0228                 | 620.0300<br>Concrete Median Sloped Nose                                      | 30.000<br>SF                   | _____.     | _____.     |
| 0230                 | 624.0100<br>Water  | 163.200<br>MGAL                | _____.     | _____.     |
| 0232                 | 625.0100<br>Topsoil  | 5,390.000<br>SY                | _____.     | _____.     |
| 0234                 | 625.0500<br>Salvaged Topsoil   | 33,010.000<br>SY               | _____.     | _____.     |
| 0236                 | 627.0200<br>Mulching   | 4,840.000<br>SY                | _____.     | _____.     |
| 0238                 | 628.1504<br>Silt Fence   | 12,230.000<br>LF               | _____.     | _____.     |
| 0240                 | 628.1520<br>Silt Fence Maintenance   | 24,460.000<br>LF               | _____.     | _____.     |
| 0242                 | 628.1905<br>Mobilizations Erosion Control                                    | 8.000<br>EACH                  | _____.     | _____.     |
| 0244                 | 628.1910<br>Mobilizations Emergency Erosion Control                          | 4.000<br>EACH                  | _____.     | _____.     |
| 0246                 | 628.2004<br>Erosion Mat Class I Type B                                       | 880.000<br>SY                  | _____.     | _____.     |
| 0248                 | 628.2006<br>Erosion Mat Urban Class I Type A                                 | 29,800.000<br>SY               | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description                          | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0250                 | 628.2008<br>Erosion Mat Urban Class I Type B | 7,710.000<br>SY                | _____.     | _____.     |
| 0252                 | 628.7005<br>Inlet Protection Type A          | 19.000<br>EACH                 | _____.     | _____.     |
| 0254                 | 628.7010<br>Inlet Protection Type B          | 26.000<br>EACH                 | _____.     | _____.     |
| 0256                 | 628.7015<br>Inlet Protection Type C          | 6.000<br>EACH                  | _____.     | _____.     |
| 0258                 | 628.7504<br>Temporary Ditch Checks           | 725.000<br>LF                  | _____.     | _____.     |
| 0260                 | 628.7555<br>Culvert Pipe Checks              | 15.000<br>EACH                 | _____.     | _____.     |
| 0262                 | 628.7570<br>Rock Bags                        | 860.000<br>EACH                | _____.     | _____.     |
| 0264                 | 629.0210<br>Fertilizer Type B                | 24.100<br>CWT                  | _____.     | _____.     |
| 0266                 | 630.0130<br>Seeding Mixture No. 30           | 689.000<br>LB                  | _____.     | _____.     |
| 0268                 | 630.0300<br>Seeding Borrow Pit               | 130.000<br>LB                  | _____.     | _____.     |
| 0270                 | 630.0500<br>Seed Water                       | 864.100<br>MGAL                | _____.     | _____.     |
| 0272                 | 633.0100<br>Delineator Posts Steel           | 16.000<br>EACH                 | _____.     | _____.     |
| 0274                 | 633.0500<br>Delineator Reflectors            | 18.000<br>EACH                 | _____.     | _____.     |
| 0276                 | 633.1000<br>Delineators Barrier Wall         | 13.000<br>EACH                 | _____.     | _____.     |
| 0278                 | 633.5200<br>Markers Culvert End              | 9.000<br>EACH                  | _____.     | _____.     |
| 0280                 | 634.0616<br>Posts Wood 4x6-Inch X 16-FT      | 4.000<br>EACH                  | _____.     | _____.     |
| 0282                 | 637.1220<br>Signs Type I Reflective SH       | 384.000<br>SF                  | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description                                 | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0284                 | 637.2210<br>Signs Type II Reflective H              | 84.000<br>SF                   | _____.     | _____.     |
| 0286                 | 638.2102<br>Moving Signs Type II                    | 13.000<br>EACH                 | _____.     | _____.     |
| 0288                 | 638.2601<br>Removing Signs Type I                   | 2.000<br>EACH                  | _____.     | _____.     |
| 0290                 | 638.3100<br>Removing Structural Steel Sign Supports | 4.000<br>EACH                  | _____.     | _____.     |
| 0292                 | 642.5201<br>Field Office Type C                     | 1.000<br>EACH                  | _____.     | _____.     |
| 0294                 | 643.0300<br>Traffic Control Drums                   | 26,205.000<br>DAY              | _____.     | _____.     |
| 0296                 | 643.0420<br>Traffic Control Barricades Type III     | 2,321.000<br>DAY               | _____.     | _____.     |
| 0298                 | 643.0705<br>Traffic Control Warning Lights Type A   | 5,481.000<br>DAY               | _____.     | _____.     |
| 0300                 | 643.0715<br>Traffic Control Warning Lights Type C   | 13,823.000<br>DAY              | _____.     | _____.     |
| 0302                 | 643.0800<br>Traffic Control Arrow Boards            | 714.000<br>DAY                 | _____.     | _____.     |
| 0304                 | 643.0900<br>Traffic Control Signs                   | 11,461.000<br>DAY              | _____.     | _____.     |
| 0306                 | 643.0910<br>Traffic Control Covering Signs Type I   | 2.000<br>EACH                  | _____.     | _____.     |
| 0308                 | 643.0920<br>Traffic Control Covering Signs Type II  | 1.000<br>EACH                  | _____.     | _____.     |
| 0310                 | 643.1000<br>Traffic Control Signs Fixed Message     | 7.500<br>SF                    | _____.     | _____.     |
| 0312                 | 643.1050<br>Traffic Control Signs PCMS              | 271.000<br>DAY                 | _____.     | _____.     |
| 0314                 | 643.1070<br>Traffic Control Cones 42-Inch           | 25,200.000<br>DAY              | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description   | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0316                 | 643.1200.S<br>Portable Automated Real-Time Traffic Queue Warning System | 270.000<br>DAY                 | _____.     | _____.     |
| 0318                 | 643.3105<br>Temporary Marking Line Paint 4-Inch                         | 29,720.000<br>LF               | _____.     | _____.     |
| 0320                 | 643.3150<br>Temporary Marking Line Removable Tape 4-Inch                | 13,620.000<br>LF               | _____.     | _____.     |
| 0322                 | 643.3205<br>Temporary Marking Line Paint 8-Inch                         | 910.000<br>LF                  | _____.     | _____.     |
| 0324                 | 643.3960<br>Temporary Marking Removable Mask Out Tape 6-Inch            | 165.000<br>LF                  | _____.     | _____.     |
| 0326                 | 643.5000<br>Traffic Control   | 1.000<br>EACH                  | _____.     | _____.     |
| 0328                 | 644.1810<br>Temporary Pedestrian Barricade                              | 30.000<br>LF                   | _____.     | _____.     |
| 0330                 | 645.0120<br>Geotextile Type HR  | 770.000<br>SY                  | _____.     | _____.     |
| 0332                 | 646.1020<br>Marking Line Epoxy 4-Inch                                   | 1,130.000<br>LF                | _____.     | _____.     |
| 0334                 | 646.1040<br>Marking Line Grooved Wet Ref Epoxy 4-Inch                   | 116,900.000<br>LF              | _____.     | _____.     |
| 0336                 | 646.1555<br>Marking Line Grooved Contrast Permanent Tape 4-Inch         | 12,340.000<br>LF               | _____.     | _____.     |
| 0338                 | 646.3020<br>Marking Line Epoxy 8-Inch                                   | 860.000<br>LF                  | _____.     | _____.     |
| 0340                 | 646.3555<br>Marking Line Grooved Contrast Permanent Tape 8-Inch         | 19,210.000<br>LF               | _____.     | _____.     |
| 0342                 | 646.4505<br>Marking Line Same Day Paint 4-Inch                          | 129,250.000<br>LF              | _____.     | _____.     |
| 0344                 | 646.5020<br>Marking Arrow Epoxy   | 34.000<br>EACH                 | _____.     | _____.     |





Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description   | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0346                 | 646.5120<br>Marking Word Epoxy  | 14.000<br>EACH                 | _____.     | _____.     |
| 0348                 | 646.5420<br>Marking Aerial Enforcement Bar Epoxy                        | 16.000<br>EACH                 | _____.     | _____.     |
| 0350                 | 646.5520<br>Marking Outfall Epoxy                                       | 4.000<br>EACH                  | _____.     | _____.     |
| 0352                 | 646.6120<br>Marking Stop Line Epoxy 18-Inch                             | 246.000<br>LF                  | _____.     | _____.     |
| 0354                 | 646.8120<br>Marking Curb Epoxy  | 14.000<br>LF                   | _____.     | _____.     |
| 0356                 | 646.8220<br>Marking Island Nose Epoxy                                   | 1.000<br>EACH                  | _____.     | _____.     |
| 0358                 | 646.9000<br>Marking Removal Line 4-Inch                                 | 12,460.000<br>LF               | _____.     | _____.     |
| 0360                 | 646.9010<br>Marking Removal Line Water Blasting 4-Inch                  | 6,480.000<br>LF                | _____.     | _____.     |
| 0362                 | 646.9055<br>Marking Removal Line Grooved Contrast Permanent Tape 4-Inch | 12,800.000<br>LF               | _____.     | _____.     |
| 0364                 | 646.9155<br>Marking Removal Line Grooved Contrast Permanent Tape 8-Inch | 10,630.000<br>LF               | _____.     | _____.     |
| 0366                 | 650.4000<br>Construction Staking Storm Sewer                            | 12.000<br>EACH                 | _____.     | _____.     |
| 0368                 | 650.4500<br>Construction Staking Subgrade                               | 3,540.000<br>LF                | _____.     | _____.     |
| 0370                 | 650.5000<br>Construction Staking Base                                   | 620.000<br>LF                  | _____.     | _____.     |
| 0372                 | 650.5500<br>Construction Staking Curb Gutter and Curb & Gutter          | 460.000<br>LF                  | _____.     | _____.     |
| 0374                 | 650.7000<br>Construction Staking Concrete Pavement                      | 2,925.000<br>LF                | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description  | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0376                 | 650.7500<br>Construction Staking Concrete Barrier                              | 82.000<br>LF                   | _____.     | _____.     |
| 0378                 | 650.9911<br>Construction Staking Supplemental Control (project) 01. 4685-29-60 | 1.000<br>EACH                  | _____.     | _____.     |
| 0380                 | 650.9920<br>Construction Staking Slope Stakes                                  | 9,275.000<br>LF                | _____.     | _____.     |
| 0382                 | 652.0210<br>Conduit Rigid Nonmetallic Schedule 40 1-Inch                       | 670.000<br>LF                  | _____.     | _____.     |
| 0384                 | 652.0225<br>Conduit Rigid Nonmetallic Schedule 40 2-Inch                       | 125.000<br>LF                  | _____.     | _____.     |
| 0386                 | 652.0235<br>Conduit Rigid Nonmetallic Schedule 40 3-Inch                       | 15.000<br>LF                   | _____.     | _____.     |
| 0388                 | 652.0800<br>Conduit Loop Detector  | 256.000<br>LF                  | _____.     | _____.     |
| 0390                 | 653.0105<br>Pull Boxes Steel 12x24-Inch  | 4.000<br>EACH                  | _____.     | _____.     |
| 0392                 | 653.0900<br>Adjusting Pull Boxes   | 1.000<br>EACH                  | _____.     | _____.     |
| 0394                 | 653.0905<br>Removing Pull Boxes  | 4.000<br>EACH                  | _____.     | _____.     |
| 0396                 | 654.0113<br>Concrete Bases Type 13   | 1.000<br>EACH                  | _____.     | _____.     |
| 0398                 | 655.0230<br>Cable Traffic Signal 5-14 AWG                                      | 315.000<br>LF                  | _____.     | _____.     |
| 0400                 | 655.0240<br>Cable Traffic Signal 7-14 AWG                                      | 48.000<br>LF                   | _____.     | _____.     |
| 0402                 | 655.0260<br>Cable Traffic Signal 12-14 AWG                                     | 338.000<br>LF                  | _____.     | _____.     |
| 0404                 | 655.0305<br>Cable Type UF 2-12 AWG Grounded                                    | 676.000<br>LF                  | _____.     | _____.     |
| 0406                 | 655.0515<br>Electrical Wire Traffic Signals 10 AWG                             | 31.000<br>LF                   | _____.     | _____.     |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description   | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0408                 | 655.0610<br>Electrical Wire Lighting 12 AWG   | 300.000<br>LF                  | _____.     | _____.     |
| 0410                 | 655.0700<br>Loop Detector Lead In Cable   | 1,719.000<br>LF                | _____.     | _____.     |
| 0412                 | 655.0800<br>Loop Detector Wire  | 1,120.000<br>LF                | _____.     | _____.     |
| 0414                 | 657.0545<br>Monotube Arms 45-FT   | 1.000<br>EACH                  | _____.     | _____.     |
| 0416                 | 658.0173<br>Traffic Signal Face 3S 12-Inch  | 3.000<br>EACH                  | _____.     | _____.     |
| 0418                 | 658.5070<br>Signal Mounting Hardware (location) 01.<br>STH 441 SB & CTH CE                        | 1.000<br>EACH                  | _____.     | _____.     |
| 0420                 | 659.5000.S<br>Lamp, Ballast, LED, Switch Disposal by<br>Contractor                                | 2.000<br>EACH                  | _____.     | _____.     |
| 0422                 | 690.0150<br>Sawing Asphalt  | 70.000<br>LF                   | _____.     | _____.     |
| 0424                 | 690.0250<br>Sawing Concrete   | 14,865.000<br>LF               | _____.     | _____.     |
| 0426                 | 715.0603<br>Incentive Strength Concrete Barrier   | 491.000<br>DOL                 | 1.00000    | 491.00     |
| 0428                 | 715.0720<br>Incentive Compressive Strength<br>Concrete Pavement                                   | 876.000<br>DOL                 | 1.00000    | 876.00     |
| 0430                 | 740.0440<br>Incentive IRI Ride  | 74,645.000<br>DOL              | 1.00000    | 74,645.00  |
| 0432                 | 999.2000.S<br>Installing and Maintaining Bird Deterrent<br>System (station) 01. Station 424+50 SB | 1.000<br>EACH                  | _____.     | _____.     |
| 0434                 | 999.2000.S<br>Installing and Maintaining Bird Deterrent<br>System (station) 02. Station 583+10 NB | 1.000<br>EACH                  | _____.     | _____.     |
| 0436                 | ASP.1T0A<br>On-the-Job Training Apprentice at<br>\$5.00/HR  | 2,400.000<br>HRS               | 5.00000    | 12,000.00  |



Proposal Schedule of Items

Proposal ID: 20230214031 Project(s): 4685-29-60

Federal ID(s): WISC 2023242

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description  | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0438                 | ASP.1T0G<br>On-the-Job Training Graduate at \$5.00/HR                        | 3,040.000<br>HRS               | 5.00000    | 15,200.00  |
| 0440                 | SPV.0035<br>Special 01. Flowable Fill Material                               | 12.000<br>CY                   | _____.     | _____.     |
| 0442                 | SPV.0060<br>Special 01. Utility Line Opening (ULO)                           | 1.000<br>EACH                  | _____.     | _____.     |
| 0444                 | SPV.0060<br>Special 02. Storm Sewer Tap                                      | 9.000<br>EACH                  | _____.     | _____.     |
| 0446                 | SPV.0060<br>Special 03. Remove and Reinstall Noise Barrier Panel             | 4.000<br>EACH                  | _____.     | _____.     |
| 0448                 | SPV.0060<br>Special 04. Storm Sewer Plug                                     | 1.000<br>EACH                  | _____.     | _____.     |
| 0450                 | SPV.0060<br>Special 05. Mobilizations Emergency Shoulder Pavement Repair     | 2.000<br>EACH                  | _____.     | _____.     |
| 0452                 | SPV.0060<br>Special 06. Remove Traffic Signal (STH 441 SB & CTH CE)          | 1.000<br>EACH                  | _____.     | _____.     |
| 0454                 | SPV.0060<br>Special 07. Salvage and Reinstall Monotube (STH 441 SB & CTH CE) | 1.000<br>EACH                  | _____.     | _____.     |
| 0456                 | SPV.0090<br>Special 01. Removing Rumble Strips                               | 810.000<br>LF                  | _____.     | _____.     |
| 0458                 | SPV.0090<br>Special 02. Traffic Control Gawk Screen Furnished                | 13,435.000<br>LF               | _____.     | _____.     |
| 0460                 | SPV.0090<br>Special 03. Traffic Control Gawk Screen Installed                | 18,475.000<br>LF               | _____.     | _____.     |
| 0462                 | SPV.0090<br>Special 04. Cured In Place Pipe Liner, 18-Inch                   | 577.000<br>LF                  | _____.     | _____.     |
| 0464                 | SPV.0090<br>Special 05. Bridge Deck Crack Sealing                            | 5,272.000<br>LF                | _____.     | _____.     |
| 0466                 | SPV.0180<br>Special 01. Methacrylate Flood Seal                              | 14,453.000<br>SY               | _____.     | _____.     |



**Proposal Schedule of Items**

---

**Proposal ID:** 20230214031    **Project(s):** 4685-29-60

**Federal ID(s):** WISC 2023242

**Section:** 0001

**Total:** \_\_\_\_\_.

**Total Bid:** \_\_\_\_\_.

