



Wisconsin Department of Transportation

April 18, 2023

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #14: 2450-00-73, WISC 2023364
T Genesee, Genesee Rd
Saylesville Creek to Rockwood Trail
STH 59
Waukesha County

Letting of May 9, 2023

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
465.0105	Asphaltic Surface	Ton	125	- 125	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
12	Construction Details: Removed reference to asphaltic surface and changed to asphaltic material since asphaltic material is incidental to asphaltic base patching item.
67	Remove item 465.0105 Asphaltic Surface from MQ sheet

Schedule of Items

Attached, dated April 18, 2023, are the revised Schedule of Items Page 2.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 12 and 67

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman


Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

GENERAL NOTES:

BASE PATCHING ASPHALTIC SHALL BE COMPLETED DURING STAGE 1 AND 2A AS DIRECTED BY THE ENGINEER.
USE AS ENGINEER DIRECTS AND AT LOOP DETECTOR INSTALLATION LOCATIONS.
SEE SDD BASE PATCHING CONCRETE FOR ADDITIONAL INFORMATION.

STH 59 R/L

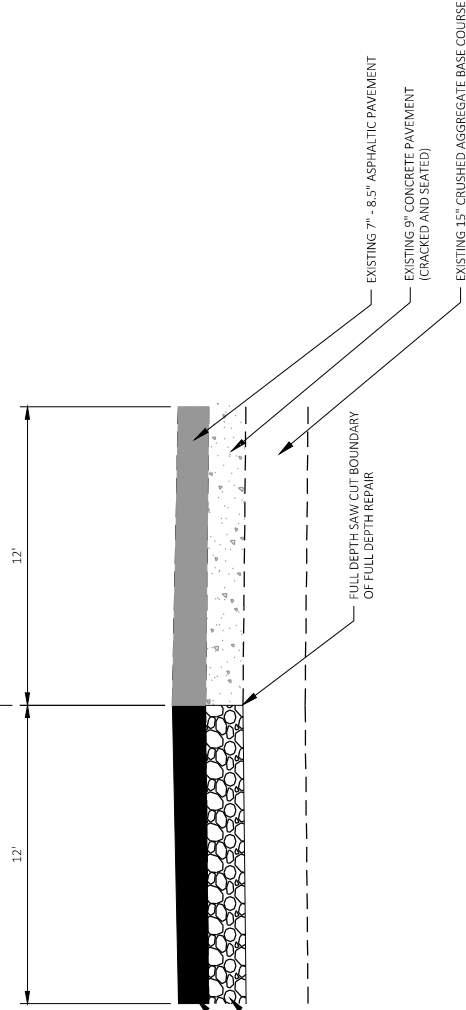

REMOVE ASPHALTIC SURFACE
PLACE WITH ASPHALTIC MATERIAL*
REMOVING CONCRETE PAVEMENT
PLACE SELECT CRUSHED MATERIAL

* PLACE ASPHALTIC MATERIAL IN TWO LIFTS
AND COMPACT WITH A ROLLER

BASE PATCHING ASPHALTIC

Addendum No. 01
ID 2450-00-73
Revised Sheet 12
April 18, 2023

PROJECT NO: 2450-00-73	COUNTY: WAUKESHA	CONSTRUCTION DETAILS	SHEET 12	E
FILE NAME: Y:\WILWAUKEE\2009S\2028\02\ENG_DOCS\2450073\SHETS\PLAN\02_00_L0.DWG	PLOT DATE: 4/17/2023 4:28 PM	PLOT BY: PAINE, GREGORY	PLOT NAME: 1 IN=10 FT	WISDOT/CADDS SHEET 12
HWY: STH 59				
LAYOUT NAME: 07				

HMA PAVEMENT									
450.4000	455.0605	460.6223	460.6224	465.0120	465.0125				
HMA COLD WEATHER PAVING	TACK COAT	HMA PAVEMENT 3 MT 58-28 S	HMA PAVEMENT 4 MT 58-28 S	ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES	ASPHALTIC SURFACE TEMPORARY				
TON	GAL	TON	TON	TON	TON				
STATION	STATION	LOCATION	STATION	STATION	STATION				
TO	TO	TO	TO	TO	TO				
STAGE 1									
0010	738+71	STH 59 RT	757+05	791	12	70			
STAGE 2									
0010	738+71	STH 59 LT	757+05	269	37	30			
0010	540+35	HILLSIDE RD	544+86	160	605	57			
STAGE 3									
0010	738+71	STH 59	757+05	1163	616	1146			
0010	540+35	HILLSIDE RD	544+86	160	222	-			
TOTAL 0010									
343 1,961 3,030 1,368 106 100									

GUARDRAIL									
204.0165	614.0397	614.2300	614.2610						
REMOVING GUARDRAIL	GUARDRAIL MOW STRIP EMULSIFIED ASPHALT	MGS GUARDRAIL	MGS GUARDRAIL	MGS GUARDRAIL	TERMINAL EXT				
LF	SY	LF	LF	LF	EACH				
STATION	STATION	LOCATION	STATION	STATION	STATION				
TO	TO	TO	TO	TO	TO				
STAGE 1									
0010	738+78	STH 59 RT	739+44	66	13	1			
STAGE 2									
0010	738+77	STH 59 LT	739+80	66	50	1			
TOTAL 0010									
132 82 63 2									

RUMBLE STRIPS									
465.0425									
ASPHALTIC SHOULDER									
RUMBLE STRIPS 2-LANE RURAL	LF	STATION	STATION	LOCATION	REMARKS				
LF	LF	TO	TO	TO					
STAGE 3									
0010	734+20	738+70	738+70	STH 59 LT & RT	TYPE I				
0010	739+00	757+05	757+05	STH 59 RT	TYPE I				
0010	739+00	742+20	742+20	STH 59 LT	TYPE I				
0010	757+05	763+00	763+00	STH 59 LT & RT	TYPE I				
TOTAL 0010									
3,745									

Addendum No. 01
 ID 2450-00-73
 Revised Sheet 67
 April 18, 2023



Proposal Schedule of Items

Proposal ID: 20230509014 Project(s): 2450-00-73

Federal ID(s): WISC 2023364

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	416.1010 Concrete Surface Drains	6.000 CY	_____.	_____.
0036	450.4000 HMA Cold Weather Paving	343.000 TON	_____.	_____.
0038	455.0605 Tack Coat	1,961.000 GAL	_____.	_____.
0040	460.2000 Incentive Density HMA Pavement	2,817.000 DOL	1.00000	2,817.00
0042	460.6223 HMA Pavement 3 MT 58-28 S	3,030.000 TON	_____.	_____.
0044	460.6224 HMA Pavement 4 MT 58-28 S	1,368.000 TON	_____.	_____.
0048	465.0120 Asphaltic Surface Driveways and Field Entrances	106.000 TON	_____.	_____.
0050	465.0125 Asphaltic Surface Temporary	100.000 TON	_____.	_____.
0052	465.0425 Asphaltic Shoulder Rumble Strips 2-Lane Rural	3,745.000 LF	_____.	_____.
0054	521.1502 Apron Endwalls for Culvert Pipe Sloped Side Drains Steel 15-Inch 4 to 1	2.000 EACH	_____.	_____.
0056	521.1503 Apron Endwalls for Culvert Pipe Sloped Side Drains Steel 18-Inch 4 to 1	4.000 EACH	_____.	_____.
0058	521.1524 Apron Endwalls for Culvert Pipe Sloped Side Drains Steel 24-Inch 6 to 1	5.000 EACH	_____.	_____.
0060	521.3118 Culvert Pipe Corrugated Steel 18-Inch	72.000 LF	_____.	_____.
0062	521.3124 Culvert Pipe Corrugated Steel 24-Inch	100.000 LF	_____.	_____.

