



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

February 2, 2024

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #32: 6999-16-73, WISC 2024257
C Mosinee, Main Street
4th Street to Rangeline Road
Main Street
Marathon County

Letting of February 13, 2024

This is Addendum No. 02, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
12	Adjusting Sanitary Manholes, Item SPV.0060.01

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
305.0120	Base Aggregate Dense 1 ¼-Inch	TON	200	150	350

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
204.0110	Removing Asphaltic Surface	SY	0	470	470

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
8	Construction Details (Spot Curb and Gutter Replacement)
45	Miscellaneous Quantities (Removing Pavement Items & Base Aggregate Dense Items)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 02

6999-16-73

February 2, 2024

12. Adjusting Sanitary Manholes, Item SPV.0060.01.

Replace paragraph three of section titled E Payment with the following:

Payment is full compensation for adjusting the manhole to finish grade; and for furnishing and installing Internal/External seal.

Schedule of Items


Attached, dated February 2, 2024, are the revised Schedule of Items Pages 1 and 5.

Plan Sheets


The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 8 and 45.

END OF ADDENDUM

Addendum No. 02
ID 6999-16-73
Revised Sheet 8
February 2, 2024

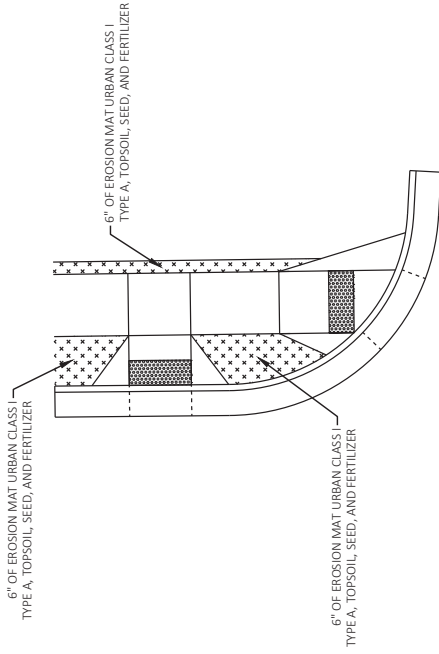


EROSION MAT URBAN AT CURB RAMPS / CURB REPLACEMENT / SIDEWALK REPLACEMENT DETAIL

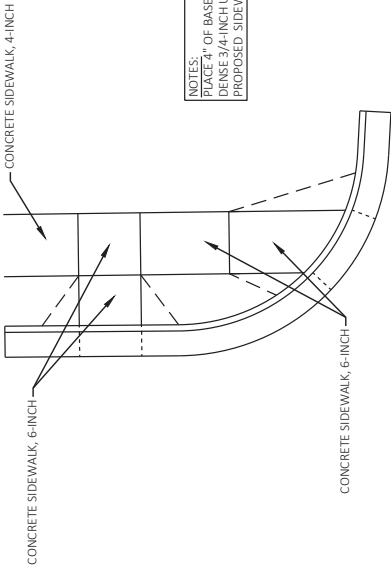


NOTES:
PLACE 4" OF BASE AGGREGATE
DENSE 3/4-INCH UNDER ALL
PROPOSED SIDEWALK LOCATIONS.

CONCRETE SIDEWALK AT CURB RAMPS DETAIL

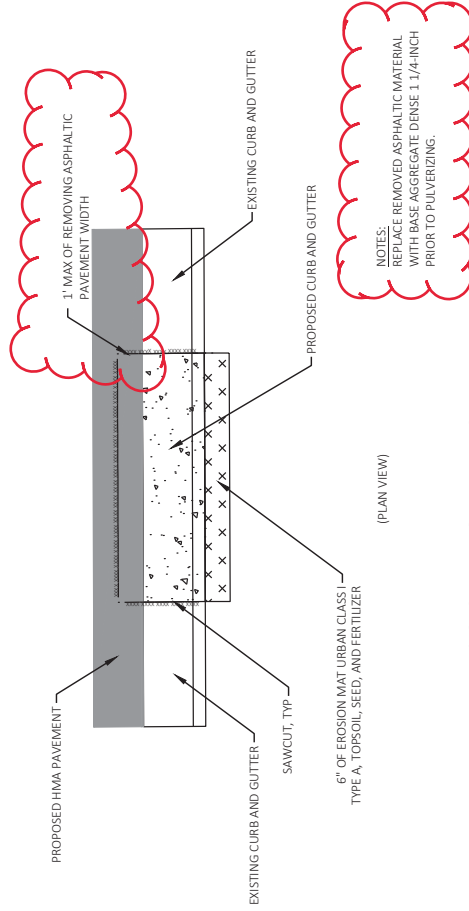

NOTES:
REPLACE REMOVED ASPHALTIC MATERIAL
WITH BASE AGGREGATE DENSE 1 1/4-INCH
PRIOR TO PULVERIZING.

SPOT CURB AND GUTTER REPLACEMENT DETAIL

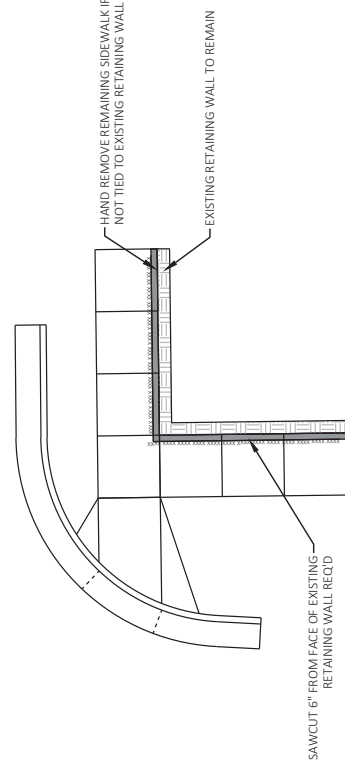

EXISTING RETAINING WALL AT CURB RAMPS REPLACEMENT DETAIL

Addendum No. 02
 ID 6999-16-73
 Revised Sheet 45
 February 2, 2024

REMOVING ASPHALTIC SURFACE BUTT JOINTS

STATION - STATION	LOCATION	SY	COMMENTS
101+00	BEGN	94	
107+86	OAK PARK CIR	38	
111+08	18TH ST	37	
114+29	17TH ST	37	
117+54	16TH ST	37	
120+84	15TH ST	37	
124+05	14TH ST	36	
127+31	13TH ST	37	
130+56	12TH ST	36	
148+89	11TH ST	37	
154+82	9TH ST	38	
158+04	8TH ST	37	
161+24	7TH ST	38	
164+43	6TH ST (LT)	38	
164+44	6TH ST (RT)	37	
167+67	5TH ST (LT)	37	
167+68	5TH ST (RT)	106	
170+50	END		
TOTAL		795	

REMOVING PAVEMENT ITEMS

STATION - STATION	LOCATION	SY	COMMENTS
101+00 - 168+00	CL	--	3" MILL
168+00 - 170+50	CL	1,050	3" MILL/FLL
101+00 - 170+50	CL	470	C&G REMOVAL
TOTAL		470	

REMOVING CURB AND GUTTER

STATION - STATION	LOCATION	LF	COMMENTS
101+00 - 170+50	LT/RT	480	CURB RAMP REPLACEMENTS
101+00 - 170+50	LT/RT	3,620	SPOT REPLACEMENTS
TOTAL		4,100	

REMOVING CONCRETE SIDEWALK

STATION - STATION	LOCATION	SY	COMMENTS
101+00 - 170+50	LT/RT	465	CURB RAMP REPLACEMENTS
101+00 - 170+50	LT/RT	400	SPOT REPLACEMENTS
TOTAL		865	

BASE AGGREGATE DENSE

STATION - STATION	LOCATION	TON	COMMENTS
110+00 - 170+50		200	
110+00 - 170+50		--	
TOTALS		200	

BASE AGGREGATE DENSE

STATION - STATION	LOCATION	TON	COMMENTS
110+00 - 170+50		350	
110+00 - 170+50		--	
TOTALS		350	

ASPHALTIC ITEMS

STATION - STATION	LOCATION	GAL	COMMENTS
101+00 - 170+50	CL	1,400	4,900
TOTALS		1,400	4,900

CONCRETE SIDEWALK ITEMS

STATION - STATION	LOCATION	LF	COMMENTS
101+00 - 170+50	LT/RT	130	2,000
101+00 - 170+50	LT/RT	--	400
168+02 - 168+22	RT	1	--
TOTALS		130	2,400

CONCRETE SIDEWALK ITEMS

STATION - STATION	LOCATION	SY	COMMENTS
101+00 - 170+50	LT/RT	4,225	4,225
101+00 - 170+50	LT/RT	--	400
168+02 - 168+22	RT	1	--
TOTALS		4,225	4,225

STRUCTURE ITEMS

STATION - STATION	LOCATION	EACH	COMMENTS
101+00 - 170+50	LT/RT/CL	1	6
101+00 - 170+50	LT/RT/CL	--	--
TOTALS		1	6

STRUCTURE ITEMS

STATION - STATION	LOCATION	EACH	COMMENTS
101+00 - 170+50	LT/RT/CL	12	12
101+00 - 170+50	LT/RT/CL	--	--
TOTALS		12	12

STRUCTURE ITEMS

STATION - STATION	LOCATION	EACH	COMMENTS
101+00 - 170+50	LT/RT/CL	17	17
101+00 - 170+50	LT/RT/CL	13	3
TOTALS		17	13

ASPHALTIC ITEMS

STATION - STATION	LOCATION	GAL	COMMENTS
101+00 - 170+50	CL	1,400	4,900
TOTALS		1,400	4,900

CONCRETE SIDEWALK ITEMS

STATION - STATION	LOCATION	LF	COMMENTS
101+00 - 170+50	LT/RT	480	CURB RAMP REPLACEMENTS
101+00 - 170+50	LT/RT	3,620	SPOT REPLACEMENTS
101+00 - 170+50	LT/RT	--	40
TOTALS		4,100	40

CONCRETE SIDEWALK ITEMS

STATION - STATION	LOCATION	SY	COMMENTS
101+00 - 170+50	LT/RT	480	CURB RAMP REPLACEMENTS
101+00 - 170+50	LT/RT	3,620	SPOT REPLACEMENTS
101+00 - 170+50	LT/RT	--	40
TOTALS		4,100	40

ASPHALTIC ITEMS

STATION - STATION	LOCATION	GAL	COMMENTS
101+00 - 170+50	CL	1,400	4,900
TOTALS		1,400	4,900

CONCRETE SIDEWALK ITEMS

STATION - STATION	LOCATION	LF	COMMENTS
101+00 - 170+50	LT/RT	480	CURB RAMP REPLACEMENTS
101+00 - 170+50	LT/RT	3,620	SPOT REPLACEMENTS
101+00 - 170+50	LT/RT	--	40
TOTALS		4,100	40

CONCRETE SIDEWALK ITEMS

STATION - STATION	LOCATION	SY	COMMENTS
101+00 - 170+50	LT/RT	480	CURB RAMP REPLACEMENTS
101+00 - 170+50	LT/RT	3,620	SPOT REPLACEMENTS
101+00 - 170+50	LT/RT	--	40
TOTALS		4,100	40

STRUCTURE ITEMS

STATION - STATION	LOCATION	EACH	COMMENTS
101+00 - 170+50	LT/RT/CL	1	6
101+00 - 170+50	LT/RT/CL	--	--
TOTALS		1	6

STRUCTURE ITEMS

STATION - STATION	LOCATION	EACH	COMMENTS
101+00 - 170+50	LT/RT/CL	12	12
101+00 - 170+50	LT/RT/CL	--	--
TOTALS		12	12

STRUCTURE ITEMS

STATION - STATION	LOCATION	EACH	COMMENTS
101+00 - 170+50	LT/RT/CL	17	17
101+00 - 170+50	LT/RT/CL	13	3
TOTALS		17	13

STRUCTURE ITEMS

STATION - STATION	LOCATION	EACH	COMMENTS
101+00 - 170+50	LT/RT/CL	17	17
101+00 - 170+50	LT/RT/CL	13	3
TOTALS		17	13

STRUCTURE ITEMS

STATION - STATION	LOCATION	EACH	COMMENTS
101+00 - 170+50	LT/RT/CL	17	17
101+00 - 170+50	LT/RT/CL	13	3
TOTALS		17	13

STRUCTURE ITEMS

STATION - STATION	LOCATION	EACH	COMMENTS
101+00 - 170+50	LT/RT/CL	17	17
101+00 - 170+50	LT/RT/CL	13	3
TOTALS		17	13



Proposal Schedule of Items

Proposal ID: 20240213032 Project(s): 6999-16-73

Federal ID(s): WISC 2024257

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0115 Removing Asphaltic Surface Butt Joints	795.000 SY	_____.	_____.
0004	204.0120 Removing Asphaltic Surface Milling	1,050.000 SY	_____.	_____.
0006	204.0150 Removing Curb & Gutter	4,100.000 LF	_____.	_____.
0008	204.0155 Removing Concrete Sidewalk	865.000 SY	_____.	_____.
0010	204.0220 Removing Inlets	1.000 EACH	_____.	_____.
0012	204.9180.S Removing (item description) 01. Excess Pulverized Material	27,350.000 SY	_____.	_____.
0014	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 6999-16-73	1.000 EACH	_____.	_____.
0016	213.0100 Finishing Roadway (project) 01. 6999-16-73	1.000 EACH	_____.	_____.
0018	305.0110 Base Aggregate Dense 3/4-Inch	200.000 TON	_____.	_____.
0020	305.0120 Base Aggregate Dense 1 1/4-Inch	350.000 TON	_____.	_____.
0022	325.0100 Pulverize and Relay	27,350.000 SY	_____.	_____.
0024	405.1000 Stamping Colored Concrete	1.000 CY	_____.	_____.
0026	455.0605 Tack Coat	1,400.000 GAL	_____.	_____.
0028	460.2000 Incentive Density HMA Pavement	3,140.000 DOL	1.00000	3,140.00
0030	460.5224 HMA Pavement 4 LT 58-28 S	4,900.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20240213032 Project(s): 6999-16-73

Federal ID(s): WISC 2024257

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0124	690.0250 Sawing Concrete	520.000 LF	_____.	_____.
0126	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0128	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	600.000 HRS	5.00000	3,000.00
0130	SPV.0060 Special 01. Adjusting Sanitary Manholes	17.000 EACH	_____.	_____.
0132	SPV.0060 Special 02. Adjusting Water Valve Boxes	13.000 EACH	_____.	_____.
0134	SPV.0060 Special 03. Adjusting Water Manholes	3.000 EACH	_____.	_____.
0136	460.2000 Incentive Density HMA Pavement	3,140.000 DOL	1.00000	3,140.00
0138	204.0110 Removing Asphaltic Surface	470.000 SY	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

