


| SIDEWALK WIDTH | BOLT ③ LENGTH |
|---|---|
| 6'-0" | 17½" |
| 7'-0" | 17¾" |
| 8'-0" | 18¼" |
| 9'-0" | 18¾" |
| 10'-0" | 19" |

SECTION THRU RAILING ON SIDEWALK

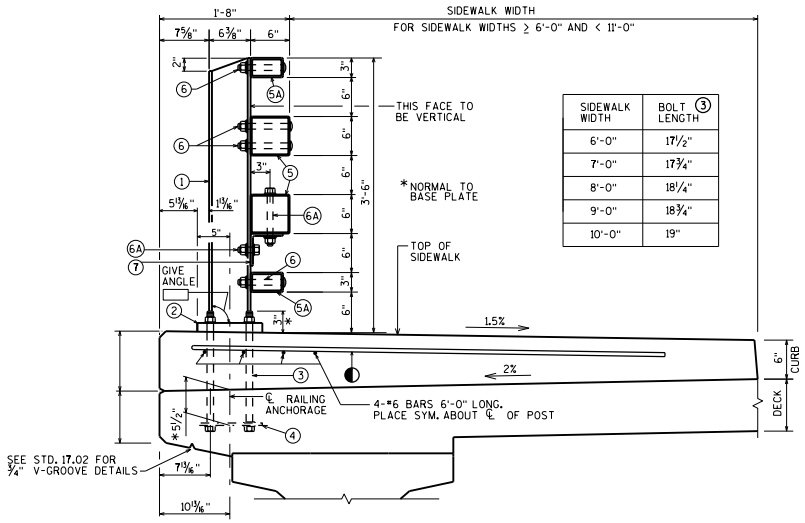


| SIDEWALK WIDTH | BOLT ③ LENGTH |
|---|---|
| ≥ 11'-0" | 11½" |

SECTION THRU RAILING ON SIDEWALK

## LEGEND

① W6 X 25 WITH 1⅛" X 1⅜" HORIZONTAL SLOTTED HOLES ON EACH SIDE OF POST FOR BOLT NO. 6 AT TOP TWO RAILS. USE 1" DIA. HOLES FOR BOLT NO. 6 AT BOTTOM NO. 5A & FOR BOLT NO. 6A AT NO. 7. CUT BOTTOM OF POST TO MATCH CROSS SLOPE OF ROADWAY. PLACE POST VERTICAL. PLACE POSTS NORMAL TO GRADE LINE.

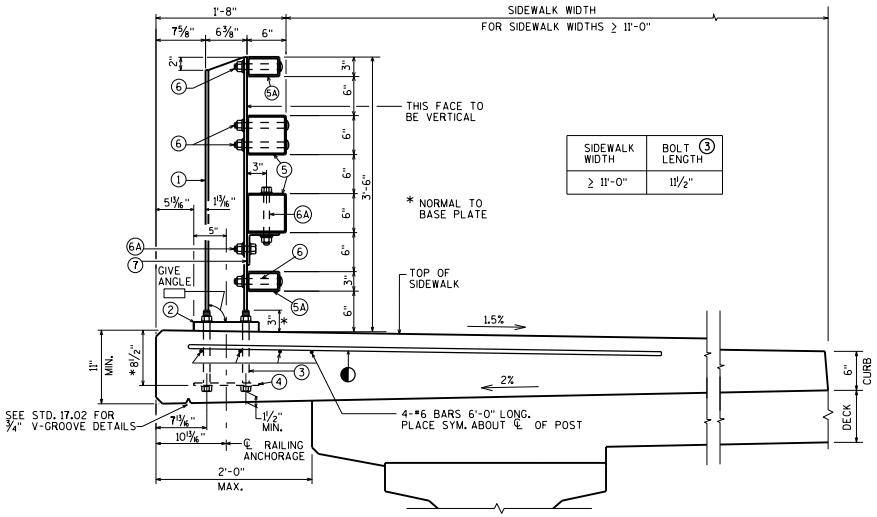② PLATE 1¼" X 10" X 1'-2" WITH 1⅛" X 1⅜" SLOTTED HOLES FOR ANCHOR BOLTS NO. 3. WELD TO NO. 1 AS SHOWN. SLOTS PARALLEL TO SHORT SIDE OF PLATE.

③ ASTM A449 - 1" DIA. ANCHOR BOLTS WITH HEAVY HEX NUT AND 2" O.D. HARDENED WASHER (ALL GALVANIZED). 4 REQUIRED PER POST. THREAD 3" AND PLACE NORMAL TO PLATE NO. 2. CHAMFER TOP OF BOLTS BEFORE THREADING. USE 11½" LONG BOLT FOR CONCRETE SIDEWALKS ≥ 11'-0" WIDE AND SEE TABLE TO THE LEFT FOR CONCRETE SIDEWALKS ≥ 6'-0" AND < 11'-0" WIDE FOR PROPER BOLT LENGTHS. USE 1'-9" LONG IN ABUTMENT WINGS. (AN EQUIVALENT THREADED ROD WITH HEAVY HEX NUTS AND HARDENED WASHERS MAY BE SUBSTITUTED FOR ANCHOR BOLTS IN WINGS IF REQUIRED FOR CONSTRUCTABILITY.)

④ ⅜" X 10" X 1'-2" ANCHOR PLATE (GALVANIZED) WITH 1⅛" DIA. HOLES FOR ANCHOR BOLTS NO. 3.

⑤ TS 6 X 6 X ⅜" STRUCTURAL TUBING. USE 1" DIA. HOLES FOR BOLT NO. 6 (FRONT & BACK) & ⅞" DIA. HOLES FOR BOLT NO. 6A (TOP & BOTTOM).

⑤A TS 5 X 3 X ¼" STRUCTURAL TUBING. USE 1" DIA. HOLES FOR BOLT NO. 6 IN TOP RAIL (FRONT & BACK). USE 1⅛" X 1⅜" HORIZONTAL SLOTTED HOLES FOR BOLT NO. 6 IN BOTTOM RAIL (FRONT & BACK) AND A 2" O.D. WASHER UNDER BOLT HEAD.

⑥ ⅞" DIA. A325 SLOTTED ROUND HEAD BOLT WITH HEX NUT, ⅜" X 1¾" X 1¾" WASHER, AND SPRING LOCK WASHER (2 REQUIRED AT RAIL TO POST LOCATIONS SHOWN).

⑥A ¾" DIA. A325 BOLT WITH HEX NUT AND SPRING LOCK WASHER (1 REQUIRED AT RAIL TO ANGLE AND 2 REQUIRED AT ANGLE TO POST LOCATIONS SHOWN WITH ⅜" X 1¾" X 1¾" WASHER).

⑦ L 5 X 5 X ⅝" STRUCTURAL ANGLE. ATTACH TO NO. 1 AND NO. 5 AS SHOWN.

◐ #6 BARS X 12'-0" LONG. BEND AS SHOWN. TIE TO TOP MAT OF STEEL. (DESIGNER TO PLACE THESE BARS IN BILL OF BARS FOR SUPERSTRUCTURE.)

FOR ALL TUBULAR STEEL RAILING TYPE NY4 DETAILS SEE STD. 30.27.

# SIDEWALK DETAILS FOR TUBULAR STEEL RAILING TYPE NY4

BUREAU OF STRUCTURES

APPROVED: Bill Oliva

DATE: 7-16

STANDARD 30.29