



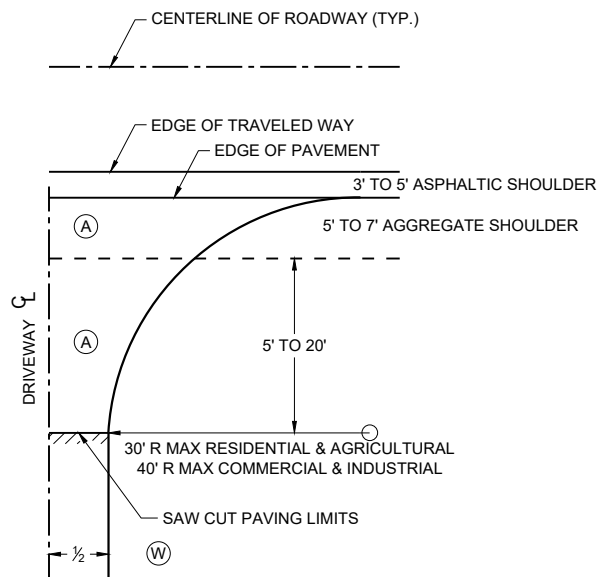


**PLAN VIEW
HALF SECTION**


- (A) : PAID FOR AS ASPHALTIC SURFACE DRIVEWAYS
AND FIELD ENTRANCES. (TON)
- (B) : PAID FOR AS BASE AGGREGATE DENSE 1 1/4" (TON)
- (W) : DRIVEWAY WIDTHS (MEASURED AT ROW LINE)
~ COMMERCIAL & INDUSTRIAL 16' MIN. - 35' MAX.
~ RESIDENTIAL & AGRICULTURAL 16' MIN. - 24' MAX.
(NONCOMMERCIAL)

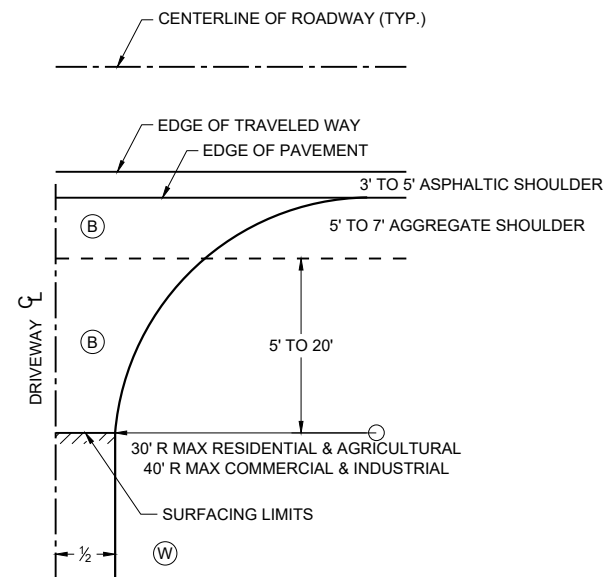

**PLAN VIEW
HALF SECTION**

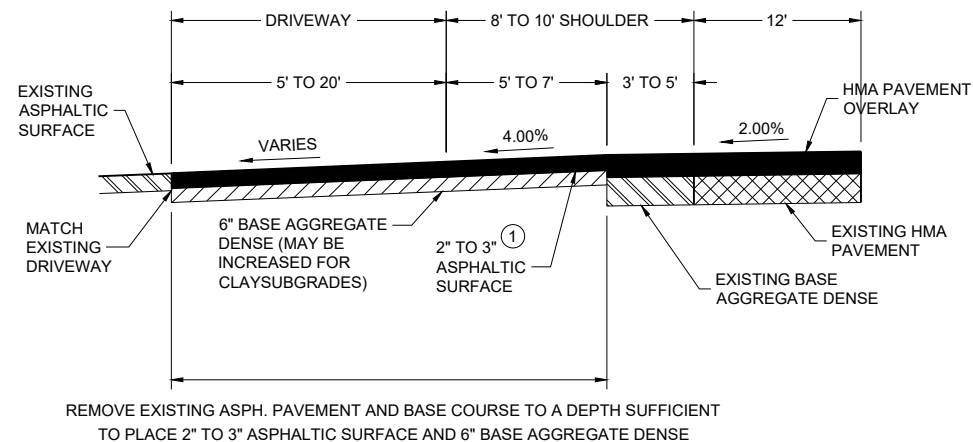

**PROFILE VIEW
RURAL ENTRANCE
WITH ASPHALTIC SURFACE
RESURFACING PROJECTS**

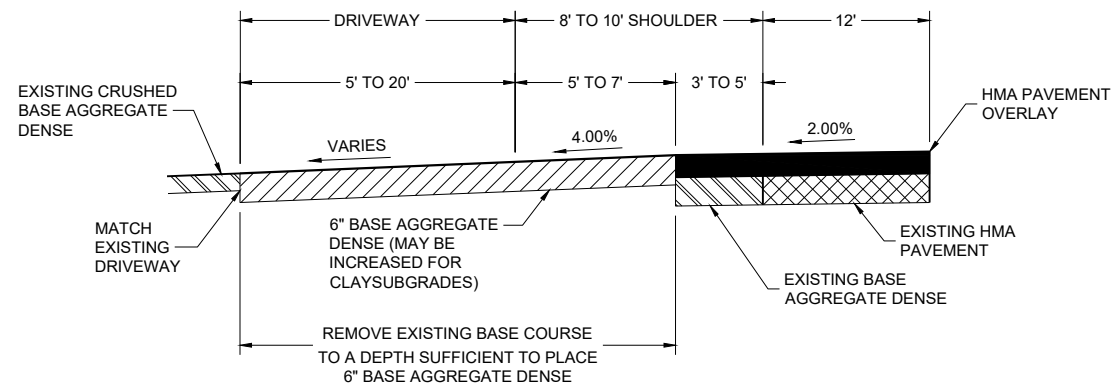

**PROFILE VIEW
RURAL ENTRANCE
WITH AGGREGATE SURFACE
6" BASE AGGREGATE DENSE
RESURFACING PROJECTS**

GENERAL NOTES

- ① DESIGN WILL DETERMINE FINAL DRIVEWAY ASPHALTIC THICKNESS
BASED ON TYPE OF USAGE AND LOADINGS.

**DRIVEWAYS WITHOUT CURB
AND GUTTER RESURFACING
PROJECTS RURAL**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2025 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT UNIT SUPERVISOR

FHWA

*Driveways without Curb & Gutter Resurfacing Projects Rural***References:**

Guide for the Geometric Design of Driveways, NCHRP Report 659, Transportation Research Board
[FDM 11-25-48](#) Driveways

Bid items associated with this drawing:

<u>ITEM NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
204.0110	Removing Asphaltic Surface	SY
204.0120	Removing Asphaltic Surface Milling.....	SY
305.0120	Base Aggregate Dense 1 1/4-inch	Ton
465.0120	Asphaltic Surface Driveways and Field Entrances	Ton

Standardized Special Provisions associated with this drawing:

<u>STSP NUMBER</u>	<u>TITLE</u>
NONE	

Other SDDs associated with this drawing:

[SDD 9A14](#) Driveways without Curb & Gutter

Design Notes:

Consult with Region Access Management Staff prior to matching existing width if less than 16' or greater than 35'.

Label driveway widths and locations on the Plan and Profile Sheets.

Label elevations, offsets and percent grades on Cross Sections.

Contact Person:

John Jenkins (608-267-6975)