
SDD 08D22 Driveways without Curb and Gutter Resurfacing Projects Rural

GENERAL NOTES

(1) DESIGN WILL DETERMINE FINAL DRIVEWAY ASPHALTIC THICKNESS BASED ON TYPE OF USAGE AND LOADINGS.

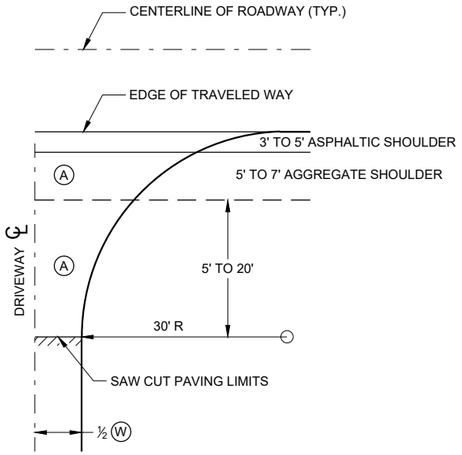


PLAN VIEW

Ⓐ : PAID FOR AS ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES. (TON)


Ⓑ : PAID FOR AS BASE AGGREGATE DENSE 1 ¼" (TON)

Ⓦ : DRIVEWAY WIDTH 16' MIN. - 24' MAX.

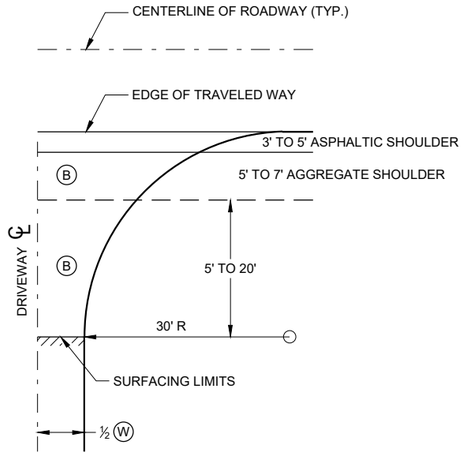

PLAN VIEW

HALF SECTION

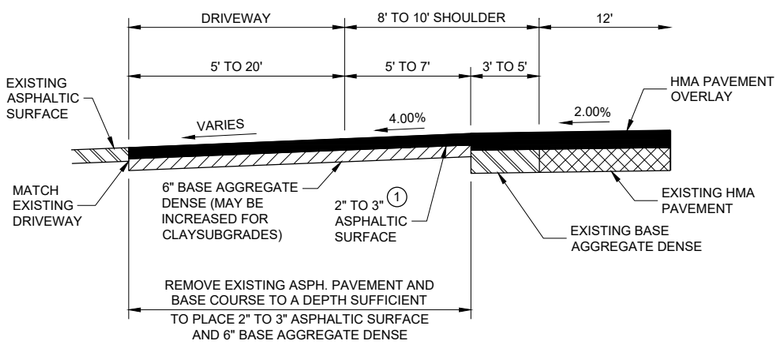


PROFILE VIEW

RURAL ENTRANCE
WITH ASPHALTIC SURFACE
RESURFACING PROJECTS

PLAN VIEW

HALF SECTION

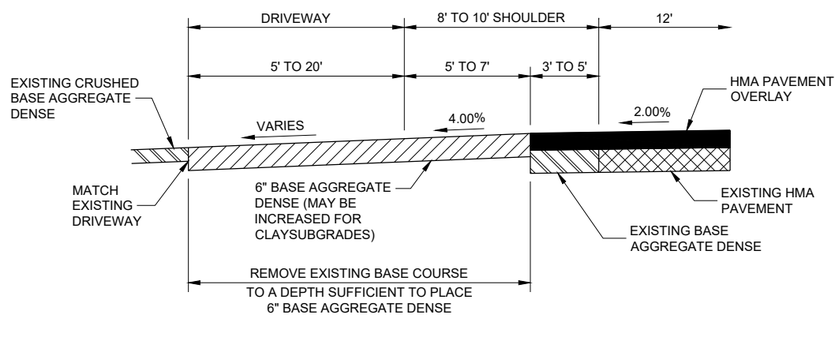

PROFILE VIEW

RURAL ENTRANCE
WITH AGGREGATE SURFACE
6" BASE AGGREGATE DENSE
RESURFACING PROJECTS

DRIVEWAYS WITHOUT CURB AND GUTTER RESURFACING PROJECTS RURAL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
December 2016
DATE

/S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT ENGINEER

FHWA

Version 1 **Standard Detail Drawing 8D22** *May, 2024*

Driveways without Curb & Gutter Resurfacing Projects Rural

References:

Guide for the Geometric Design of Driveways, NCHRP Report 659, Transportation Research Board
FDM 11-20-10 Driveways

Bid items associated with this drawing:

ITEM NUMBER	DESCRIPTION	UNIT
204.0110	Removing Asphaltic Surface	SY
204.0120	Removing Asphaltic Surface Milling	SY
305.0120	Base Aggregate Dense 1 ¼-inch	Ton
465.0120	Asphaltic Surface Driveways and Field Entrances	Ton

Standardized Special Provisions associated with this drawing:

STSP NUMBER	TITLE
NONE	

Other SDDs associated with this drawing:

SDD 8D21 Driveways without Curb & Gutter

Design Notes:

Label driveway widths and locations on the Plan and Profile Sheets.

Label elevations, offsets and percent grades on Cross Sections.

Contact Person:

John Jenkins (608-267-6975)