



SDD 09F16 Two Loop Detector Installed in New Concrete Pavement Round CSCP Pull Box 45 Degree Elbows to Pull Box

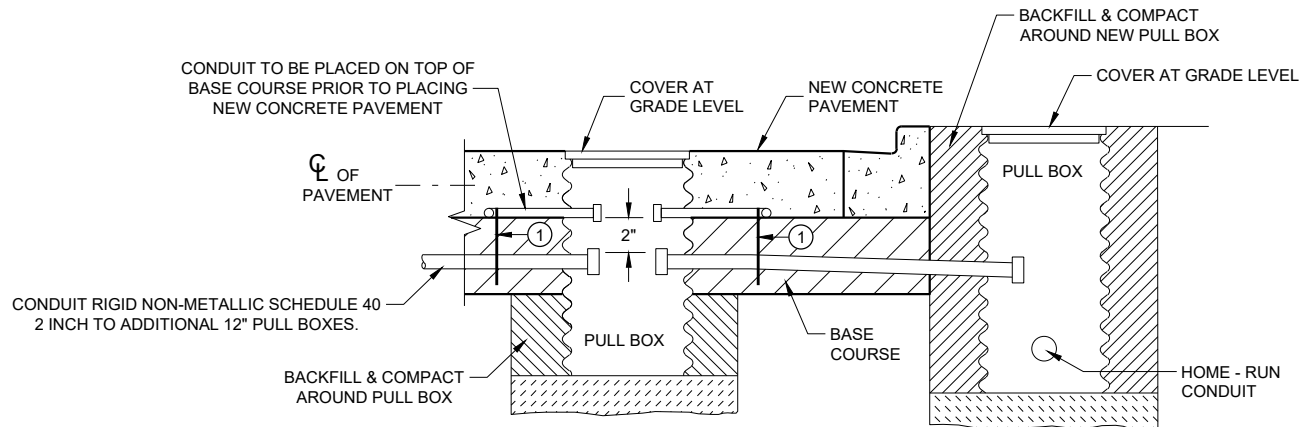

**SECTION A - A
CURB AND GUTTER
LOOP DETECTOR INSTALLATION DETAIL**

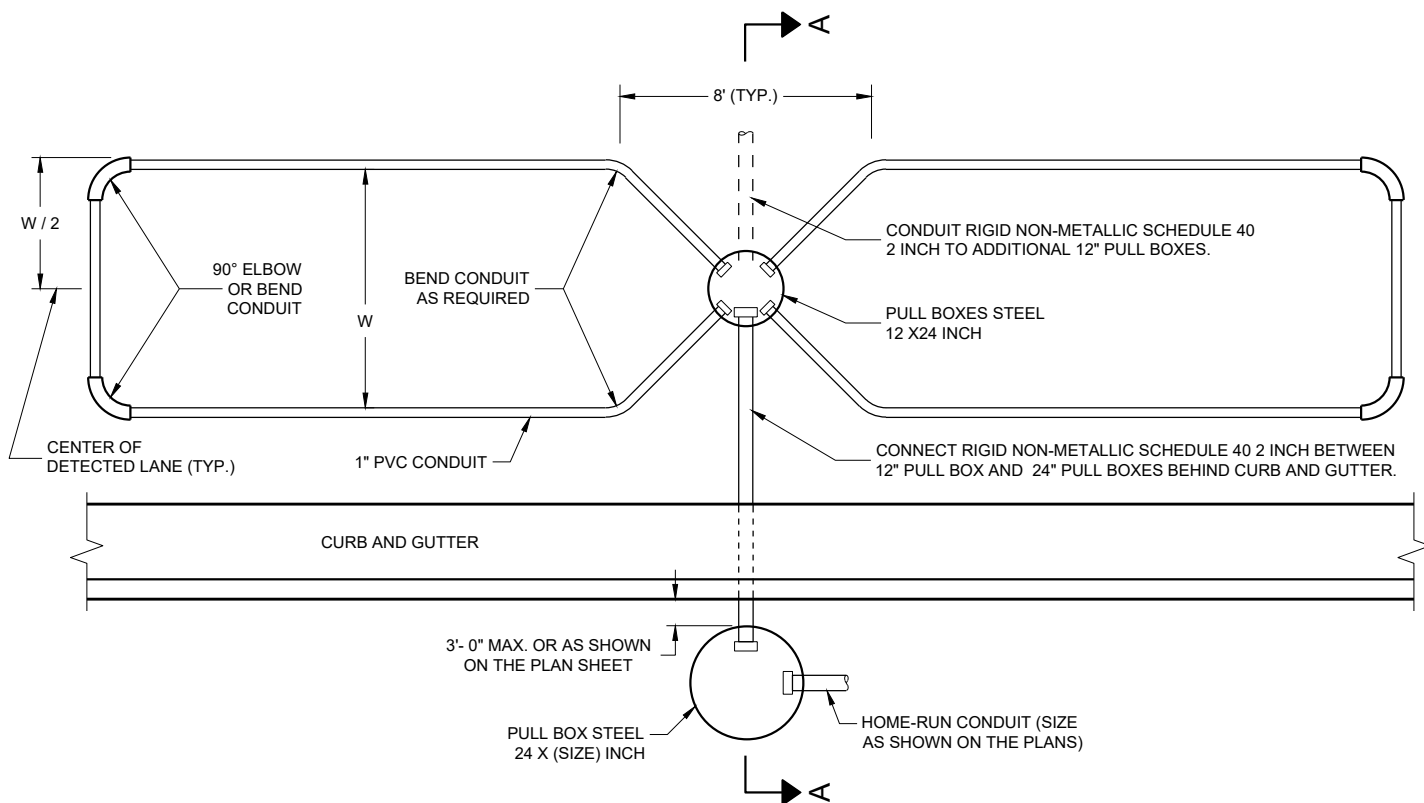

**TYPICAL PLAN OF LOOP DETECTOR
WITH 12\"/>**

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PITCH LEAD OUT CONDUIT TO DRAIN TO ROADSIDE PULL BOX.

LOOP SIZE, LOCATION, NUMBER OF TURNS OF WIRE AND ASSOCIATED SIGNAL PHASE SHALL BE AS SHOWN ON THE PLANS.

SPICES SHALL BE INSTALLED BY USING CAST IN PLACE SPICE KITS LISTED ON THE DEPARTMENTS APPROVED PRODUCTS LIST OR AN ENGINEER APPROVED EQUAL. NON-INSULATED BUTT SPICES TO FIT #12 AWG STRANDED WIRE SHALL BE USED. SPICES SHALL BE SOLDERED AND INSULATED FROM EACH OTHER AS PER INSTRUCTIONS INCLUDED IN THE SPICE KIT.

THE GROUND RESISTANCE READING OF THE LOOP SHALL READ "INFINITY" TO GROUND ON AN OHMMETER USING A MULTIPLIER SCALE OF 1 MEGOHM AND AN INPUT RESISTANCE OF 11 MEGOHMS MINIMUM BEFORE SPICING THE LOOP TO THE LEAD-IN CABLE.

AFTER SPICING THE LOOP WIRE TO THE LOOP LEAD-IN CABLE, THE CONTRACTOR SHALL MEASURE INDUCTANCE, GROUND RESISTANCE AND WIRE RESISTANCE AT THE CABINET END OF THE LEAD-IN CABLE AND FURNISH A COPY OF THE READING TO THE PROJECT ENGINEER FOR EVALUATION.

LOOP DETECTOR LEADS SHALL BE IDENTIFIED WITH THEIR ASSOCIATED LOOP BY USE OF WATERPROOF TAGS AT BOTH ENDS OF THE CABLE. A LISTING OF THE CABLE IDENTIFICATION PER INDIVIDUAL LOOP LEAD-IN SHALL BE PLACED IN THE CABINET.

THE #12 AWG LOOP WIRE FROM THE LOOP TO THE ROADSIDE PULL BOX, SHALL BE HAND TWISTED AT LEAST 3 TWISTS PER FOOT BEFORE INSTALLATION.

SPICES OF LOOP WIRE TO LEAD-IN CABLE SHALL BE MADE ONLY IN PULL BOXES AT THE SIDE OF THE ROAD.

THE #12 AWG LOOP WIRE SHALL BE INSTALLED FROM THE ROADSIDE PULL BOX, INTO THE PULL BOX IN THE PAVEMENT, THROUGH THE LOOP CONDUIT, BACK TO THE ROADSIDE PULL BOX, AND BE INSTALLED IN ONE NON-SPICED CONTINUOUS LENGTH.


ANY PVC LEAD-OUT CONDUIT CONTAINING LOOP LEAD-IN CABLES SHALL BE 2 INCHES.

PROTECTION OF THE PULL BOX IN THE BASE COURSE AND THE RELATED CONDUITS SHALL BE REQUIRED AFTER INSTALLATION AND BEFORE NEW CONCRETE PAVEMENT IS POURED. ANY DAMAGE THAT OCCURS DUE TO FAILURE TO PROTECT THE INSTALLATION SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.

SHOULD INSTALLATION REPAIR BE REQUIRED, IT SHALL BE ACCOMPLISHED UNDER THE DIRECTION OF THE PROJECT ENGINEER.

12 INCH PULL BOXES IN PAVEMENT SHALL BE CORRUGATED STEEL ONLY.

① HOLD DOWN PINS TO HOLD CONDUIT DURING POUR. HOLD DOWN PINS ARE REQUIRED TO STABILIZE THE LOOP TO MEET THE DIMENSIONAL CONSTRUCTION REQUIREMENTS OF THE PLANS. THE NUMBER OF HOLD DOWN PINS SHALL BE DETERMINED IN THE FIELD BY THE PROJECT ENGINEER.

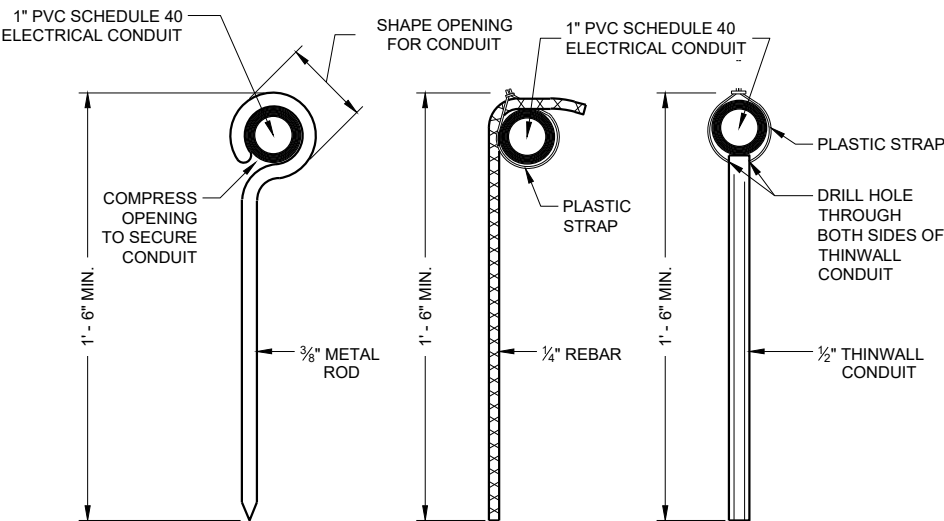

TYPICAL DETAILS FOR HOLD DOWN PINS ①

**TWO LOOP DETECTORS
INSTALLED IN NEW CONCRETE
PAVEMENT ROUND CSCP PULL
BOX 45° ELBOWS TO PULL BOX**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
September 2014 /S/ Ahmet Demirelek
DATE STATE ELECTRICAL ENGINEER

FHWA

*Two Loop Detectors Installed in New Concrete Pavement Round CSCP Pull Box 45 Degree
Elbows to Pull Box*

References:

[FDM15-5 Attachment 30.5](#) and [30.6](#) for conventional symbols

[Standard Spec. 655](#) Electrical Wiring

[Standard Spec. 675](#) Controllers and Detectors

Bid items associated with this drawing:

<u>ITEM NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
652.0800	Conduit Loop Detector	LF
653.0100 - 0150	Pull boxes Steel (inch).....	EACH
653.0151 - 0179	Pull Boxes Non-Conductive (inch)	EACH
655.0700	Loop Detector Lead In Cable.....	LF
655.0800	Loop Detector Wire	LF

Standardized Special Provisions associated with this drawing:

<u>STSP NUMBER</u>	<u>TITLE</u>
NONE	

Other SDDs associated with this drawing:

SDD 9B2	Conduit
SDD 9B4	Pull Box
SDD 9B16	Pull Box Non-Conductive

Design Notes:

NONE

Contact Person:

Ahmet Demirbilek (414) 220-6801
(414) 322-9606 (Mobile)