


TYPICAL EXAMPLES

NOTES

1. All signs are Type II - Type H Reflective
2. Color:
Background - Green
Message - White - Type H Reflective
3. Message Series for $3\frac{3}{4}$ " L C is Series C and Series E for $4\frac{1}{2}$ " L C and 6" L C.
4. Overall length of these signs is in 6" increments.
5. Arrows as per standard plate A1-2.
6. Tilt arrow is always at 45°.
7. Center shorter destination over or under longer destination.
8. Each line of copy including arrow or a grouping of two lines with arrow are centered on the board.


* Minimum dimension normally height of upper case letter.

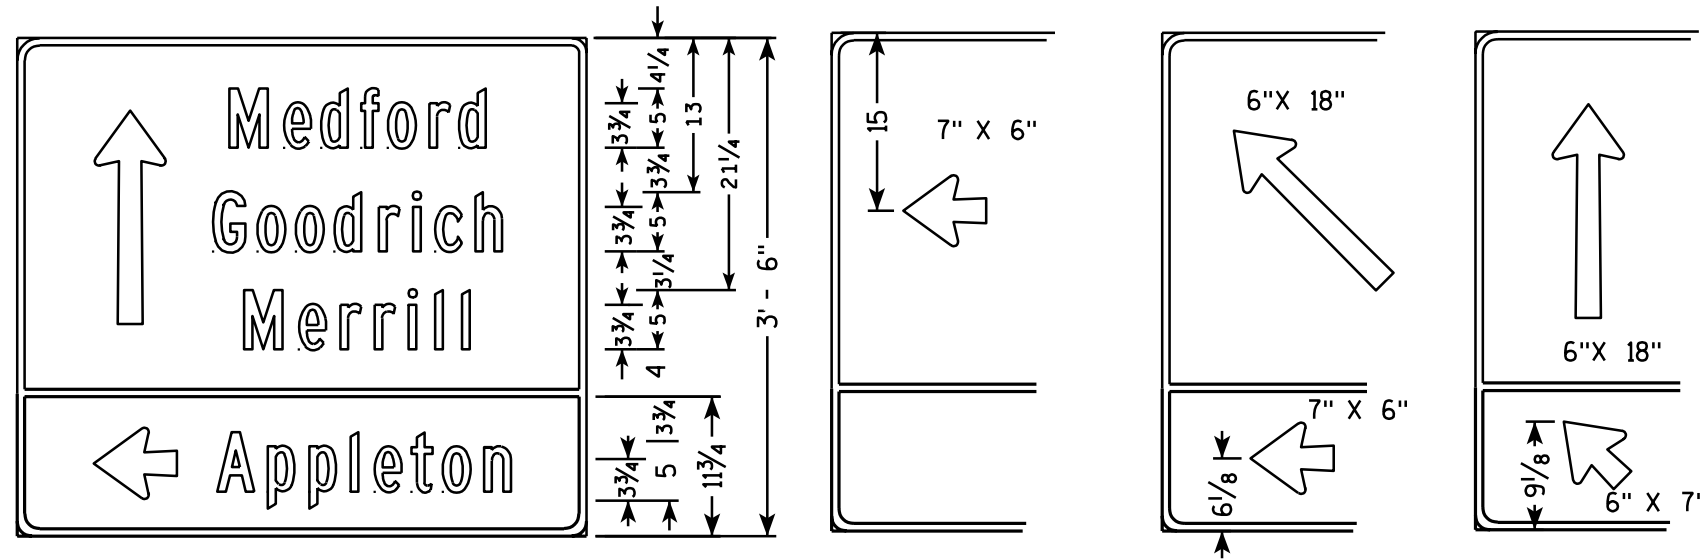

← * → ← 6 → ← 3 1/2 →
← * → ← 7 → ← 3 1/2 →

← * → 1 1/4" Radius
← * → 5/8" Border

TYPICAL ARROW PLACEMENTS

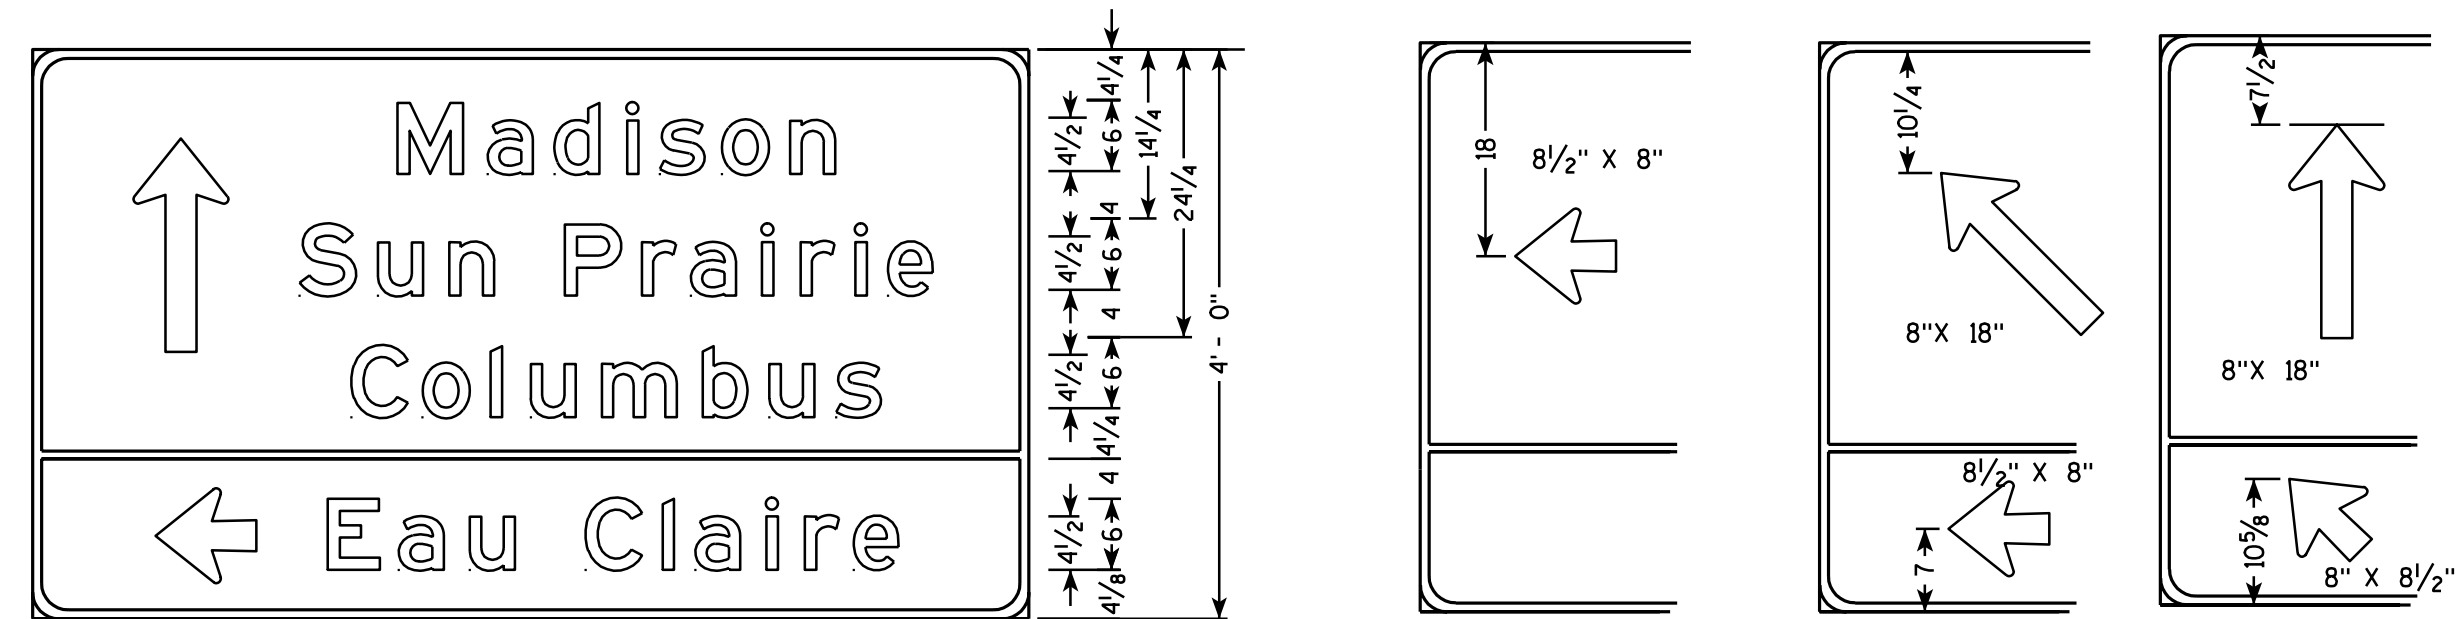

← * → ← 8 → ← 6 →
← * → ← 8 1/2 → ← 6 →

← * → 2 1/4" Radius
← * → 3/4" Border

TYPICAL ARROW PLACEMENTS

D1-4

D1-4

7

7

DESTINATION - DIRECTIONAL SIGNS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> For State Traffic Engineer
DATE 3/20/07	PLATE NO. A11-11 K.1