



STOP SIGN INSTALLATIONS AT CROSSBUCK LOCATIONS


30" X 30" STOP SIGN

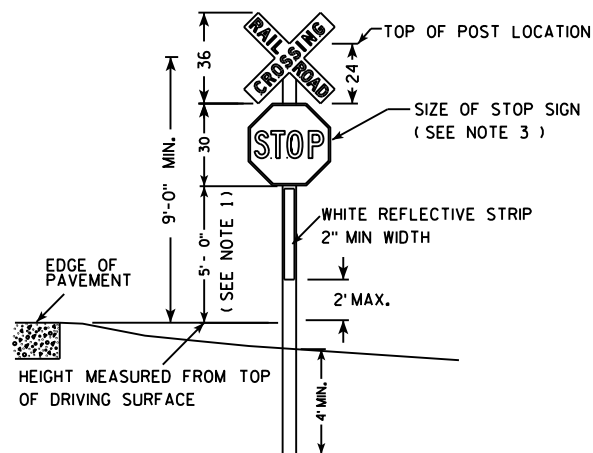


30" X 30" STOP SIGN

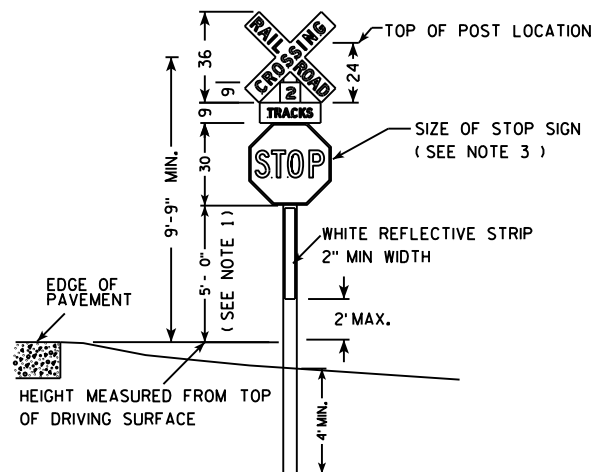

30" X 30" STOP SIGN

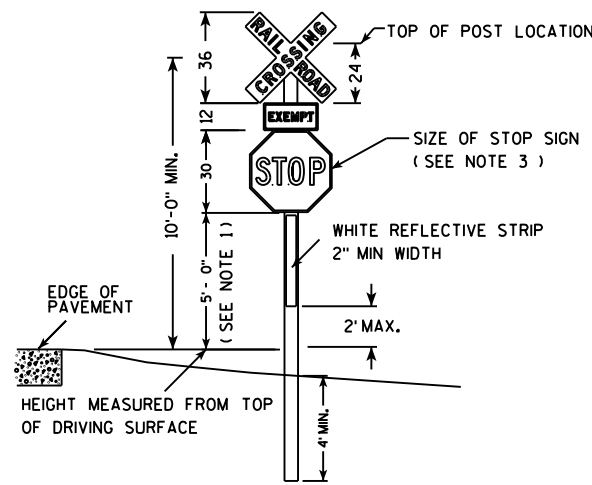

30" X 30" STOP SIGN

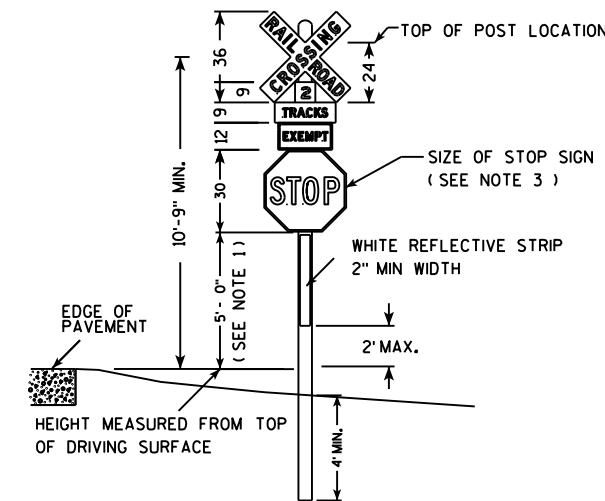

NOTES: 1.) 5'-0" MIN. MOUNTING HEIGHT REQUIRED.
7'-0" MIN. MOUNTING HEIGHT IN AREAS WITH
PEDESTRIAN OR PARKING CONFLICTS

2.) STOP SIGNS SHALL HAVE A MINIMUM OF HIGH
INTENSITY REFLECTIVE SHEETING (EITHER
ENCAPSULATED BEAD OR PRISMATIC.)

3.) PER WISCONSIN MUTCD SECTION 8B.04
THE STOP SIGN SHOULD BE PLACED ON A SEPARATE POST
NEXT TO THE CROSSBUCK WHEN PRACTICAL.

4.) PER SECTION 8B.04 OF THE 2009 MUTCD, THE
USAGE OF STOP SIGNS SHOULD BE BASED ON AN
ENGINEERING STUDY.

TYPICAL INSTALL OF STOP SIGN AT RR

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 3/14/17 PLATE NO. A4-16.2

PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E