Wisconsin Department of Transportation

Division of Transportation Systems Development
Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

October 8, 2026

NOTICE TO ALL CONTRACTORS:

Proposal #13: 4540-35-71
Sheboygan Falls – Howards Grove
STH 23 – STH 42
STH 32
Sheboygan County

Letting of October 13, 2026

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
4	Traffic

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
305.0110	Base Aggregate Dense ¾-Inch	Ton	3530	-480	3050

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
305.0120	Base Aggregate Dense 1 ¼-Inch	Ton	0	500	500

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
13	Revised to change Base Aggregate Dense to 1 ¼-Inch
63	Revised ¾-Inch and 1 ¼-Inch Base Aggregate Quantities

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

4540-35-71

October 13, 2026

Special Provisions

4. Traffic


Replace paragraph three with the following:

During milling and paving operations, the roadway width may be reduced to one 12’ lane with the use of flagging to maintain full access. Limit the section of one lane roadway to a maximum length of 1.5 miles.

Schedule of Items
Attached, dated October 8, 2026, are the revised Schedule of Items Page 1 - 7.


Plan Sheets
The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 13 and 66.

END OF ADDENDUM

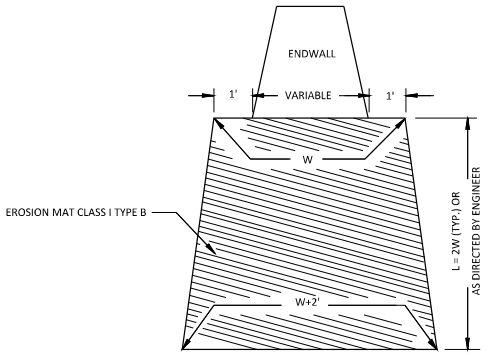


EROSION MAT URBAN CLASS 1 TYPE B TREATMENT AT CULVERTS

Addendum No. 01
ID 4540-35-71
Revised Sheet 13
October 8, 2026

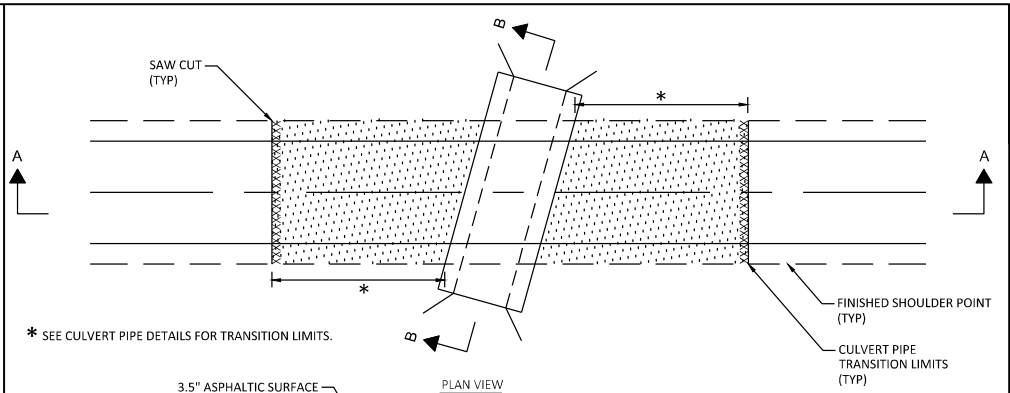


* SEE CULVERT PIPE DETAILS FOR TRANSITION LIMITS.

PLAN VIEW

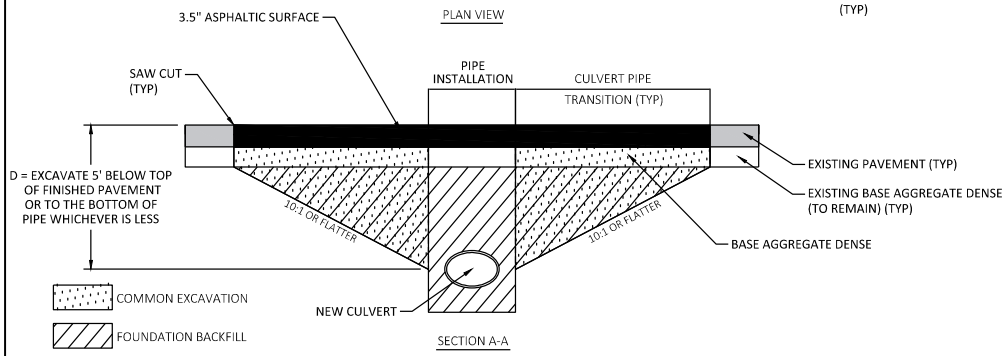

SECTION A-A

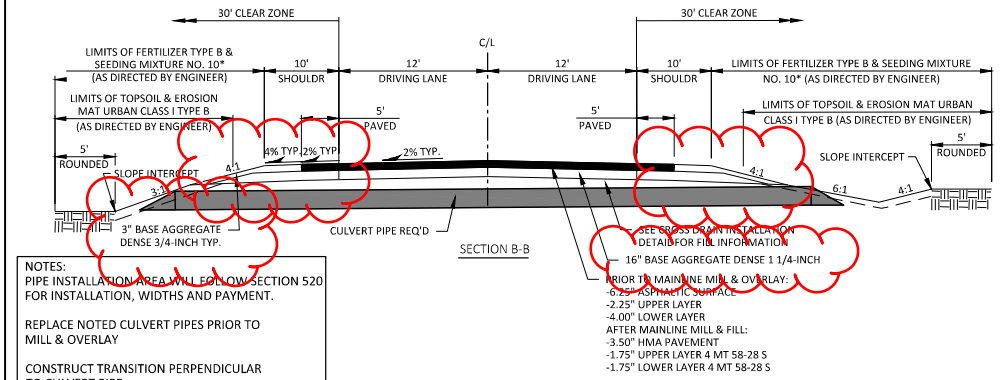

SECTION B-B

NOTES:
PIPE INSTALLATION AREA WILL FOLLOW SECTION 520 FOR INSTALLATION, WIDTHS AND PAYMENT.

REPLACE NOTED CULVERT PIPES PRIOR TO MILL & OVERLAY

CONSTRUCT TRANSITION PERPENDICULAR TO CULVERT PIPE.

PAVEMENT SAW CUT TO BE PERPENDICULAR TO ROADWAY ALIGNMENT.

CULVERT REPLACEMENT DETAIL

STA. 138+43
STA. 160+82

PROJECT NO: 4540-35-71	HWY: STH 32	COUNTY: SHEBOYGAN	CONSTRUCTION DETAILS	SHEET 13	E

ALL BID ITEMS ARE CATEGORY 0010 UNLESS OTHERWISE NOTED

BASE AGGREGATE DENSE

STATION - STATION	LOCATION	BASE AGGREGATE DENSE 3/4-INCH 305.0110 (TON)	BASE AGGREGATE DENSE 1 1/4-INCH 305.0120 (TON)	WATER 624.0100 (MGAL)
76+93 - 193+00	MAINLINE	1609	-	24.1
193+00 - 205+34	MAINLINE	83	-	1.2
205+34 - 300+46	MAINLINE	1315	-	19.7
138+43	30-INCH CULVERT REPLACEMENT	22	255	3.8
160+82	24-INCH CULVERT REPLACEMENT	21	245	3.7
	DRIVEWAYS	1	-	0.1
	TOTALS =	3050	500	53

RUMBLE STRIPS

STATION - STATION	LOCATION	465.0520 ASPHALTIC RUMBLE STRIPS, SHOULDER (LF)	465.0560 ASPHALTIC RUMBLE STRIPS, CENTERLINE (LF)
76+93 - 300+46	MAINLINE	35,800	18,950
	TOTALS =	35,800	18,950

HMA PAVEMENT

STATION - STATION	LOCATION	455.0605 TACK COAT (GAL)	460.6224 HMA PAVEMENT 4 MT 58-28 S (TON)	465.0105 ASPHALTIC SURFACE (TON)	465.0110 ASPHALTIC SURFACE PATCHING (TON)	465.0120 ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES (TON)
76+93 - 385+07	MAINLINE	14,630	23,920	100	150*	5
	TOTALS =	14,630	23,920	100	150	5

NOTES:
* 100 TONS IS FOR WEDGING AND LEVELING, SPOT LANE FAILURES, AND EDGE REPAIRS AS NEEDED. 50 TONS IS FOR FILLING POTHOLES, TRAFFIC POP-OUTS, AND FOR RAMPING AT THE BUTT JOINT SAW CUTS.

HMA PAVEMENT PWL TEST STRIPS

LOCATION	460.0105.S HMA PERCENT WITHIN LIMITS (PWL) TEST STRIP VOLUMETRICS (EACH)	460.0110.S HMA PERCENT WITHIN LIMITS (PWL) TEST STRIP DENSITY (EACH)
PROJECT	1	2
TOTALS =	1	2

PWL MIXTURE USE TABLE

The following acceptance criteria are applicable for this project:

LOCATION	STATION	MIXTURE USE	UNDERLYING SURFACE	BID ITEM	TONS	THICKNESS	QUALITY MANAGEMENT PROGRAM TO BE USED FOR: MIXTURE ACCEPTANCE	QUALITY MANAGEMENT PROGRAM TO BE USED FOR: DENSITY ACCEPTANCE
12 foot Driving Lanes	76+93 - 385+07	Upper Layer	4 MT 58-28 S	4 MT 58-28 S	8,260	1.75	PWL Incentive Air Voids HMA Pavement 460.2010	Incentive Density PWL HMA Pavement 460.2005
12 foot Driving Lanes	76+93 - 385+07	Lower Layer	Milled Surface	4 MT 58-28 S	8,260	1.75	PWL Incentive Air Voids HMA Pavement 460.2010	Incentive Density PWL HMA Pavement 460.2005
5 foot shoulders	76+93 - 300+46	Upper Layer	4 MT 58-28 S	4 MT 58-28 S	2,510	1.75	PWL Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for the incentive
5 foot shoulders	76+93 - 300+46	Lower Layer	Milled Surface	4 MT 58-28 S	2,510	1.75	PWL Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for the incentive
Bypass Lanes, Right Turn Lanes, Intersection Tapers, & Side Roads	76+93 - 385+07	Upper Layer	4 MT 58-28 S	4 MT 58-28 S	1,190	1.75	PWL Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for the incentive
Bypass Lanes, Right Turn Lanes, Intersection Tapers, & Side Roads	76+93 - 385+07	Lower Layer	Milled Surface	4 MT 58-28 S	1,190	1.75	PWL Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for the incentive

Addendum No. 01
ID 4540-35-71
Revised Sheet 66
October 8, 2026

Proposal ID: 20261013013 **Project(s):** 4540-35-71

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	203.0100 Removing Small Pipe Culverts	2.000 EACH	_____.____	_____.____
0004	204.0110 Removing Asphaltic Surface	230.000 SY	_____.____	_____.____
0006	204.0115 Removing Asphaltic Surface Butt Joints	200.000 SY	_____.____	_____.____
0008	204.0120 Removing Asphaltic Surface Milling	118,100.000 SY	_____.____	_____.____
0010	204.0130 Removing Curb	110.000 LF	_____.____	_____.____
0012	204.0150 Removing Curb & Gutter	870.000 LF	_____.____	_____.____
0014	204.0155 Removing Concrete Sidewalk	460.000 SY	_____.____	_____.____
0016	204.0180 Removing Delineators and Markers	12.000 EACH	_____.____	_____.____
0018	205.0100 Excavation Common	700.000 CY	_____.____	_____.____
0020	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 4540-35-71	1.000 EACH	_____.____	_____.____
0022	213.0100 Finishing Roadway (project) 01. 4540-35-71	1.000 EACH	_____.____	_____.____
0024	305.0110 Base Aggregate Dense 3/4-Inch	3,050.000 TON	_____.____	_____.____
0026	455.0605 Tack Coat	14,630.000 GAL	_____.____	_____.____
0028	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	1.000 EACH	_____.____	_____.____
0030	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	2.000 EACH	_____.____	_____.____

Proposal ID: 20261013013 **Project(s):** 4540-35-71

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	460.2005 Incentive Density PWL HMA Pavement	16,520.000 DOL	1.00000	16,520.00
0034	460.2007 Incentive Density HMA Pavement Longitudinal Joints	12,360.000 DOL	1.00000	12,360.00
0036	460.2010 Incentive Air Voids HMA Pavement	23,920.000 DOL	1.00000	23,920.00
0038	460.6224 HMA Pavement 4 MT 58-28 S	23,920.000 TON	_____.____	_____.____
0040	465.0105 Asphaltic Surface	100.000 TON	_____.____	_____.____
0042	465.0110 Asphaltic Surface Patching	150.000 TON	_____.____	_____.____
0044	465.0120 Asphaltic Surface Driveways and Field Entrances	5.000 TON	_____.____	_____.____
0046	465.0520 Asphaltic Rumble Strips, Shoulder	35,800.000 LF	_____.____	_____.____
0048	465.0560 Asphaltic Rumble Strips, Centerline	18,950.000 LF	_____.____	_____.____
0050	520.8700 Cleaning Culvert Pipes	4.000 EACH	_____.____	_____.____
0052	521.1024 Apron Endwalls for Culvert Pipe Steel 24-Inch	4.000 EACH	_____.____	_____.____
0054	522.0424 Culvert Pipe Reinforced Concrete Class IV 24-Inch	68.000 LF	_____.____	_____.____
0056	522.0430 Culvert Pipe Reinforced Concrete Class IV 30-Inch	70.000 LF	_____.____	_____.____
0058	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	2.000 EACH	_____.____	_____.____

Proposal ID: 20261013013 **Project(s):** 4540-35-71

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0060	522.1030 Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	2.000 EACH	_____.____	_____.____
0062	601.0411 Concrete Curb & Gutter 30-Inch Type D	870.000 LF	_____.____	_____.____
0064	601.0600 Concrete Curb Pedestrian	180.000 LF	_____.____	_____.____
0066	602.0405 Concrete Sidewalk 4-Inch	4,890.000 SF	_____.____	_____.____
0068	602.0505 Curb Ramp Detectable Warning Field Yellow	250.000 SF	_____.____	_____.____
0070	602.0605 Curb Ramp Detectable Warning Field Radial Yellow	82.000 SF	_____.____	_____.____
0072	611.8110 Adjusting Manhole Covers	17.000 EACH	_____.____	_____.____
0074	611.8115 Adjusting Inlet Covers	2.000 EACH	_____.____	_____.____
0076	611.8120.S Cover Plates Temporary	28.000 EACH	_____.____	_____.____
0078	618.0100 Maintenance and Repair of Haul Roads (project) 01. 4540-35-71	1.000 EACH	_____.____	_____.____
0080	619.1000 Mobilization	1.000 EACH	_____.____	_____.____
0082	624.0100 Water	53.000 MGAL	_____.____	_____.____
0084	625.0100 Topsoil	750.000 SY	_____.____	_____.____
0086	627.0200 Mulching	180.000 SY	_____.____	_____.____
0088	628.1504 Silt Fence	380.000 LF	_____.____	_____.____

Proposal ID: 20261013013 **Project(s):** 4540-35-71

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0090	628.1520 Silt Fence Maintenance	760.000 LF	_____.____	_____.____
0092	628.1905 Mobilizations Erosion Control	4.000 EACH	_____.____	_____.____
0094	628.1910 Mobilizations Emergency Erosion Control	2.000 EACH	_____.____	_____.____
0096	628.2008 Erosion Mat Urban Class I Type B	470.000 SY	_____.____	_____.____
0098	628.7005 Inlet Protection Type A	2.000 EACH	_____.____	_____.____
0100	628.7015 Inlet Protection Type C	8.000 EACH	_____.____	_____.____
0102	628.7555 Culvert Pipe Checks	8.000 EACH	_____.____	_____.____
0104	629.0210 Fertilizer Type B	1.000 CWT	_____.____	_____.____
0106	630.0110 Seeding Mixture No. 10	14.000 LB	_____.____	_____.____
0108	630.0140 Seeding Mixture No. 40	8.000 LB	_____.____	_____.____
0110	630.0160 Seeding Mixture No. 60	1.000 LB	_____.____	_____.____
0112	630.0500 Seed Water	17.000 MGAL	_____.____	_____.____
0114	633.5200 Markers Culvert End	12.000 EACH	_____.____	_____.____
0116	638.4000 Moving Small Sign Supports	4.000 EACH	_____.____	_____.____
0118	642.5001 Field Office Type B	1.000 EACH	_____.____	_____.____
0120	643.0300 Traffic Control Drums	1,890.000 DAY	_____.____	_____.____

Proposal ID: 20261013013 **Project(s):** 4540-35-71

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0122	643.0900 Traffic Control Signs	3,782.000 DAY	_____.____	_____.____
0124	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.____	_____.____
0126	643.3105 Temporary Marking Line Paint 4-Inch	2,790.000 LF	_____.____	_____.____
0128	643.3165 Temporary Marking Line Paint 6-Inch	156,020.000 LF	_____.____	_____.____
0130	643.3170 Temporary Marking Line Epoxy 6-Inch	30,770.000 LF	_____.____	_____.____
0132	643.5000 Traffic Control	1.000 EACH	_____.____	_____.____
0134	644.1440 Temporary Pedestrian Surface Matting	670.000 SF	_____.____	_____.____
0136	644.1601 Temporary Pedestrian Curb Ramp	224.000 DAY	_____.____	_____.____
0138	644.1605 Temporary Pedestrian Detectable Warning Field	300.000 SF	_____.____	_____.____
0140	644.1810 Temporary Pedestrian Barricade	2,420.000 LF	_____.____	_____.____
0142	644.1900.S Temporary Audible Message Devices	546.000 DAY	_____.____	_____.____
0144	646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch	92,400.000 LF	_____.____	_____.____
0146	646.6120 Marking Stop Line Epoxy 18-Inch	75.000 LF	_____.____	_____.____
0148	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	1,490.000 LF	_____.____	_____.____
0150	646.8120 Marking Curb Epoxy	590.000 LF	_____.____	_____.____

Proposal ID: 20261013013 **Project(s):** 4540-35-71

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0152	646.9000 Marking Removal Line 4-Inch	1,990.000 LF	_____.____	_____.____
0154	646.9002 Marking Removal Line 6-Inch	1,310.000 LF	_____.____	_____.____
0156	650.5500 Construction Staking Curb Gutter and Curb & Gutter	870.000 LF	_____.____	_____.____
0158	650.6000 Construction Staking Pipe Culverts	2.000 EACH	_____.____	_____.____
0160	650.8000 Construction Staking Resurfacing Reference	30,688.000 LF	_____.____	_____.____
0162	650.9000 Construction Staking Curb Ramps	23.000 EACH	_____.____	_____.____
0164	650.9500 Construction Staking Sidewalk (project) 01. 4540-35-71	1.000 EACH	_____.____	_____.____
0166	650.9911 Construction Staking Supplemental Control (project) 01. 4540-35-71	1.000 EACH	_____.____	_____.____
0168	680.0100 Public Land Survey Monument Verify and Reset	8.000 EACH	_____.____	_____.____
0170	690.0150 Sawing Asphalt	1,356.000 LF	_____.____	_____.____
0172	690.0250 Sawing Concrete	252.000 LF	_____.____	_____.____
0174	740.0440 Incentive IRI Ride	46,500.000 DOL	1.00000	46,500.00
0176	SPV.0035 Special 01. Foundation Backfill	370.000 CY	_____.____	_____.____
0178	SPV.0060 Special 01. Adjusting Sanitary Manhole Covers	9.000 EACH	_____.____	_____.____

Proposal ID: 20261013013 **Project(s):** 4540-35-71

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0180	305.0120 Base Aggregate Dense 1 1/4-Inch	500.000 TON	_____._____	_____._____

Section: 0001 **Total:** _____._____

Total Bid: _____._____