



BASE ANGLE DETAIL


CENTERED ON PANEL JOINT OR AT EACH FOOTING END OR STEP



WALL PANEL JOINT DETAIL

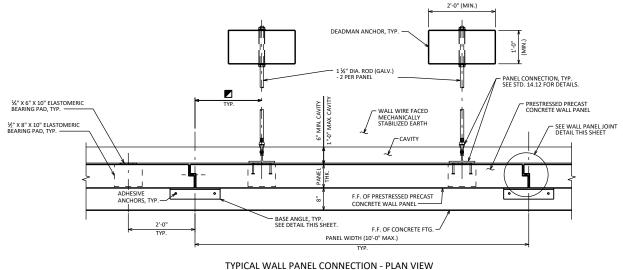

ALL ITEMS SHOWN ARE INCLUDED IN BID ITEM "PRESTRESED PRECAST CONCRETE WALL PANEL".

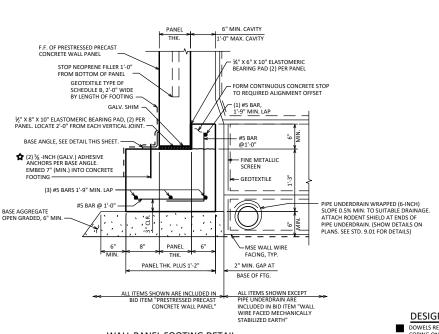


WALL PANEL FOOTING DETAIL

ADHESIVE ANCHORS SHALL CONFORM TO SECTION 502.2.12 OF THE STANDARD SPECIFICATIONS.

DESIGNER NOTE

DOWELS REQUIRED FOR CAST-IN-PLACE CONCRETE COPING ONLY. IF CAST-IN-PLACE CONCRETE COPING PROPOSED, INCLUDE THE FOLLOWING NOTE:

#4 DOWELS, 1'-3" LONG AT 2'-0" MAX. SPACING ALTERNATE ANCHORAGE: ½" DIA. ELECTROPLATED FERRULE LOOP INSERT (MEDIUM HIGH CARBON WIRE) OR APPROVED EQUAL



PANFI


ELEVATION PRESTRESSED PRECAST CONCRETE WALL PANEL

DO NOT PROVIDE BILL OF BARS. BAR STEEL REINF. AND CONCRETE ARE INCLUDED IN BID ITEM "PRESTRESSED PRECAST CONCRETE WALL PANEL".

PRECAST PANELS 6 FEET OR LESS IN HEIGHT DO NOT REQUIRE PRESTRESSING STRANDS.

LEGEND

USE 2'-0" ON 10'-0" PANELS USE 1'-0" ON PANELS LESS THAN 10'-0"



SECTION A-A

PRESTRESSING STRANDS NOT SHOWN FOR CLARITY.

MSE WALL WIRE FACING 2



APPROVED: Laura Shadewald

7-18