


$\leftarrow * \rightarrow \leftarrow 6 \rightarrow \leftarrow 3 \frac{1}{2} \rightarrow$
 $\leftarrow * \rightarrow \leftarrow 7 \rightarrow \leftarrow 3 \frac{1}{4} \rightarrow$
 $\leftarrow * \rightarrow$
 $\leftarrow * \rightarrow$
 5/8" Border
 1 1/4" Radius
 D1-4

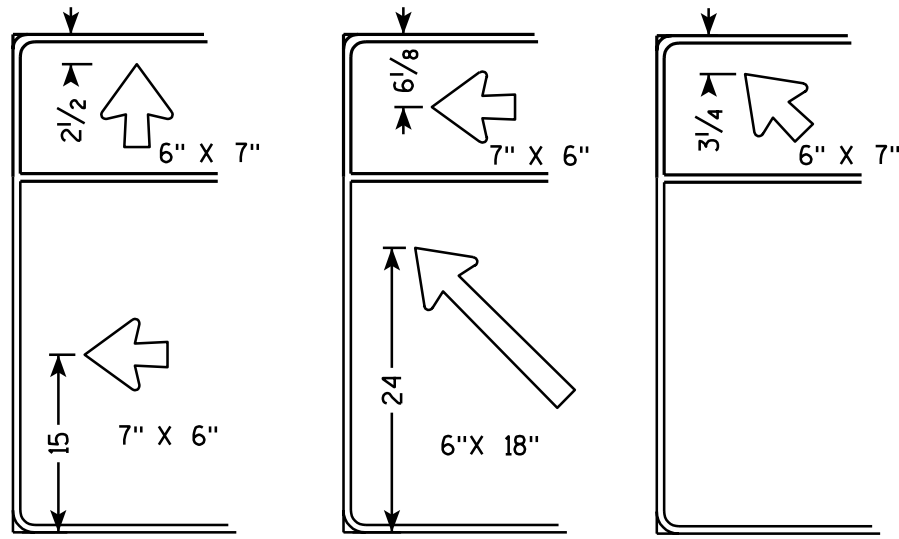

TYPICAL ARROW PLACEMENTS

TYPICAL EXAMPLES


NOTES

1. All signs are Type II - Type H Reflective
2. Color:
Background - Green
Message - White - Type H Reflective
3. Message Series for 3 3/4" L C is Series C and Series E for 4 1/2" L C and 6" L C.
4. Overall length of these signs is in 6" increments.
5. Arrows as per standard plate A1-2.
6. Tilt arrow is always at 45°.
7. Center shorter destination over or under longer destination.
8. Each line of copy including arrow or a grouping of two lines with arrow are centered on the board.

* Minimum dimension normally height of upper case letter.



$\leftarrow * \rightarrow \leftarrow 8 \rightarrow \leftarrow 6 \rightarrow$
 $\leftarrow * \rightarrow \leftarrow 8 \frac{1}{2} \rightarrow \leftarrow 6 \rightarrow$
 $\leftarrow * \rightarrow$
 $\leftarrow * \rightarrow$
 3/4" Border
 2 1/4" Radius
 D1-4

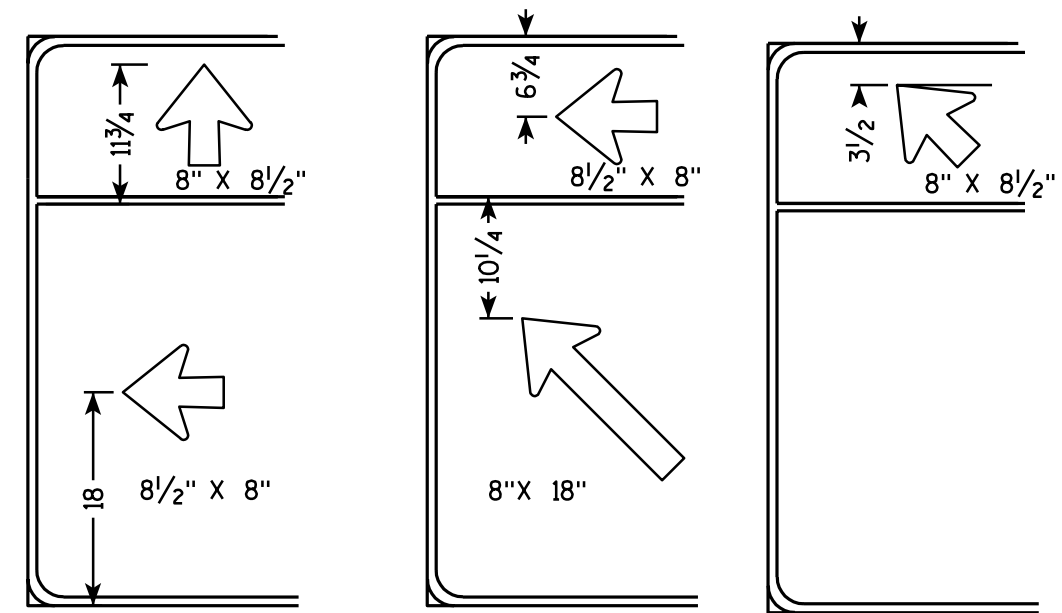

TYPICAL ARROW PLACEMENTS

7

7

DESTINATION - DIRECTIONAL SIGNS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> For State Traffic Engineer
DATE 3/20/07	PLATE NO. A11-11 J.1